

DESCRIPTION

Add beautiful light to your space with these Spec Grade color selectable architectural LED linear pendant fixtures. Featuring an ultra-thin profile and semi-transparent optics, this fixture virtually disappears when turned off.

FEATURES

- Efficiently replaces up to a 2 lamp fluorescent fixture
- Light output will vary depending on the wattage and color temperature selected, see Selectable Table for full breakdown
- High color rendering index (CRI) of 90 makes color appear more accurate
- Comes with a 5-foot power cord and two 5-foot aircraft cables for pendant mounting; surface and wall mounting accessories sold separately, see Fixture Accessories section for more information
- Dimmable with 0-10V dimmers; see Compatible Dimmers section for full list of compatible dimmers
- Fixture wattage and color temperature is adjusted via dip switches on the driver; see installation instructions for more details

LISTINGS

- UL rated for damp locations
- IP20

PERFORMANCE

- CRI: 90+
- CCT: 3000K, 3500K, and 4000K
- LED L70 Life Hours @ 25°C: >54,000 hours

THERMAL

- -4°F to 104°F (-20°C to 40°C) operating temperature

ELECTRICAL

- THD: <20%
- Power Factor: >0.9
- Input Voltage: 120-277V
- Dimmable power supply (1-10V)
- Surge Protection: 1kV


INSTALLATION

- Designed for suspension with included 5-foot aircraft cables and round canopies (2-inch & 4-inch) or surface/wall mounting with bracket kit (PLT-90331, sold separately); see installation instructions for more details

CONSTRUCTION

- Extruded aluminum housing with white powder coat finish
- Frosted PMMA lens protects LEDs while evenly distributing light

project name	type
catalog number	
comments	voltage
approved by	date

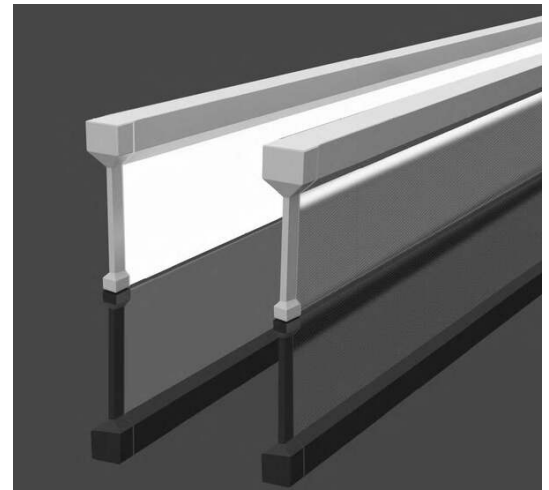

WARRANTY

- 5 year limited warranty; see pltsolutions.com for warranty details

APPLICATIONS

- Offices
- Conference Rooms
- Classrooms
- Retail Spaces
- Hotels
- Lobbies
- Restaurants
- Corridors
- Stairwells

PERFORMANCE SUMMARY

Item #	Watts*	CCT*	CRI	Dimming	Voltage	Replaces	Finish	Length	Default Setting
PLT-90332	20/ 30/ 40	3000K/ 3500K/ 4000K	90+	0-10V	120-277V	2 Lamp Fluorescent	White	4'	40W, 3500K

* See Selectable Table for full breakdown

SELECTABLE TABLE

Wattage	CCT	Lumens	Efficacy
20	3000K	2400	120
	3500K	2600	130
	4000K	2500	125
30	3000K	3510	117
	3500K	3810	127
	4000K	3660	122
40	3000K	4600	115
	3500K	5000	125
	4000K	4800	120


FIXTURE ACCESSORIES

SKU	Description
PLT-90331	Surface and Wall Mount Accessory for PLT-90332

COMPATIBLE DIMMERS

Brand	Model #
Lutron	Diva-Dvtv
Leviton	IP-710-DL


DIMENSIONS

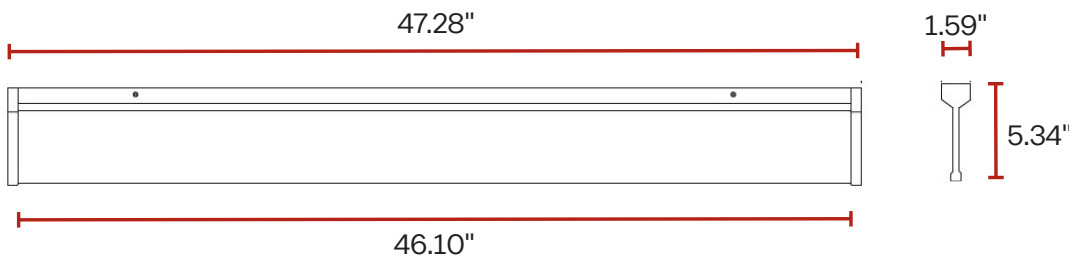


DIMENSIONS:

Top Length: 47.28"
 Top Width: 1.59"
 Bottom Length: 46.10"
 Bottom Width: 0.57"
 Height: 5.34"
 Weight: 5.07 lbs

PENDANT @ 3000K

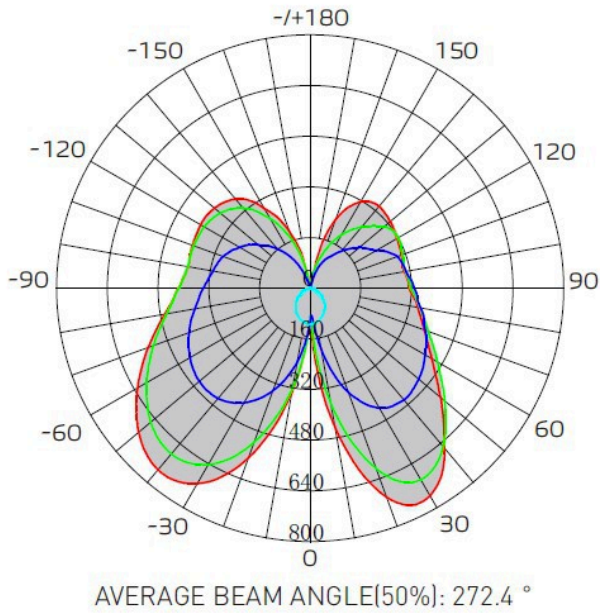

SURFACE/WALL MOUNTED

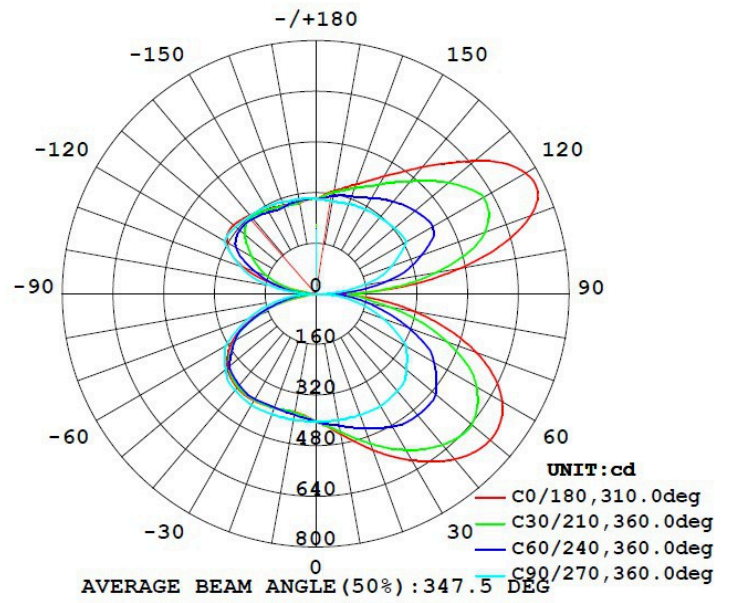

WARNINGS

- Only use this pendant fixture with the dimmers listed in the compatibility list. Using this downlight with incompatible dimmers may cause performance issues including humming, buzzing, flickering, and poor dimming performance.