

Project Name:	Type:
Part Number:	Date:

PREMIUM FILAMENT BULB FAMILY

FEATURES

- Suitable to replace 11W, 25W, 40W and 60W incandescent
- Vintage look fits most decorative applications
- 320° omnidirectional beam angle
- Smooth dimming with most forward and reverse phase controls*
- Comfortable warm diffused light
- Full glass construction
- Suitable for use in wet locations, not suitable for use in totally enclosed fixtures
- Fixture operating temperature: -13°F to 95°F (-25°C to 35°C)
- Lamp ambient temperature: -13°F to 113°F (-25°C to 45°C)
- Rated Lifetime (L70): 15,000hrs
- 3 year limited warranty**



060523



SPECIFICATIONS

Product	Model	Equiv.	CCT	Finish	Wattage (W)	Lumens (LM)	Efficacy (LPW)	Power Factor	Input Voltage	CRI	Beam Angle	Dim.*	UL Location	Fixture Rating	ES / T20
36075	3FT6DIM/820/A/R	25W	2000K	Amber	3	110	37	≥0.7	120V	82	320°	YES	Wet	Non-Enclosed	N.A. / N.A.
36076	3.5FT10DIM/820/A/R	25W	2000K	Amber	3.5	250	71	≥0.7	120V	82	320°	YES	Wet	Non-Enclosed	N.A. / N.A.
36077	1FS14/827/R	11W	2700K	Clear	1	55	55	≥0.7	120V	82	320°	NO	Wet	Non-Enclosed	N.A. / N.A.
36078	1FS14/820/A/R	11W	2000K	Amber	1	35	35	≥0.7	120V	82	320°	NO	Wet	Non-Enclosed	N.A. / N.A.
36079	5FA19DIM/927/R	40W	2700K	Clear	5	450	90	≥0.7	120V	92	320°	YES	Wet	Non-Enclosed	✓ / ✓
36080	5FA19DIM/927/FR/R	40W	2700K	Frosted	5	450	90	≥0.7	120V	92	320°	YES	Wet	Non-Enclosed	✓ / ✓
36081	5FA19DIM/820/A/R	40W	2000K	Amber	5	340	68	≥0.7	120V	82	320°	YES	Wet	Non-Enclosed	N.A. / N.A.
36082	9FA19DIM/927/R	60W	2700K	Clear	9	810	90	≥0.7	120V	92	320°	YES	Wet	Non-Enclosed	✓ / ✓
36083	9FA19DIM/927/FR/R	60W	2700K	Frosted	9	810	89	≥0.7	120V	92	320°	YES	Wet	Non-Enclosed	✓ / ✓
36084	7.5FA19DIM/820/A/R	60W	2000K	Amber	7.5	600	80	≥0.7	120V	82	320°	YES	Wet	Non-Enclosed	N.A. / N.A.
36085	7.5FA19DIM/827/SB/R	60W	2700K	Silver Bowl	7.5	700	93	≥0.7	120V	82	320°	YES	Wet	Non-Enclosed	N.A. / N.A.

* This lamp might not be compatible with all dimmers. Please visit www.greencreative.com for compatibility information.

** Please visit www.greencreative.com for Limited Warranty terms.


Project Name:	Type:
Part Number:	Date:



GREENCREATIVE

PREMIUM FILAMENT BULB FAMILY

DIMENSION & WEIGHT

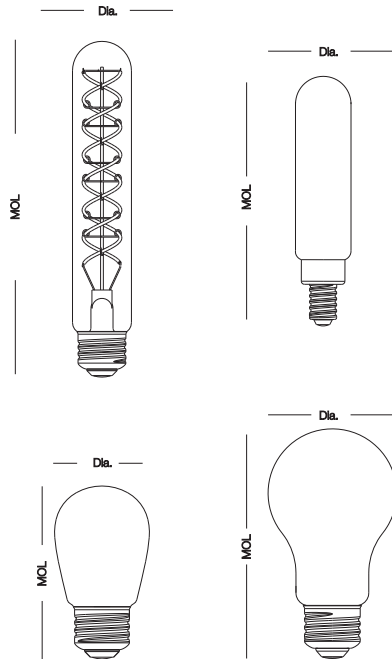

Product	Model	Base	MOL	Dia.	Weight
36075	3FT6DIM/820/A/R	E12	3-9/16"	15/16"	0.03lb
36076	3.5FT10DIM/820/A/R	E26	7-7/16"	1-1/8"	0.1lb
36077	1FS14/827/R	E26	3-3/8"	1-3/4"	0.04lb
36078	1FS14/820/A/R	E26	3-3/8"	1-3/4"	0.04lb
36079	5FA19DIM/927/R	E26	4-3/16"	2-3/8"	0.07lb
36080	5FA19DIM/927/FR/R	E26	4-3/16"	2-3/8"	0.07lb
36081	5FA19DIM/820/A/R	E26	4-3/16"	2-3/8"	0.07lb
36082	9FA19DIM/927/R	E26	4-3/16"	2-3/8"	0.07lb
36083	9FA19DIM/927/FR/R	E26	4-3/16"	2-3/8"	0.07lb
36084	7.5FA19DIM/820/A/R	E26	4-3/16"	2-3/8"	0.07lb
36085	7.5FA19DIM/827/SB/R	E26	4-3/16"	2-3/8"	0.07lb

ORDERING INFORMATION

Model	Product Series	Master Carton			Shipping Carton		
		Case Qty	Case Dimensions (LxWxH)	Case Weight	Case Qty	Case Dimensions (LxWxH)	Case Weight
36075	3FT6DIM/820/A/R	6 PCS	4-15/16" x 3-5/16" x 4-3/4"	0.99lb	24 PCS	10-5/8" x 7-1/2" x 5-5/16"	4.41lb
36076	3.5FT10DIM/820/A/R	12 PCS	4-11/16" x 3-3/16" x 8-5/8"	0.66lb	48PCS	10" x 7" x 9-7/16"	4.30lb
36077	1FS14/827/R	12 PCS	6-5/16" x 4-5/16" x 8-1/16"	1.01lb	48 PCS	13-3/16" x 9-1/4" x 8-5/8"	4.56lb
36078	1FS14/820/A/R	12 PCS	6-5/16" x 4-5/16" x 8-1/16"	1.01lb	48 PCS	13-3/16" x 9-1/4" x 8-5/8"	4.56lb
36079	5FA19DIM/927/R	6 PCS	8 -1/4" x 5-9/16" x 5-1/8"	1.08lb	24 PCS	17-1/8" x 11-13/16" x 6-1/8"	4.78lb
36080	5FA19DIM/927/FR/R	6 PCS	8 -1/4" x 5-9/16" x 5-1/8"	1.08lb	24 PCS	17-1/8" x 11-13/16" x 6-1/8"	4.78lb
36081	5FA19DIM/820/A/R	6 PCS	8 -1/4" x 5-9/16" x 5-1/8"	1.08lb	24 PCS	17-1/8" x 11-13/16" x 6-1/8"	4.78lb
36082	9FA19DIM/927/R	6 PCS	8 -1/4" x 5-9/16" x 5-1/8"	1.08lb	24 PCS	17-1/8" x 11-13/16" x 6-1/8"	4.78lb
36083	9FA19DIM/927/FR/R	6 PCS	8 -1/4" x 5-9/16" x 5-1/8"	1.08lb	24 PCS	17-1/8" x 11-13/16" x 6-1/8"	4.78lb
36084	7.5FA19DIM/820/A/R	6 PCS	8-1/4" x 5-1/2" x 5-5/16"	0.90lb	24 PCS	16-15/16" x 12-3/16" x 6-5/16"	4.34lb
36085	7.5FA19DIM/827/SB/R	6PCS	8 -1/4" x 5-9/16" x 5-1/8"	1.08lb	24 PCS	17-1/8" x 11-13/16" x 6-1/8"	4.78lb

CERTIFICATION INFORMATION

Product	Model	ES ID#
36079	5FA19DIM/927/R	2378398
36080	5FA19DIM/927/FR/R	2378397
36082	9FA19DIM/927/R	2378400
36083	9FA19DIM/927/FR/R	2378399

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.

PREMIUM FILAMENT BULB & DECO

MODEL

Model: 3.3FB11DIM/927/R
3.3FB11DIM/927/E26/R
3.3FB11DIM/927/FR/R
3.5FBA11DIM/820/FT/A/R
3.8FG16.5DIM/927/R
3.8FG16.5DIM/927/E26/R
4FG16.5DIM/820/A/R
3.8FG25DIM/927/R
4FG25DIM/820/A/R
4.5FG25DIM/827/SB/R
5.5FG40DIM/927/R
5.5FB11DIM/927/R
5.5FB11DIM/927/E26/R
3FT6DIM/820/A/R
5FA19DIM/927/R
5FA19DIM/927/FR/R
5FA19DIM/820/A/R
9FA19DIM/927/FR/R
9FA19DIM/927/R
7.5FA19DIM/827/SB/R



DIMMER COMPATIBILITY

Brand	Series	Model	Load (W)	Dimming Range	Compatibility
Lutron	Diva	DV-600P	600	0-100%	Compatible
	Toggler	TG-600P	600	0-100%	Compatible
	Skylark Contour	CTCL-153P	150	0-100%	Compatible
	Diva	DVCL-153P	150	0-100%	Compatible
	Maestro C•L	MACL-153P	150	0-100%	Compatible
	Maestro	MAELV-600	600	0-100%	Compatible
	Skylark Contour	CTELV-303P	300	0-100%	Compatible
	Diva	DVELV-300P	300	0-100%	Compatible
	Nova	NTELV-600P	600	0-100%	Compatible
	Caseta	PD-5NE	250	0-100%	Compatible
Leviton	Sureslide Decora	6674	600	0-100%	Compatible*
	Trimatron	6602	600	-	Not Compatible
	Illumatech	IPE04-1LZ	300	0-100%	Compatible
Cooper	Aspire	9536	1000	-	Not Compatible

*: Not compatible only for these models: 5FA19DIM/927/R; 5FA19DIM/927/FR/R; 5FA19DIM/820/A/R 4.5FG25DIM/827/SB/R; 5.5FG40DIM/927/R; 5.5FB11DIM/927/R; 5.5FB11DIM/927/E26/R.

GREEN CREATIVE has provided this dimmer switch compatibility chart for guidance when selecting a dimmer and lamp combination. Our lamps were tested for compatibility with the above listed dimmers. Dimmers that do not appear on the chart might still be compatible but have not been tested. All testing has been performed with a stable main supply. The quality of the local main, existing installation and wiring, as well as different manufacturer versions of the above dimmers may affect dimming performance. Since no assurance can be provided regarding these factors, it is a general recommendation to perform a test on-site prior to installing the LED lamps.