

| | |
|---------------|-------|
| Project Name: | Type: |
| Part Number: | Date: |



GREENCREATIVE

REFINE PAR FAMILY

FEATURES

- Suitable to replace 50W, 75W, 120W halogen lamps
- Powered by TRUE CHROMA: delivers best in class color accuracy and consistency
- Proprietary designed optic maximizes output, efficacy, color fidelity, and visual comfort
- High CRI and R values (R9 85, R13 95) deliver richer reds and healthier skin tones
- Smooth dimming with existing dimmers*
- Compact size 1:1 halogen form factor
- Spot, Narrow, Flood beam angles
- Suitable for damp locations and totally enclosed fixtures
- Fixture operating temperature: -4°F to 95°F (-20°C to 35°C)
- Lamp ambient temperature: -4°F to 113°F (-20°C to 45°C)
- Rated Lifetime (L70): 50,000hrs
- 5 year limited warranty**



SCAN ME or Click Here



SPECIFICATIONS

| Product | Model | Equiv. | Wattage (W) | CCT | Lumens | Efficacy (LPW) | Input Voltage | Beam Angle | CBCP (cd) | CRI | Dim.* | Power Factor | Base | Fixture Rating | TRUE CHROMA | ES / JA8 / T20 |
|---------|------------------------|--------|-------------|-------|--------|----------------|---------------|------------|-----------|-----|-------|--------------|------|----------------|-------------|----------------|
| 34890 | 6.5PAR20DIM/927SP15 | 50W | 6.5 | 2700K | 520 | 80 | 120V | 15° | 5,000 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |
| 34891 | 6.5PAR20DIM/927NF25 | 50W | 6.5 | 2700K | 560 | 86 | 120V | 25° | 1,800 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |
| 34892 | 6.5PAR20DIM/927FL40 | 50W | 6.5 | 2700K | 560 | 86 | 120V | 40° | 1,100 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |
| 34893 | 6.5PAR20DIM/930SP15 | 50W | 6.5 | 3000K | 550 | 85 | 120V | 15° | 5,300 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |
| 34894 | 6.5PAR20DIM/930NF25 | 50W | 6.5 | 3000K | 580 | 89 | 120V | 25° | 1,900 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |
| 34895 | 6.5PAR20DIM/930FL40 | 50W | 6.5 | 3000K | 580 | 89 | 120V | 40° | 1,200 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |
| 34896 | 6.5PAR20DIM/940FL40 | 50W | 6.5 | 4000K | 600 | 92 | 120V | 40° | 1,300 | 95 | Yes | 0.9 | E26 | Enclosed | NO | √/√/√ |
| 34897 | 6.5PAR20DIM/930FL40/B | 50W | 6.5 | 3000K | 580 | 89 | 120V | 40° | 1,200 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |
| 34898 | 11PAR30DIM/927SP15 | 75W | 11 | 2700K | 950 | 86 | 120V | 15° | 10,000 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |
| 34899 | 11PAR30DIM/927NF25 | 75W | 11 | 2700K | 950 | 86 | 120V | 25° | 4,500 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |
| 34900 | 11PAR30DIM/927FL40 | 75W | 11 | 2700K | 950 | 86 | 120V | 40° | 1,700 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |
| 34901 | 11PAR30DIM/930SP15 | 75W | 11 | 3000K | 990 | 90 | 120V | 15° | 10,600 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |
| 34902 | 11PAR30DIM/930NF25 | 75W | 11 | 3000K | 990 | 90 | 120V | 25° | 4,700 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |
| 34903 | 11PAR30DIM/930FL40 | 75W | 11 | 3000K | 990 | 90 | 120V | 40° | 1,750 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |
| 34904 | 11PAR30DIM/940FL40 | 75W | 11 | 4000K | 1,030 | 94 | 120V | 40° | 1,850 | 95 | Yes | 0.9 | E26 | Enclosed | NO | √/√/√ |
| 34905 | 11PAR30DIM/930FL40/B | 75W | 11 | 3000K | 990 | 90 | 120V | 40° | 1,750 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |
| 34906 | 11PAR30SNDIM/927SP15 | 75W | 11 | 2700K | 950 | 86 | 120V | 15° | 10,000 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |
| 34907 | 11PAR30SNDIM/927NF25 | 75W | 11 | 2700K | 950 | 86 | 120V | 25° | 4,500 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |
| 34908 | 11PAR30SNDIM/927FL40 | 75W | 11 | 2700K | 950 | 86 | 120V | 40° | 1,700 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |
| 34909 | 11PAR30SNDIM/930SP15 | 75W | 11 | 3000K | 990 | 90 | 120V | 15° | 10,600 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |
| 34910 | 11PAR30SNDIM/930NF25 | 75W | 11 | 3000K | 990 | 90 | 120V | 25° | 4,700 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |
| 35939 | 11PAR30SNDIM/930NF25/B | 75W | 11 | 3000K | 990 | 90 | 120V | 25° | 4,700 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |
| 34911 | 11PAR30SNDIM/930FL40 | 75W | 11 | 3000K | 990 | 90 | 120V | 40° | 1,750 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |
| 34912 | 11PAR30SNDIM/940FL40 | 75W | 11 | 4000K | 1,030 | 94 | 120V | 40° | 1,850 | 95 | Yes | 0.9 | E26 | Enclosed | NO | √/√/√ |
| 34913 | 11PAR30SNDIM/930FL40/B | 75W | 11 | 3000K | 990 | 90 | 120V | 40° | 1,750 | 95 | Yes | 0.9 | E26 | Enclosed | C | √/√/√ |

060523




REFINE PAR FAMILY

| SPECIFICATIONS | | | | | | | | | | | | | | | | |
|----------------|---------------------------|--------|-------------|-------|--------|----------------|---------------|------------|-----------|-----|-------|--------------|------|----------------|-------------|------------|
| Product | Model | Equiv. | Wattage (W) | CCT | Lumens | Efficacy (LPW) | Input Voltage | Beam Angle | CBCP (cd) | CRI | Dim.* | Power Factor | Base | Fixture Rating | TRUE CHROMA | ES/JA8/T20 |
| 34916 | 15.5PAR38DIM/927SP15 | 120W | 15.5 | 2700K | 1,320 | 85 | 120V | 15° | 14,000 | 95 | Yes | 0.9 | E26 | Enclosed | | √/√/√ |
| 34917 | 15.5PAR38DIM/927NF25 | 120W | 15.5 | 2700K | 1,320 | 85 | 120V | 25° | 6,750 | 95 | Yes | 0.9 | E26 | Enclosed | | √/√/√ |
| 34918 | 15.5PAR38DIM/927FL40 | 120W | 15.5 | 2700K | 1,320 | 85 | 120V | 40° | 2,800 | 95 | Yes | 0.9 | E26 | Enclosed | | √/√/√ |
| 34919 | 15.5PAR38DIM/930SP15 | 120W | 15.5 | 3000K | 1,370 | 88 | 120V | 15° | 14,700 | 95 | Yes | 0.9 | E26 | Enclosed | | √/√/√ |
| 34920 | 15.5PAR38DIM/930NF25 | 120W | 15.5 | 3000K | 1,370 | 88 | 120V | 25° | 7,000 | 95 | Yes | 0.9 | E26 | Enclosed | | √/√/√ |
| 34921 | 15.5PAR38DIM/930FL40 | 120W | 15.5 | 3000K | 1,370 | 88 | 120V | 40° | 2,900 | 95 | Yes | 0.9 | E26 | Enclosed | | √/√/√ |
| 34922 | 15.5PAR38DIM/940FL40 | 120W | 15.5 | 4000K | 1,420 | 92 | 120V | 40° | 3,000 | 95 | Yes | 0.9 | E26 | Enclosed | NO | √/√/√ |
| 34923 | 15.5PAR38DIM/930NF25/B | 120W | 15.5 | 3000K | 1,370 | 88 | 120V | 25° | 7,000 | 95 | Yes | 0.9 | E26 | Enclosed | | √/√/√ |
| 34924 | 15.5PAR38DIM/930FL40/B | 120W | 15.5 | 3000K | 1,370 | 88 | 120V | 40° | 2,900 | 95 | Yes | 0.9 | E26 | Enclosed | | √/√/√ |
| 34925 | 15.5PAR38DIM/930FL40/GU24 | 120W | 15.5 | 3000K | 1,370 | 88 | 120V | 40° | 2,900 | 95 | Yes | 0.9 | GU24 | Enclosed | | √/√/√ |
| 34914 | 11PAR30/930FL40/277V | 75W | 11 | 3000K | 990 | 90 | 120-277V | 40° | 1,750 | 95 | No | 0.9 | E26 | Enclosed | | √/NA./√ |
| 34915 | 11PAR30/940FL40/277V | 75W | 11 | 4000K | 1,030 | 94 | 120-277V | 40° | 1,850 | 95 | No | 0.9 | E26 | Enclosed | NO | √/NA./√ |
| 34926 | 15.5PAR38/930FL40/277V | 120W | 15.5 | 3000K | 1,370 | 88 | 120-277V | 40° | 2,900 | 95 | No | 0.9 | E26 | Enclosed | | √/NA./√ |
| 34927 | 15.5PAR38/940FL40/277V | 120W | 15.5 | 4000K | 1,420 | 92 | 120-277V | 40° | 3,000 | 95 | No | 0.9 | E26 | Enclosed | NO | √/NA./√ |


*This lamp might not be compatible with all dimmers. Please visit www.greencreative.com for compatibility information.

**Please visit www.greencreative.com for Limited Warranty terms.

DIMENSIONS & WEIGHT



| Model | Base | MOL | Dia. | Weight |
|-----------------------|------|--------|--------|--------|
| 6.5PAR20DIM/927SP15 | E26 | 3-1/4" | 2-1/2" | 0.18lb |
| 6.5PAR20DIM/927NF25 | E26 | 3-1/4" | 2-1/2" | 0.18lb |
| 6.5PAR20DIM/927FL40 | E26 | 3-1/4" | 2-1/2" | 0.18lb |
| 6.5PAR20DIM/930SP15 | E26 | 3-1/4" | 2-1/2" | 0.18lb |
| 6.5PAR20DIM/930NF25 | E26 | 3-1/4" | 2-1/2" | 0.18lb |
| 6.5PAR20DIM/930FL40 | E26 | 3-1/4" | 2-1/2" | 0.18lb |
| 6.5PAR20DIM/940FL40 | E26 | 3-1/4" | 2-1/2" | 0.18lb |
| 6.5PAR20DIM/930FL40/B | E26 | 3-1/4" | 2-1/2" | 0.18lb |

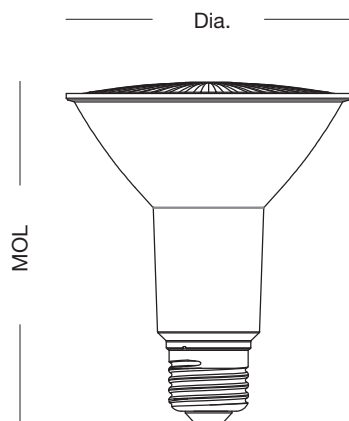


| Model | Base | MOL | Dia. | Weight |
|----------------------|------|---------|----------|--------|
| 11PAR30DIM/927SP15 | E26 | 4-7/16" | 3-11/16" | 0.31lb |
| 11PAR30DIM/927NF25 | E26 | 4-7/16" | 3-11/16" | 0.31lb |
| 11PAR30DIM/927FL40 | E26 | 4-7/16" | 3-11/16" | 0.31lb |
| 11PAR30DIM/930SP15 | E26 | 4-7/16" | 3-11/16" | 0.31lb |
| 11PAR30DIM/930NF25 | E26 | 4-7/16" | 3-11/16" | 0.31lb |
| 11PAR30DIM/930FL40 | E26 | 4-7/16" | 3-11/16" | 0.31lb |
| 11PAR30DIM/940FL40 | E26 | 4-7/16" | 3-11/16" | 0.31lb |
| 11PAR30DIM/930FL40/B | E26 | 4-7/16" | 3-11/16" | 0.31lb |
| 11PAR30/930FL40/277V | E26 | 4-7/16" | 3-11/16" | 0.33lb |
| 11PAR30/940FL40/277V | E26 | 4-7/16" | 3-11/16" | 0.33lb |




REFINE PAR FAMILY

DIMENSIONS & WEIGHT

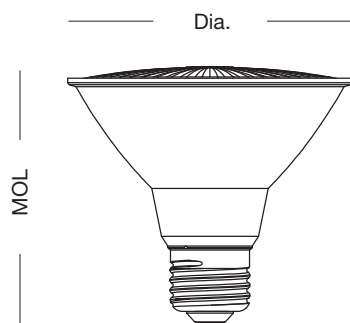


| Model | Base | MOL | Dia. | Weight |
|------------------------|------|--------|----------|--------|
| 11PAR30SNDIM/927SP15 | E26 | 3-1/4" | 3-11/16" | 0.3lb |
| 11PAR30SNDIM/927NF25 | E26 | 3-1/4" | 3-11/16" | 0.3lb |
| 11PAR30SNDIM/927FL40 | E26 | 3-1/4" | 3-11/16" | 0.3lb |
| 11PAR30SNDIM/930SP15 | E26 | 3-1/4" | 3-11/16" | 0.3lb |
| 11PAR30SNDIM/930NF25 | E26 | 3-1/4" | 3-11/16" | 0.3lb |
| 11PAR30SNDIM/930NF25/B | E26 | 3-1/4" | 3-11/16" | 0.3lb |
| 11PAR30SNDIM/930FL40 | E26 | 3-1/4" | 3-11/16" | 0.3lb |
| 11PAR30SNDIM/940FL40 | E26 | 3-1/4" | 3-11/16" | 0.3lb |
| 11PAR30SNDIM/930FL40/B | E26 | 3-1/4" | 3-11/16" | 0.3lb |

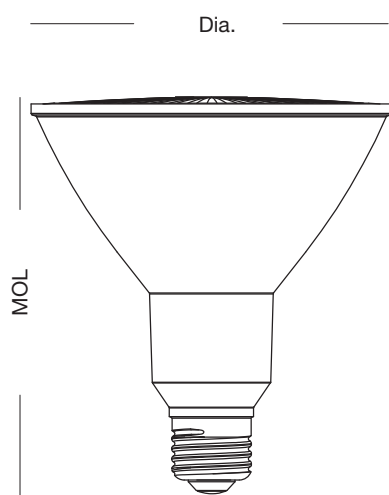

| Model | Base | MOL | Dia. | Weight |
|---------------------------|------|--------|--------|--------|
| 15.5PAR38DIM/927SP15 | E26 | 5-1/8" | 4-5/8" | 0.52lb |
| 15.5PAR38DIM/927NF25 | E26 | 5-1/8" | 4-5/8" | 0.52lb |
| 15.5PAR38DIM/927FL40 | E26 | 5-1/8" | 4-5/8" | 0.52lb |
| 15.5PAR38DIM/930SP15 | E26 | 5-1/8" | 4-5/8" | 0.52lb |
| 15.5PAR38DIM/930NF25 | E26 | 5-1/8" | 4-5/8" | 0.52lb |
| 15.5PAR38DIM/930FL40 | E26 | 5-1/8" | 4-5/8" | 0.52lb |
| 15.5PAR38DIM/940FL40 | E26 | 5-1/8" | 4-5/8" | 0.52lb |
| 15.5PAR38DIM/930NF25/B | E26 | 5-1/8" | 4-5/8" | 0.52lb |
| 15.5PAR38DIM/930FL40/B | E26 | 5-1/8" | 4-5/8" | 0.52lb |
| 15.5PAR38DIM/930FL40/GU24 | GU24 | 5-1/8" | 4-5/8" | 0.54lb |
| 15.5PAR38/930FL40/277V | E26 | 5-1/8" | 4-5/8" | 0.52lb |
| 15.5PAR38/940FL40/277V | E26 | 5-1/8" | 4-5/8" | 0.52lb |

MINIMUM COMPARTMENT DIMENSIONS



Enclosed Fixture


| Diameter | Height |
|----------|--------|
| 6" | 8-1/2" |



REFINE PAR FAMILY


ILLUMINANCE & CANDELA DISTRIBUTION

6.5PAR20DIM/930SP15




| Diameter | Footcandles |
|----------|-------------|
| 0.8 | 589 |
| 1.6 | 147 |
| 2.4 | 65 |
| 3.2 | 37 |
| 3.9 | 24 |

6.5PAR20DIM/930NF25




| Diameter | Footcandles |
|----------|-------------|
| 1.3 | 211 |
| 2.7 | 53 |
| 4.0 | 23 |
| 5.3 | 13 |
| 6.7 | 8 |


6.5PAR20DIM/930FL40




| Diameter | Footcandles |
|----------|-------------|
| 2.2 | 133 |
| 4.4 | 33 |
| 6.6 | 15 |
| 8.7 | 8 |
| 10.9 | 5 |



| Degree | Candela |
|--------|---------|
| 0 | 5300 |
| 5 | 3488 |
| 15 | 564 |
| 25 | 170 |
| 35 | 74 |
| 45 | 40 |




| Degree | Candela |
|--------|---------|
| 0 | 1900 |
| 5 | 1589 |
| 15 | 638 |
| 25 | 219 |
| 35 | 94 |
| 45 | 51 |




| Degree | Candela |
|--------|---------|
| 0 | 1200 |
| 5 | 1100 |
| 15 | 725 |
| 25 | 365 |
| 35 | 174 |
| 45 | 76 |

11PAR30DIM/930SP15




| Diameter | Footcandles |
|----------|-------------|
| 0.8 | 1,178 |
| 1.6 | 294 |
| 2.4 | 131 |
| 3.2 | 74 |
| 3.9 | 47 |

11PAR30DIM/930NF25




| Diameter | Footcandles |
|----------|-------------|
| 1.3 | 522 |
| 2.7 | 131 |
| 4.0 | 58 |
| 5.3 | 33 |
| 6.7 | 21 |


11PAR30DIM/930FL40




| Diameter | Footcandles |
|----------|-------------|
| 2.2 | 194 |
| 4.4 | 49 |
| 6.6 | 22 |
| 8.7 | 12 |
| 10.9 | 8 |



| Degree | Candela |
|--------|---------|
| 0 | 10,600 |
| 5 | 7,008 |
| 15 | 958 |
| 25 | 174 |
| 35 | 102 |
| 45 | 68 |



| Degree | Candela |
|--------|---------|
| 0 | 4,700 |
| 5 | 3,841 |
| 15 | 1,157 |
| 25 | 213 |
| 35 | 81 |
| 45 | 56 |




| Degree | Candela |
|--------|---------|
| 0 | 1,750 |
| 5 | 1,636 |
| 15 | 991 |
| 25 | 592 |
| 35 | 217 |
| 45 | 64 |



REFINE PAR FAMILY


ILLUMINANCE & CANDELA DISTRIBUTION

11PAR30SNDIM/930SP15




| Diameter | Footcandles |
|----------|-------------|
| 0.8 | 1,178 |
| 1.6 | 294 |
| 2.4 | 131 |
| 3.2 | 74 |
| 3.9 | 47 |

11PAR30SNDIM/930NF25




| Diameter | Footcandles |
|----------|-------------|
| 1.3 | 522 |
| 2.7 | 131 |
| 4.0 | 58 |
| 5.3 | 33 |
| 6.7 | 21 |


11PAR30SNDIM/930FL40




| Diameter | Footcandles |
|----------|-------------|
| 2.2 | 194 |
| 4.4 | 49 |
| 6.6 | 22 |
| 8.7 | 12 |
| 10.9 | 8 |



| Degree | Candela |
|--------|---------|
| 0 | 10,600 |
| 5 | 7,008 |
| 15 | 958 |
| 25 | 174 |
| 35 | 102 |
| 45 | 68 |




| Degree | Candela |
|--------|---------|
| 0 | 4,700 |
| 5 | 3,841 |
| 15 | 1,157 |
| 25 | 213 |
| 35 | 81 |
| 45 | 56 |




| Degree | Candela |
|--------|---------|
| 0 | 1,750 |
| 5 | 1,636 |
| 15 | 991 |
| 25 | 592 |
| 35 | 217 |
| 45 | 64 |

15.5PAR38DIM/930SP15




| Diameter | Footcandles |
|----------|-------------|
| 0.8 | 1,633 |
| 1.6 | 408 |
| 2.4 | 181 |
| 3.2 | 102 |
| 3.9 | 65 |

15.5PAR38DIM/930NF25




| Diameter | Footcandles |
|----------|-------------|
| 1.3 | 778 |
| 2.7 | 194 |
| 4.0 | 86 |
| 5.3 | 49 |
| 6.7 | 31 |


15.5PAR38DIM/930FL40




| Diameter | Footcandles |
|----------|-------------|
| 2.2 | 322 |
| 4.4 | 81 |
| 6.6 | 36 |
| 8.7 | 20 |
| 10.9 | 13 |



| Degree | Candela |
|--------|---------|
| 0 | 14,700 |
| 5 | 9,095 |
| 15 | 1,435 |
| 25 | 256 |
| 35 | 93 |
| 45 | 58 |



| Degree | Candela |
|--------|---------|
| 0 | 7,000 |
| 5 | 6,095 |
| 15 | 1,658 |
| 25 | 408 |
| 35 | 137 |
| 45 | 64 |









| Degree | Candela |
|--------|---------|
| 0 | 2,900 |
| 5 | 2,845 |
| 15 | 1,813 |
| 25 | 929 |
| 35 | 300 |
| 45 | 78 |

For other CCT use the following multiplier: 2700K .98, 4000K 1.02



REFINE PAR FAMILY

COLOR ACCURACY & SPECTRAL POWER DISTRIBUTION
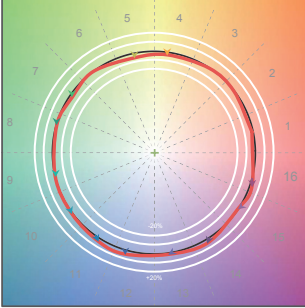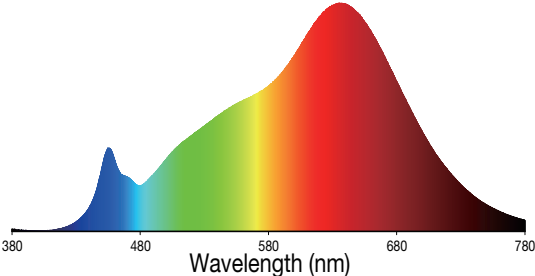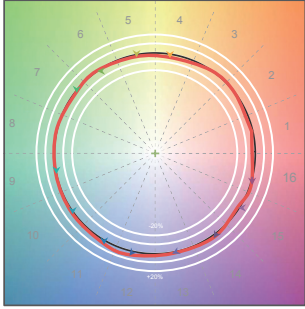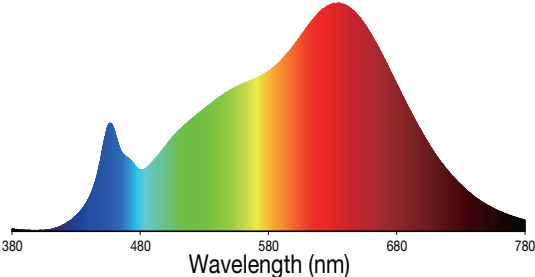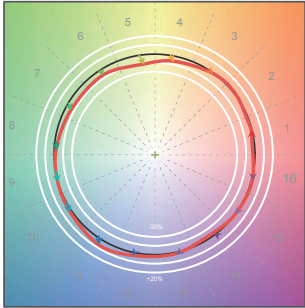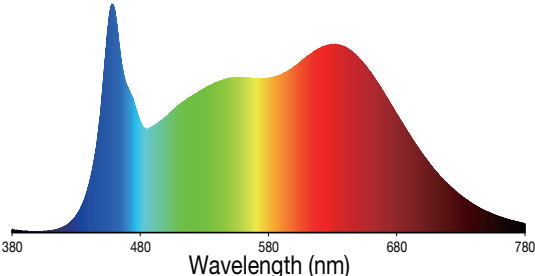
| CCT | COLOR ACCURACY | SPECTRAL POWER DISTRIBUTION |
|-------|---|---|
| 2700K |  <p>Rr: 95, Rg: 100</p> |  <p>Wavelength (nm)</p> |
| 3000K |  <p>Rr: 94, Rg: 99</p> |  <p>Wavelength (nm)</p> |
| 4000K |  <p>Rr: 90, Rg: 97</p> |  <p>Wavelength (nm)</p> |

Rf: TM-30 metric measuring color fidelity (whether colors are similar to those under natural light). Rf is a more accurate version of the CRI Ra. Rf is 100 for natural light.

Rg: TM-30 metric measuring color gamut (whether colors are more saturated than under natural light). Rg is 100 for natural light.



REFINE PAR FAMILY

ORDERING INFORMATION

| Model | Master Carton | | | Shipping Carton | | |
|--------------------------|---------------|-------------------------------|-------------|-----------------|--------------------------------|-------------|
| | Case Qty | Case Dimensions (LxWxH) | Case Weight | Case Qty | Case Dimensions (LxWxH) | Case Weight |
| 6.5PAR20DIM/xxxxyy | 6 | 8-3/16" x 5-1/2" x 3-15/16" | 1.54lb | 24 | 11-7/16" x 8-3/4" x 8-7/8" | 6.83lb |
| 6.5PAR20DIM/930FL40/B | 6 | 8-3/16" x 5-1/2" x 3-15/16" | 1.54lb | 24 | 11-7/16" x 8-3/4" x 8-7/8" | 6.83lb |
| 11PAR30DIM/927SP15 | 6 | 11-15/16" x 8-1/8" x 5-3/8" | 2.65lb | 24 | 16-7/16" x 12-1/4" x 11-13/16" | 12.35lb |
| 11PAR30DIM/930FL40/B | 6 | 11-15/16" x 8-1/8" x 5-3/8" | 2.65lb | 24 | 16-7/16" x 12-1/4" x 11-13/16" | 12.35lb |
| 11PAR30SDIM/927SP15 | 6 | 11-15/16" x 8-1/8" x 5-3/8" | 1.98lb | 24 | 16-3/8" x 12-1/2" x 9-11/16" | 11.46lb |
| 11PAR30SDIM/930FL40/B | 6 | 11-15/16" x 8-1/8" x 5-3/8" | 1.98lb | 24 | 16-3/8" x 12-1/2" x 9-11/16" | 11.46lb |
| 11PAR30/930FL40/277V | 6 | 11-15/16" x 8-1/8" x 5-3/8" | 2.65lb | 24 | 16-7/16" x 12-1/4" x 11-13/16" | 12.35lb |
| 15.5PAR38DIM/927SP15 | 6 | 14-15/16" x 10-1/16" x 6-1/4" | 4.41lb | 24 | 20-7/16" x 15-7/16" x 13-5/8" | 19.62lb |
| 15.5PAR38DIM/xxxxyy/B | 6 | 14-15/16" x 10-1/16" x 6-1/4" | 4.41lb | 24 | 20-7/16" x 15-7/16" x 13-5/8" | 19.62lb |
| 15.5PAR38DIM/xxxxyy/GU24 | 6 | 14-15/16" x 10-1/16" x 6-1/4" | 4.41lb | 24 | 20-7/16" x 15-7/16" x 13-5/8" | 19.62lb |
| 15.5PAR38/xxxxyy/277V | 6 | 14-15/16" x 10-1/16" x 6-1/4" | 4.41lb | 24 | 20-7/16" x 15-7/16" x 13-5/8" | 19.62lb |
| 11PAR30SDIM/xxxxyy/B | 6 | 11-15/16" x 8-1/8" x 9-3/8" | 1.98lb | 24 | 16-3/8" x 12-1/2" x 9-11/16" | 11.46lb |

Where xxx means 824-965 which indicates CRI and color temperature

Where yyyy means beam angle

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.