



# LED VINTAGE GLOBES

Add an elegant, timeless look to any room with the warm glow of these decorative LED vintage globe bulbs.

## FEATURES

- Energy efficient replacement for 25W or 40W incandescent lamps
- Clear glass lens shows off unique vertical filaments
- Frosted glass lens diffuses light output and reduces glare
- Candelabra (E12) or standard household medium (E26) base
- Dimmable; see Dimmer Compatibility section for a full list of dimmers

## LISTINGS

- UL Listed for wet locations
- FCC
- RoHS
- DOE
- Rated for use in enclosed fixtures

## WARRANTY

- 1-year limited warranty; see [pltsolutions.com](http://pltsolutions.com) for warranty details

## APPLICATIONS

- Pendant Fixtures
- Ceiling Fans
- Wall Sconces
- Decorative Fixtures

project name	type
catalog number	
comments	voltage
approved by	date



PERFORMANCE	Power Consumption	3, 3.5, 4, 5 Watt
	Lumens	250, 350, 450
	Efficacy (LPW)	83, 88, 90, 100
	CRI	90
	CCT	2400K
ELECTRICAL	LED L70 Life Hours	15,000
	Input Voltage	120V
	Shape	G40
	Filament Type	Vertical
	Base	E12, E26
CONSTRUCTION	Finish	Clear
	Certifications	UL Listed; FCC; DOE
	Material Usage	RoHS – No mercury or lead
LISTINGS	Environment	Wet Location Rated; Enclosed Fixture Rated


## PERFORMANCE SUMMARY

Item #	Shape	Lumens	Wattage	LPW	Voltage	Replaces	CCT	CRI	Finish	Base	LED L70 Life Hours	Dimmable
PLT-12822	G16.5	250	3	83	120V	25W Incan.	2400K	92	Clear	E12	15,000	Yes
PLT-12823	G16.5	250	3	83	120V	25W Incan.	2400K	92	Frosted	E12	15,000	Yes
PLT-12824	G16.5	250	3	83	120V	25W Incan.	2400K	92	Clear	E26	15,000	Yes
PLT-12825	G16.5	250	3	83	120V	25W Incan.	2400K	92	Frosted	E26	15,000	Yes
PLT-12826	G16.5	350	3.5	100	120V	40W Incan.	2400K	92	Clear	E12	15,000	Yes
PLT-12827	G16.5	350	3.5	100	120V	40W Incan.	2400K	92	Frosted	E12	15,000	Yes
PLT-12828	G16.5	350	3.5	100	120V	40W Incan.	2400K	92	Clear	E26	15,000	Yes
PLT-12829	G16.5	350	3.5	100	120V	40W Incan.	2400K	92	Frosted	E26	15,000	Yes
PLT-12830	G25	350	3.5	100	120V	40W Incan.	2400K	92	Clear	E26	15,000	Yes
PLT-12831	G25	350	4	88	120V	40W Incan.	2400K	92	Frosted	E26	15,000	Yes
PLT-12832	G40	450	5	90	120V	40W Incan.	2400K	92	Clear	E26	15,000	Yes
PLT-12833	G40	450	5	90	120V	40W Incan.	2400K	92	White	E26	15,000	Yes

## COMPATIBLE DIMMERS

Dimmer Model#	Result
LUTRON MACL-153M-WH	OK
LUTRON DVCL-153P-WH	OK
LUTRON PD-6WCL-WH-P	OK
OLEGRAND RHCL453PW	OK
LEVITON WHITE NO.6674 600W	OK
LEVITON LIGH ALMOND NO.6672 600W	OK
LUTRON MACL-153MH-WH	OK
LUTRON TGCL-153P-WH	OK
LUTRON DVCL-153PR-WH	OK
LUTRON CTCL-153PDH-WH	OK
EATON SAL06P3	OK
Wemo - F7C059	OK
LUTRON P-PKG1W-WH	OK
LEVITON DSL06-001-1LZ	OK
LEVITON IPL06-011-10Z	OK
LEVITON RDL06-001-10Z	OK
LEVITON DSE06-001-10Z	OK
LEVITON DDMX1-011-BLZ	OK
LEVITON SLIDE DIMMER SURESLIDE	OK
LUTRON DIVA DVELV-300P-WH	OK
LUTRON SKYLARK SLV-600P-WH	OK
LUTRON RADIORA2 RRD-6CL-WH	OK
WATTSTOPPER MICO DETECTOR DCD267-W	OK
LEVITON SLIDE DIMMER	OK
LEVITON SLIDE DIMMER 3WAY	OK
LUTRON CASEFA WIRELESS	OK
LUTRON DIVA CL	OK
SMART DIMMER MASTER 300W	OK
LEVITON SLIDE NO.IPL06 R50-IPL06-10M	OK
GEN 2.0 DC CONTROL 120VAC 60Hz	OK


## DIMENSIONS



### **G16.5 BULB w/ E12 BASE**

Height – 3.07"


Diameter – 1.97"



### **G16.5 BULB w/ E26 BASE**

Height – 2.87"

Diameter – 1.97"

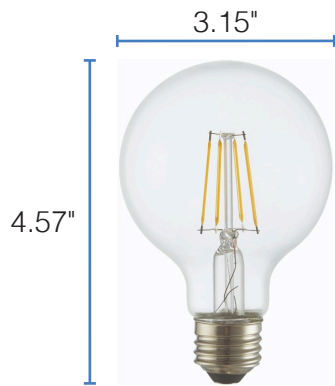

### **G25 BULB**

Height – 4.57"

Diameter – 3.15"



### **G40 BULB**

Height – 6.50"

Diameter – 4.92"

## WARNINGS

- Only use this LED globe with the dimmers listed in the compatibility list. Using this bulb with incompatible dimmers may cause performance issues including humming, buzzing, flickering, and poor dimming performance.