



# LED VINTAGE GLOBES

Add an elegant, timeless look to any room with the warm glow of these decorative LED vintage globe bulbs.

## FEATURES

- Energy efficient replacement for 25W or 40W incandescent lamps
- Clear glass lens shows off unique vertical filaments
- Frosted glass lens diffuses light output and reduces glare
- Candelabra (E12) or standard household medium (E26) base
- Dimmable; see Dimmer Compatibility section for a full list of dimmers

## LISTINGS

- UL Listed for wet locations
- FCC
- RoHS
- DOE
- Rated for use in enclosed fixtures

## WARRANTY

- 1-year limited warranty; see [pltsolutions.com](http://pltsolutions.com) for warranty details

## APPLICATIONS

- Pendant Fixtures
- Ceiling Fans
- Wall Sconces
- Decorative Fixtures

project name	type
catalog number	
comments	voltage
approved by	date



PERFORMANCE	Power Consumption	3, 3.5, 4, 5 Watt
	Lumens	250, 350, 450
	Efficacy (LPW)	83, 88, 90, 100
	CRI	90
	CCT	2400K
	LED L70 Life Hours	15,000
ELECTRICAL	Input Voltage	120V
	Shape	G40
CONSTRUCTION	Filament Type	Vertical
	Base	E12, E26
	Finish	Clear
	Certifications	UL Listed; FCC; DOE
LISTINGS	Material Usage	RoHS – No mercury or lead
	Environment	Wet Location Rated; Enclosed Fixture Rated


## PERFORMANCE SUMMARY

Item #	Shape	Lumens	Wattage	LPW	Voltage	Replaces	CCT	CRI	Finish	Base	LED L70 Life Hours	Dimmable
PLT-12822	G16.5	250	3	83	120V	25W Incan.	2400K	92	Clear	E12	15,000	Yes
PLT-12823	G16.5	250	3	83	120V	25W Incan.	2400K	92	Frosted	E12	15,000	Yes
PLT-12824	G16.5	250	3	83	120V	25W Incan.	2400K	92	Clear	E26	15,000	Yes
PLT-12825	G16.5	250	3	83	120V	25W Incan.	2400K	92	Frosted	E26	15,000	Yes
PLT-12826	G16.5	350	3.5	100	120V	40W Incan.	2400K	92	Clear	E12	15,000	Yes
PLT-12827	G16.5	350	3.5	100	120V	40W Incan.	2400K	92	Frosted	E12	15,000	Yes
PLT-12828	G16.5	350	3.5	100	120V	40W Incan.	2400K	92	Clear	E26	15,000	Yes
PLT-12829	G16.5	350	3.5	100	120V	40W Incan.	2400K	92	Frosted	E26	15,000	Yes
PLT-12830	G25	350	3.5	100	120V	40W Incan.	2400K	92	Clear	E26	15,000	Yes
PLT-12831	G25	350	4	88	120V	40W Incan.	2400K	92	Frosted	E26	15,000	Yes
PLT-12832	G40	450	5	90	120V	40W Incan.	2400K	92	Clear	E26	15,000	Yes
PLT-12833	G40	450	5	90	120V	40W Incan.	2400K	92	White	E26	15,000	Yes

## COMPATIBLE DIMMERS

Brand	Model	Compatible
LUTRON	PD-6WCL-WH-P	OK
LEGRAND	RHCL453PW	OK
LUTRON	DVCL-153PR-X	OK
LUTRON	CTCL-153PDH-X	OK
LEVITON	IPL06 R50-IPL06-10M	OK
LUTRON	DVELV-300P-X	OK
LUTRON	NLV-1000-X	X
LUTRON	SLV-600P-X	OK
LUTRON	RRD-6CL-X	OK
WATTSTOPPER	DCD267-W	OK
LEVITON	DW6HD-1BZ	X
LUTRON	P-PKG1W-WH	OK
LEVITON	DSL06-001-1LZ	OK
LEVITON	IPL06-011-10Z	OK
LEVITON	06674-002-10W	X
LEVITON	RDL06-001-10Z	OK
LEVITON	DSE06-001-10Z	OK
LEVITON	DDMX1-011-BLZ	OK
EATON	SAL06P3	OK
LEVITON	6672	OK
LEVITON	IPL06	X
LEVITON	6674	OK
LUTRON	MACL-153M-X	OK
LUTRON	MACL-153MH-X	OK
LUTRON	TGCL-153P-X	OK
LUTRON	DVCL-153P-X	OK


## DIMENSIONS



### **G16.5 BULB w/ E12 BASE**

Height – 3.07"


Diameter – 1.97"



### **G16.5 BULB w/ E26 BASE**

Height – 2.87"

Diameter – 1.97"

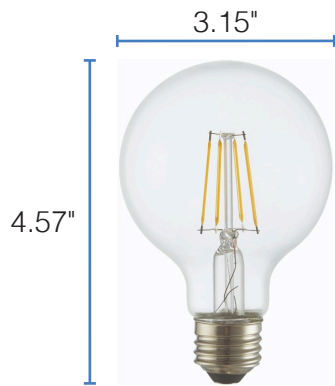

### **G25 BULB**

Height – 4.57"

Diameter – 3.15"



### **G40 BULB**

Height – 6.50"

Diameter – 4.92"

## WARNINGS

- Only use this LED globe with the dimmers listed in the compatibility list. Using this bulb with incompatible dimmers may cause performance issues including humming, buzzing, flickering, and poor dimming performance.