

DESCRIPTION

Featuring two adjustable LED lamp heads and durable thermoplastic housing, use these red LED combination exit signs to provide light during a power outage or emergency.

FEATURES

- Single or double face sign with 6-inch red letters
- Two rectangular fully-adjustable LED lamp heads use 0.5W each
- Emergency operation for up to 90 minutes; recharges in 24 hours
- Built in 3.6V Ni-MH battery
- Has manual test switch and charge indicator
- Universal J-box mounting pattern for easy installation
- Can be ceiling or wall mounted; see installation instructions for more information

LISTINGS

- UL rated for damp locations
- UL 94V-0 flame rating
- RoHS

PERFORMANCE

- Lamp Head Wattage: 0.5W
- Emergency Operation: 90 minutes
- Charging Time: 24 Hours

THERMAL

- 32°F to 104°F (0°C to 40°C) operating temperature

ELECTRICAL

- Input Voltage: 120V-277V
- Input Current: 60mA
- Input Wattage: 3.3W

BATTERY

- Type: Ni-MH
- Voltage: 3.6V
- Milliamp Hours: 1000 mAh

INSTALLATION

- Designed for ceiling or wall mounting (hardware included); see Installation Instruction PDF for more information

CONSTRUCTION

- Injection-molded thermoplastic ABS housing with white finish

project name	type
catalog number	
comments	voltage
approved by	date



WARRANTY

- 5 year limited warranty; see pltsolutions.com for warranty details


APPLICATIONS

- Hallways
- Stairwells
- Lobbies

PERFORMANCE SUMMARY

Item #	Input Wattage	Input Current	Lamp Head Wattage	Voltage	Battery Type	Emergency Operation	Recharge Time	Testing	Letter Color
PLTS-50291	3.3W	60mA	0.5W (each)	120V-277V	Ni-MH	90 Minutes	24 Hours	Manual	Red

DIMENSIONS

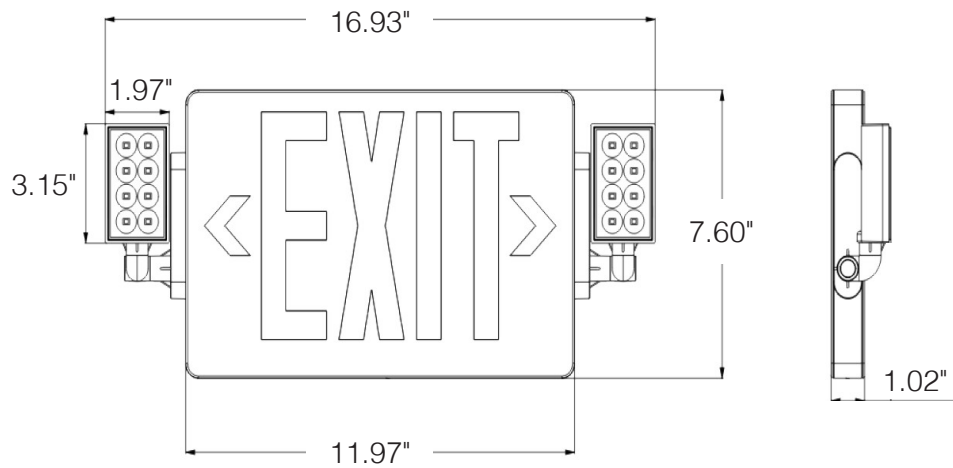

DIMENSIONS

Height: 7.60"
Width: 11.97"
Width (with lamp heads): 16.93"
Depth: 1.02"
Weight: 2.31 lbs.

LAMP HEADS

Height: 3.15"
Width: 1.97"

WARNINGS

- Not for use outdoors.