



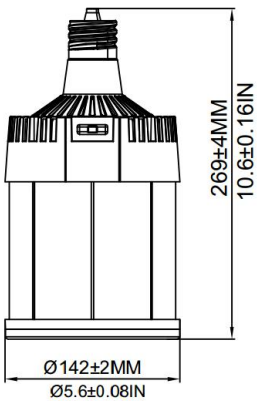



PLT-12959 - 100/150/200W, 3000/4000/5000K,
E39 Base, 277-480V

DIMENSIONS

EX39



E39

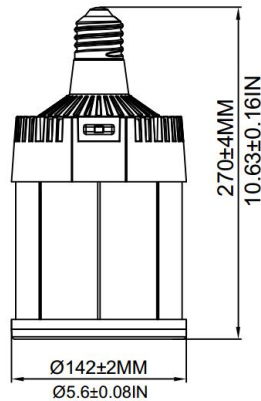

NPS-00085*

*Special Order, call 1-800-624-4488

NOTICE FOR USER

- Please turn off power before installation or maintenance.
- The input voltage of the fixture and lamps should match.
- Installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.
- Suitable for damp locations. Do not use with dimmers.
- Make sure to remove or bypass the ballast in the fixture before installing the lamp.
- Suitable for use in enclosed luminaires, min. Luminaire compartment dimensions: 470*320*320MM.

ADVANTAGE

- UL cUL certificate.
- E39 EX39 lamp base.
- Lumileds Chip, high CRI.
- Internal driver, input voltage 277-480VAC.
- Meet 4kV surge immunity level.
- Long lifespan and good heat dissipation ,With Sunon fan
- Two dimming options are available, continuous dimming or segmented dimmer
- Fits many different fixtures to replace traditional lamps.

APPLICATION

- Replacement Lamps for Outdoor
- Pole/Arm-mounted Decorative Luminaires(Type B)


SPECIFICATIONS

OPTICAL	Input Power (Tolerance : ±10%)	200W (100W/150W/200W via switch)		
	Color Temperature (Color Tunable)	3000K	4000K	5000K
	Lumen (Tolerance : ±10%)	29500 LM	31850 LM	31600LM
	Efficacy (Tolerance : ±3%)	150LM/W	168 LM/W	162 LM/W
	CRI	>80		
	Color Consistency	<7 Steps (or <7 SDCM)		
	Diffuser Type	Clear PC		
	Beam Angle (50%) (Tolerance : ±25%)	280 Degree		
ELECTRICAL	Input Voltage and Frequency	277-487VAC, 50/60Hz		
	PF (Tolerance : -3%)	≥0.9		
	THD (Tolerance : +5%)	≤20%		
	Flicker Percent	<30%		
	Driver Surge protection	L-N: 4kV		
	Dimmable	0-10V dimming standard (through manual knob on the lamp)		
	Equivalent	600W MHL/HPS/HID		
MATERIALS	LED Brand	Lumileds		
	LED Type	SMD2835		
	LED QTY	455 pcs of 3000K + 455 pcs of 5000K		
	Housing	PC + Aluminum		
	Housing Color	Any colors		
	Waterproof Rating	DAMP		
OTHERS	Operating Temperature	-40°C TO 50°C		
	Storage Temperature	-40°C TO 80°C		
	Operating Humidity	20% - 70% RH		
	Storage Humidity	10% - 75% RH		
	Warranty	5 years		

PACKAGE

	Carton Size	Qty / Carton	Net Weight / Carton	Gross Weight / Carton
Inner Carton	150*150*315 MM/5.9*5.9*12.4IN	1 PC	1.3KG/2.87lb	1.55KG/3.42lb
Outer Carton	470*320*330 MM/18.5*12.6*13IN	6 PCS	7.8KG/17.2lb	11KG/24.25lb

Tolerance of Outer Carton Size: ±5 MM/±0.59IN, Tolerance of Weight: ±10%.

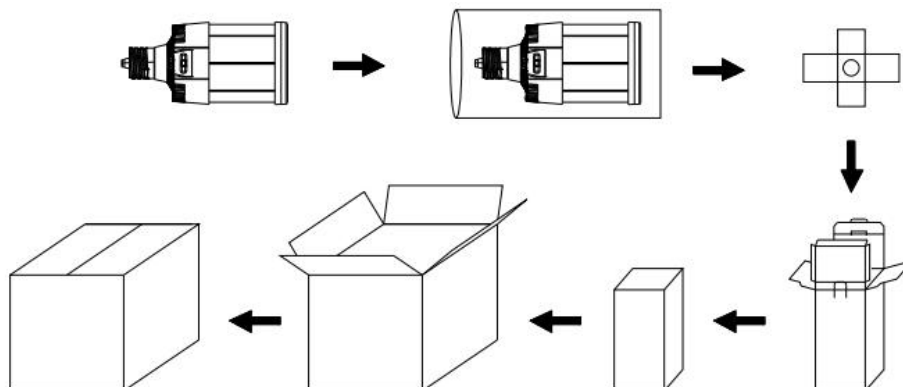

LIGHT DISTRIBUTION TESTING PARAMETERS

Remark: The testing data comes directly from the product test.

Luminaire Property

Luminaire Manufacturer:

Voltage: 278.0 V

Power: 195.19 W

Current: 0.756 A

Power Factor: 0.929

Photometric Results

IES Classification: Type I

Total Rated Lamp Lumens: 31626.1 lm

Efficiency: 100%

Upward Ratio: 47%

Central Intensity: 999.93 cd

Pos of Max. Intensity: H45 V86

Longitudinal Classification: Very Long


Measurement Flux: 31626.1 lm

Downward Ratio: 53%


Luminaire Efficacy Rating (LER): 162.08

Max. Intensity: 3273.22 cd

Luminous Intensity Distribution Curve

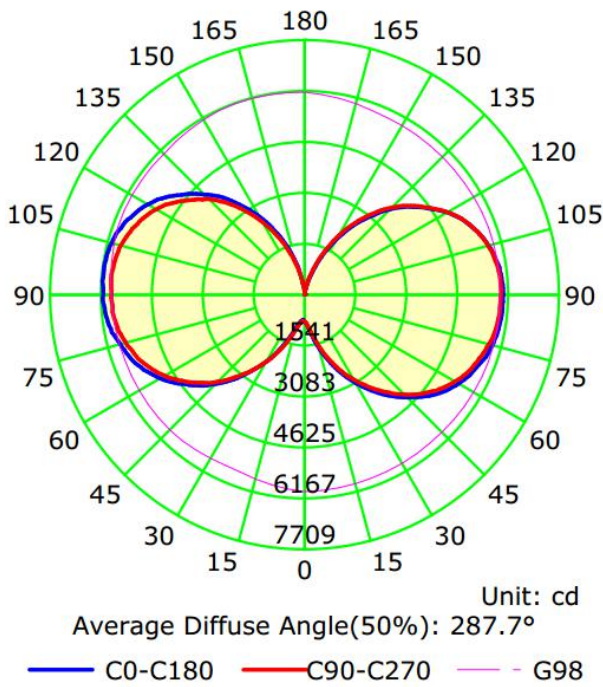

The Average Illuminance Effective Figure

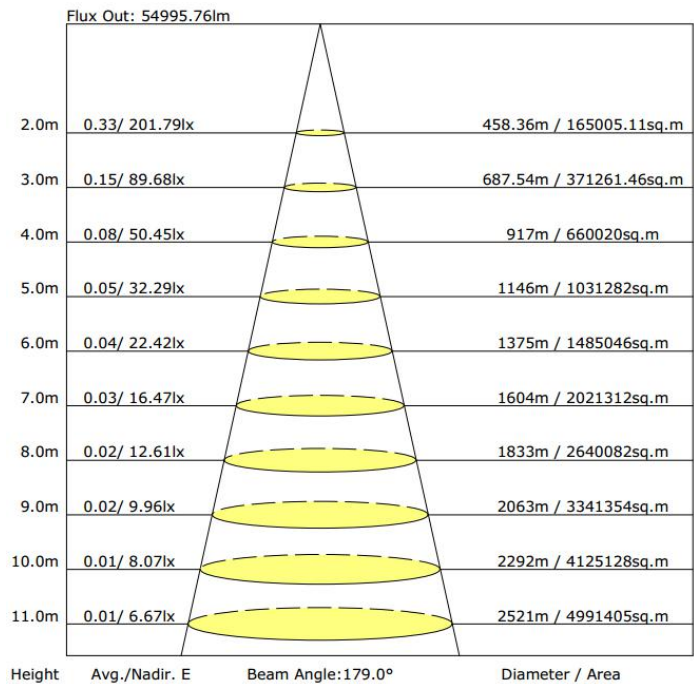

TROUBLESHOOTING

Problem	Solution
Flickering light	Turn off the power, then turn on again after 3 minutes. If the light continues to flicker, call a licensed electrician.
Light is not coming on	Check the electrical connection.