




# 8" Square LED Slim Downlight

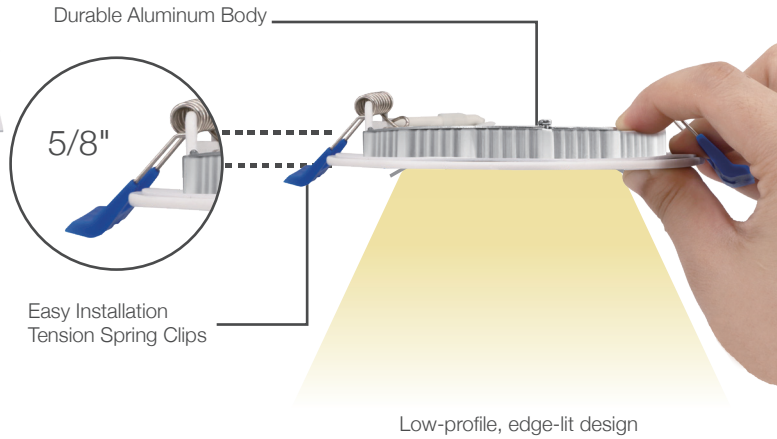


## Features


- Edge-lit technology, no glare or dark spots, instant-on
- No existing recessed housing or junction box required
- Dimming: TRIAC down to 10%
- I.C. rated for direct contact with insulation
- Suitable for WET LOCATION
- Rated for a long life - over 50,000 hours
- 5-color field selectable CCT - 2700K, 3000K, 3500K, 4000K, 5000K



## DIMENSIONS

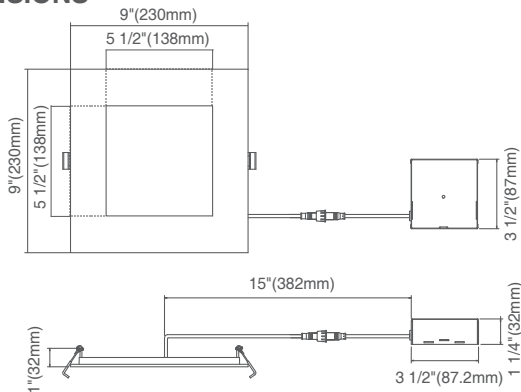

## INSTALLATION

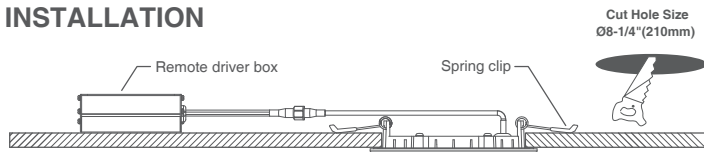

## Accessories

### Extension Cables



**NPS-00116\*\***  
4ft flexible connector, for use with Gimbal/ s lim LED fixtures



**NPS-00117\*\***  
6ft flexible connector, for use with Gimbal/ s lim LED fixtures



**NPS-00118\*\***  
10ft flexible connector, for use with Gimbal/ slim LED fixtures



**NPS-00119\*\***  
20ft flexible connector, for use with Gimbal/ slim LED fixtures

### Decorative Trim



Square Deep Bronze  
NPS-00139\*\*



Square Brushed Nickel  
NPS-00140\*\*



Square Black  
NPS-00141\*\*




Square Copper  
NPS-00142\*\*

### Goof Ring



**PLT-12715**  
8" Goof Ring Inside Diameter - 8 1/4" (210mm)  
Outside Diameter - 10 1/2" (254mm) Thickness - 1mm for use with Gimbal/Slim LED fixtures

### Mounting



**NPS-00138\*\***  
8" new construction pre-mounting plate Opening Ø8 1/4" (210mm)

## SPECIFICATIONS

Model	PLT-12992
Watts	22W
Size	8in
Default Driver Input	AC120V,60HZ
Light Output(lm)	1300lm***
Color Temperature(K)	5-color field selectable CCT - 2700K, 3000K, 3500K, 4000K, 5000K
CRI	90Ra (80Ra Optional*)
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
Operating Temp.	(-4°F~-104°F) -20~40°C
Beam Angle	120°

## PACKAGE

Weight.(g)	667g
Qty/CTN (pcs)	18pcs/CTN
Box Dimension	645*545*265mm
Gross Weight	14.2kg/CTN

\*80 CRI version - NPS-00136 Special Order item, call 1-800-624-4488.

\*\*Special Order items. Call 1-800-624-4488.

\*\*\*See Selectable Table on page 2 for full breakdown.



**SELECTABLE TABLE**

<b>Wattage</b>	<b>CCT</b>	<b>Lumens</b>	<b>LPW</b>
22W	2700K	1157	53
	3000K	1248	57
	3500K	1307	59
	4000K	1311	60
	5000K	1251	57