



4" LED FIRE RATED RECESSED DOWNLIGHT




2 HOUR FIRE RATING
Tested to comply with UL 263,
ASTM E119 & CAN ULC S101

FEATURES

- 2-Hour fire rating providing a reinforced and heat resistant steel casing
- Selectable color temperature: 27K, 3K, 35K, 4K & 5K
- Junction box with commercial grade driver included
- Triac Dimmable, Certified airtight, IC rated
- Easy installation - NO ADDITIONAL BOX REQUIRED



DIMENSION

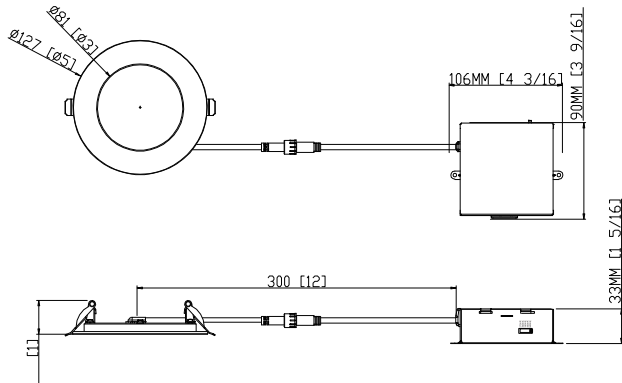

INSTALLATION



Accessories

Extension Cables



NPS-00116**
4ft flexible connector, for use with Gimbal/ slim LED fixtures



NPS-00118**
10ft flexible connector, for use with Gimbal/ slim LED fixtures




NPS-00117**
6ft flexible connector, for use with Gimbal/ slim LED fixtures



NPS-00119**
20ft flexible connector, for use with Gimbal/ slim LED fixtures

Decorative Trim Ring

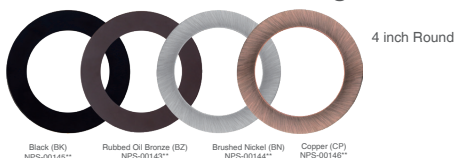

Black (BK) NPS-00145**
Rubbed Oil Bronze (BZ) NPS-00147**
Brushed Nickel (BN) NPS-00144**
Copper (CP) NPS-00146**

Goof Ring




PLT-12713
4" Goof Ring
Inside Diameter - 4 3/16" (106.8mm)
Outside Diameter - 5 3/4" (146mm)
Thickness - 1mm
for use with Gimbal/ slim LED fixtures


Mounting Plate



NPS-00124**
4" new construction pre-mounting plate Opening Ø4 1/4"(108mm)



NPS-00123**
4" new construction pre-mounting plate with collar for use with screw down "C" style Opening Ø4 3/8"(110mm)



PLT-12987
3 7/8" new construction pre-mounting plate opening Ø3"(75mm), Ø4-3/8"(110mm), Ø6-1/4"(160mm)

SPECIFICATIONS

Model	PLT-12993
Watts	12W
Light Output(lm)	883lm***
Size	4in
Default Driver Input	AC120V,60HZ
Color Temperature(K)	5-color field selectable CCT - 2700K, 3000K, 3500K, 4000K, 5000K
CRI	90Ra (80Ra Optional*)
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	120°

PACKAGE

Weight.(g)	332g
Qty/CTN (pcs)	18pcs/CTN
Box Dimension	L440*W285*H220mm
Gross Weight	7.58kg/CTN

*80 CRI version - NPS-00147 Special Order item, call 1-800-624-4488.

**Special Order items. Call 1-800-624-4488.

***See Selectable Table on page 2 for full breakdown.



4" LED FIRE RATED RECESSED DOWNLIGHT

SELECTABLE TABLE

Wattage	CCT	Lumens	LPW
12W	2700K	785	65
	3000K	844	70
	3500K	883	74
	4000K	881	73
	5000K	856	71