



PLT-12716 PRODUCT SPECIFICATIONS

4" LED ROUND FIRE RATED ULTRA-THIN DOWNLIGHT WITH BAFFLE



2 HOUR FIRE RATING
Tested to comply with UL 263, ASTM E119 & CAN ULC S101




FEATURES


- 2-Hour fire rating providing a reinforced and heat resistant steel casing
- Selectable color temperature: 27K, 3K, 35K, 4K & 5K
- Junction box with commercial grade driver included
- Triac Dimmable, Certified airtight, IC rated
- Easy installation - NO ADDITIONAL BOX REQUIRED



DIMENSION

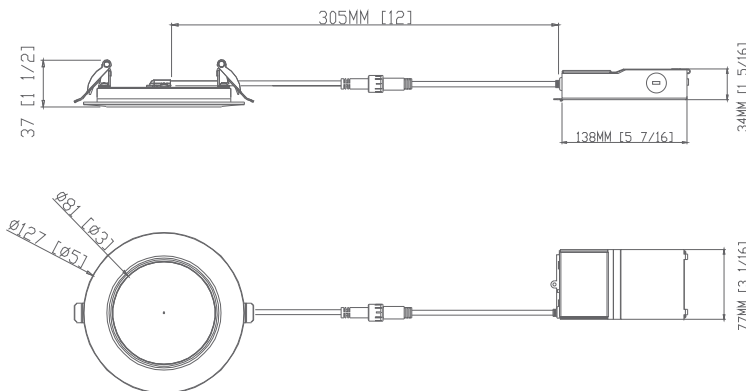

INSTALLATION

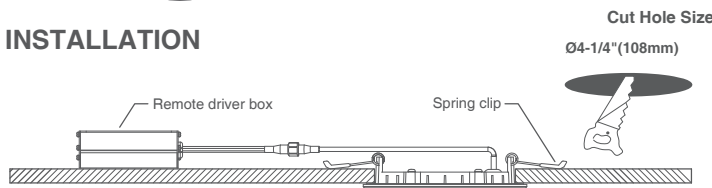

Accessories

Extension Cables



NPS-00116**
4ft flexible connector, for use with Gimbal/ slim LED fixtures



NPS-00118**
10ft flexible connector, for use with Gimbal/ slim LED fixtures



NPS-00117**
6ft flexible connector, for use with Gimbal/ slim LED fixtures



NPS-00119**
20ft flexible connector, for use with Gimbal/ slim LED fixtures

Goof Ring




PLT-12713
4" Goof Ring
Inside Diameter - 4.33"
Outside Diameter - 5.75"
Thickness - 1mm
For use with Gimbal/slim LED fixtures


Mounting Plate



NPS-00124**
4" new construction pre-mounting plate Opening Ø4 1/4"(108mm)



NPS-00123**
4" new construction pre-mounting plate with collar for use with screw down "C" style Opening Ø4 3/8"(110mm)



PLT-12987
The MP-UNV-346 is a 3 7/8" x 6" new construction pre-mounting plate opening Ø3"(75mm), Ø4-3/8"(110mm), Ø6-1/4"(160mm)

SPECIFICATIONS	
Model	PLT-12716
Watts	12W
Light Output(lm)	800lm
Size	4in
Default Driver Input	AC120V,60HZ
Color Temperature(K)	5-color field selectable CCT ** - 2700K, 3000K, 3500K, 4000K, 5000K
CRI	90Ra (80Ra Optional*)
Dimming	Triac Dimming(100%-10%)
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	120°

PACKAGE

Weight.(g)	332g
Qty/CTN (pcs)	18pcs/CTN
Box Dimension	440*280*230mm
Gross Weight	7.58kg/CTN

* 80 CRI Version - NPS-00167 Special Order. Call 1-800-624-4488

**Available via Special Order. Call 1-800-624-4488

*** See Selectable Table for full Lumen/LPW breakdown.



PLT-12716 PRODUCT SPECIFICATIONS

4" LED ROUND FIRE RATED ULTRA-THIN DOWNLIGHT WITH BAFFLE

Selectable Table

Wattage	CCT	Lumens	LPW
12	2700	736	61
	3000	779	65
	3500	816	68
	4000	822	69
	5000	799	67