



SLIM FULL CUT-OFF LED WALL PACK



► DESCRIPTION

LED FULL CUTOFF WALL PACK | 120-277VAC, 50-60HZ | 3000K-4000K-5000K Adjustable | IP65

► APPLICATION

WAREHOUSES | OFFICES | FACTORIES | HOPITALS | HOTELS

► PRODUCT FEATURES

- Low-profile, stylish design with durable powder coat finish
- Powered by 0-10V dimming LED drivers
- Ambient operating temperature: -40C/-40F to 45C/113F
- UL listed for wet locations, IP65
- 3CCT & Power Adjustable Option(100%-80%-60%)
- 4KV surge protection
- Power Factor: >0.9
- THD: <20%
- LED L70 Life Hours: 50,000 hours
- 5 year warranty



SLIM FULL CUT-OFF LED WALL PACK

SPECIFICATIONS

Model#	Watt	Lumens* @5000K	Chips	LPW*	CCT	CRI	PF	Input Volt.	Dimming	SPD	Working Temp.	IP Rating	Equivalent
PLT-13009	60W 48W 36W	8160/ 7252/ 5698	Lumileds 2835	158LPW	3K/4K/5K CCT Adjustable	>80	>0.9	AC120-277V	0-10V	4KV	(-40°C~45°C) (-40°C~45°C)	IP65	250W MH
PLT-13011	120W 96W 72W	15,500/ 12,400/ 9,600	Lumileds 2835	133LPW	3K/4K/5K CCT Adjustable	>80	>0.9	AC120-277V	0-10V	4KV	(-40°C~45°C) (-40°C~45°C)	IP65	400W MH

*See Selectable Table for full breakdown.

SELECTABLE TABLE


SKU	Wattage	CCT	Lumens	LPW	SKU	Wattage	CCT	Lumens	LPW
PLT-13009	36W	3000K	5,348	148	PLT-13011	72W	3000K	9,300	129
		4000K	5,703	158			4000K	9,600	133
		5000K	5,698	158			5000K	9,600	133
	48W	3000K	6,803	141		96W	3000K	12,050	125
		4000K	7,325	152			4000K	12,450	129
		5000K	7,252	152			5000K	12,400	129
	60W	3000K	7,645	127		120W	3000K	15,050	125
		4000K	8,310	138			4000K	15,450	128
		5000K	8,160	138			5000K	15,500	129

DIMENSIONS

Weight:

PLT-13009 - 5.51 lbs

PLT-13011 - 5.84 lbs

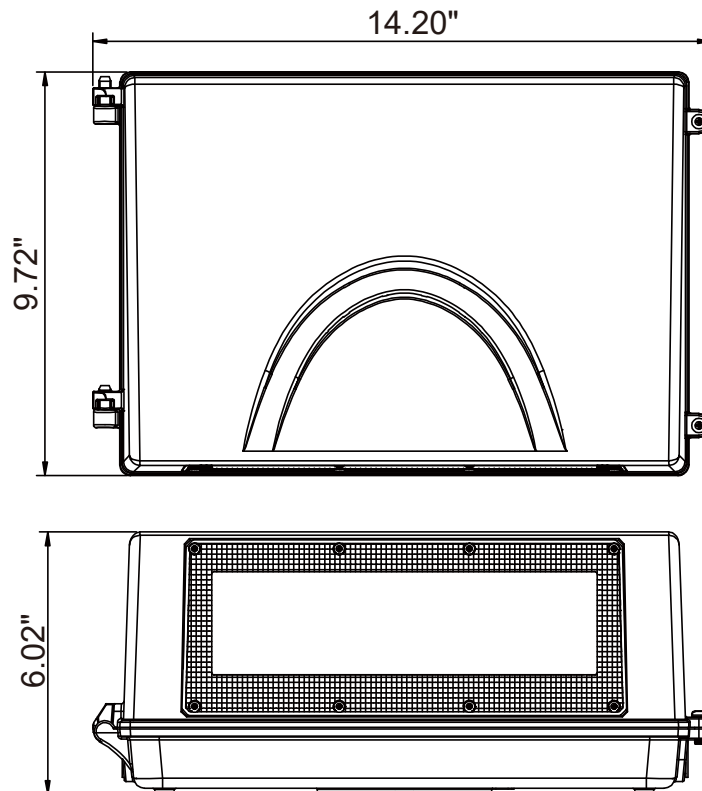

60W/120W