

T5 LED Tube (Type B)

For: Replacement for 4' T5 fluorescent lamps.




FEATURES AND BENEFITS

- 4CCT Selectable
- LED driver built-in
- Single/double-ended direct AC120-277V input
- Lifespan: 50,000hrs
- Warranty: 5 years
- Color tunable: The CCT can be adjusted via the switch, switch to the left is 3500K/4000K/5000K/6500K

PRODUCT SPECIFICATIONS

Body	Glass with powder painting
End cap	G5
Lens	Frosted
Input Voltage	120-277Vac,50/60hz
Power Factor	>0.9
CCT	3500K-4000K-5000K-6500K
CRI	Ra83
Dimming	Dimmable (0-10V dimming system support)
Lifetime	50,000 Hours
Warranty	5 Years
Environmental Requirements	Operation Temp: -4~113 °F (-20°~45°C) Storage Temp: -4~140 °F (-20°~60°C) Relative Humidity: 45%-85% Non-corrosive environments
Size	L: 4ft: 45.24inch/ 1149mm

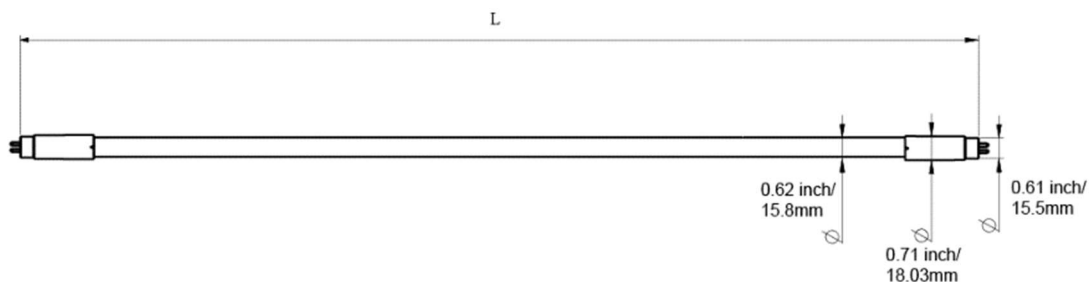


SPECIFICATION

Item No.	Power (Type B)	CCT	Lumen	CRI	Voltage (Type B)	Frequency (Type B)	PF	Beam Angle (Bare lamp)
PLT-60039	24W	3500K-4000K-5000K-6500K	3120lm	Ra83	AC120-277V	50/60Hz	0.9	180°Frosted


WIRING DIAGRAM:

Case 1: Direct AC wiring diagram without dimming


Double-ended power input




OR



Single-ended power input




OR



Voltage Input: AC120-277V 50/60Hz

Case 2: Direct AC wiring diagram with 0-10V dimming system

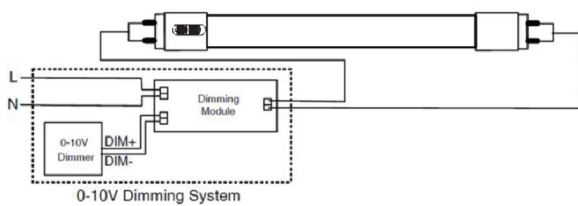

Voltage Input: AC120-277V 50/60Hz