




Selectable LED Panel Fixtures

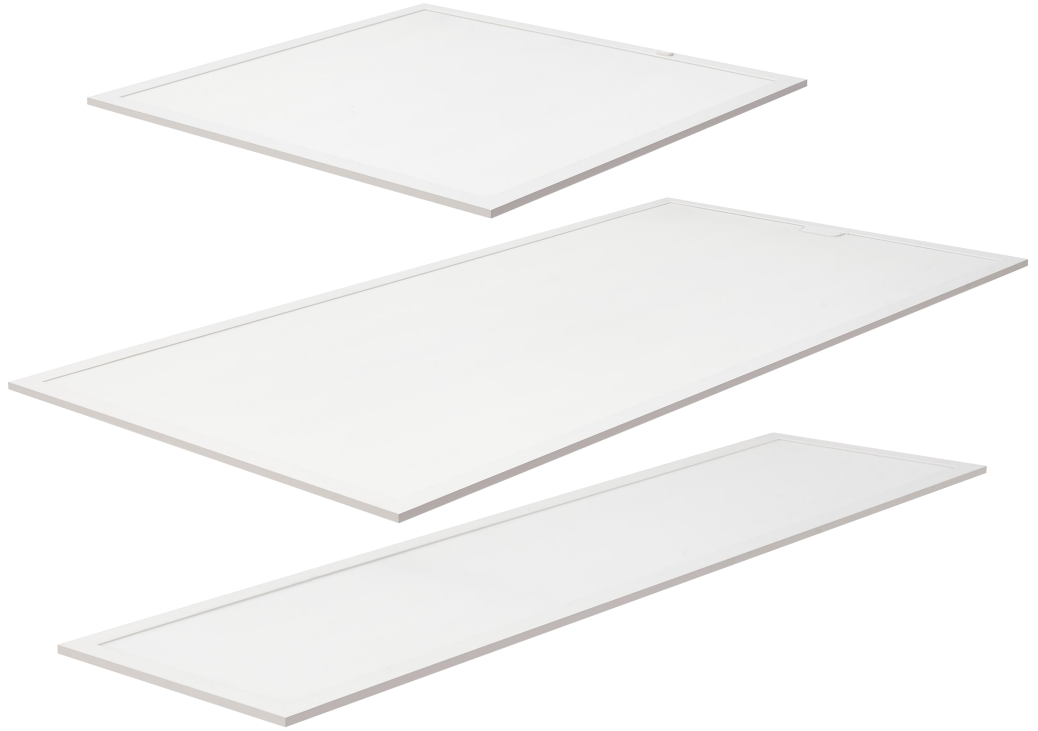

Top features

- 125 lm/W or 110 lm/W
- Power and/or CCT adjustable default
- Flicker free(≤ 10%)
- DC sensor and EM solution ready*

Multiple sensor solutions ready **

- Quick and easy in-field installation of sensors.**
- Integrated occupancy and daylight controls.**




There is a flexible cable with connector secured to the back of the bracket cover.



The sensor receptacle is pre-embedded in the profile frame.

**Optional accessories available via Special order. Please call 1-800-624-4488 for more information.*

***Fixtures with built-in sensors are available via Special Order. Please call 1-800-624-4488 for more information.*

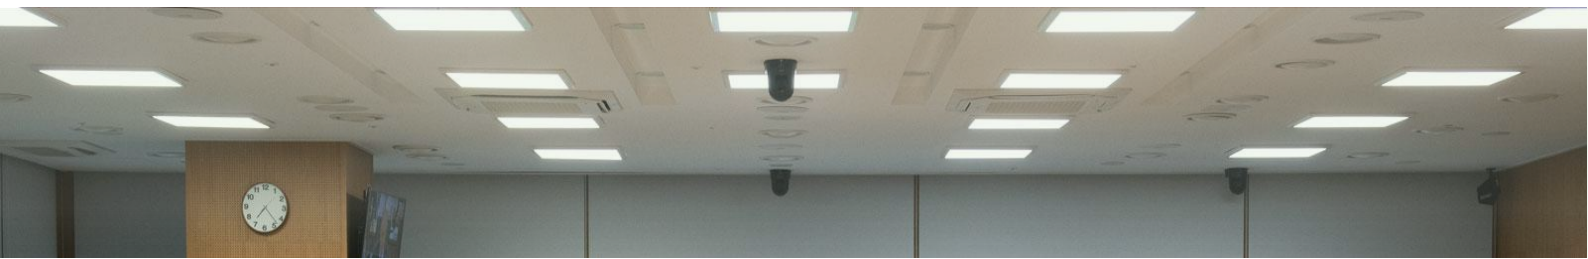

Specifications and accessories

UL Listing:

Suitable for damp locations.
DLC 5.1 Standard
IC rated

LEDs:

Long-life, high-efficacy, micro-power LEDs
80 CRI, 120-277V

Lifespan:

Lumen Maintenance, L70 > 100,000 hours based on
IES LM-80 results and TM-21 calculations

Housing:

Steel sheet and extruded aluminum

Lens:

Frosted Polystyrene

Finish:

Long lasting white with high durability

Ambient Operating Temperature:

-20°C (-4°F) to 50°C (122°F)

Driver:

Driver includes dimming control wiring for 0-10V dimming systems. The dim-to-off voltage threshold of optional 12V AUX* integrated driver ranges from 0.1V to 0.5V.

IESNA LM-79 & IESNA LM-80 Testing:

LED luminaires have been tested based on IESNA LM-79 and LM-80 by a third-party laboratory

Mounting:

Recessed ceiling mounting ready (default)
Surface mounting with optional accessories*
Suspended installation with optional accessories*


Optional accessories (purchased separately)*:

- Drywall mount kit
- Surface mount kit
- Cable suspending mounting kit


**Optional accessories available via Special order. Please call 1-800-624-4488 for more information.*

Dimensions

2x4

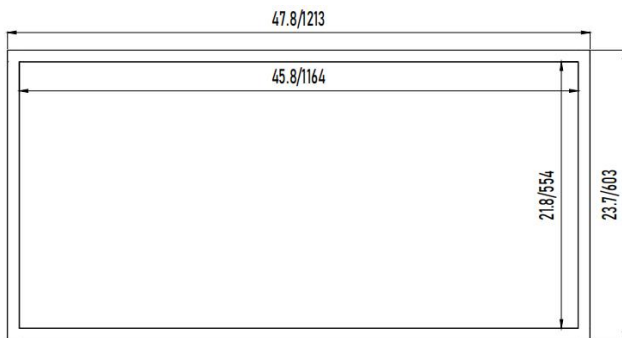


2x2

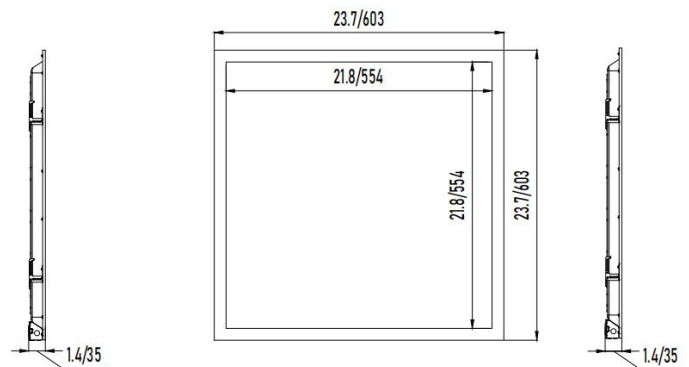

Size unit: inch/mm

1x4

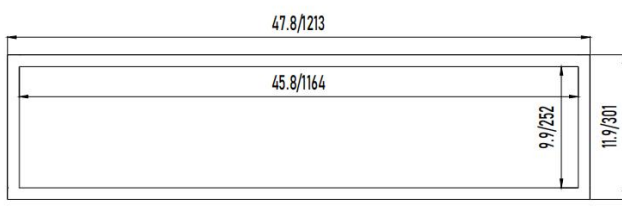

Performance

Product Series	SKU No.	Size	Input Wattage**	Lumens Rated**	LPW**	CCT	DLC #	DLC Level
Field-adjustable Power and CCT	NPS-00235*	1x4	40/30/25	5000/3750/3125	125	Selectable, 3500&4000&5000K	N/A	N/A
	NPS-00236*	2x2	30/25/20	3750/3125/2500	125	Selectable, 3500&4000&5000K	N/A	N/A
	NPS-00237*	2x2	40/30/25	5000/3750/3125	125	Selectable, 3500&4000&5000K	N/A	N/A
	NPS-00238*	2x4	40/30/25	5000/3750/3125	125	Selectable, 3500&4000&5000K	N/A	N/A
	NPS-00239*	2x4	50/40/30	6250/5000/3750	125	Selectable, 3500&4000&5000K	N/A	N/A
	NPS-00240*	2x4	60/50/40	7500/6250/5000	125	Selectable, 3500&4000&5000K	N/A	N/A
Field-adjustable Power, fixed CCT	NPS-00241*	1x4	40/30/25	5000/3750/3125	125	Fixed, 3500/4000/5000K	N/A	N/A
	NPS-00242*	2x2	30/25/20	3750/3125/2500	125	Fixed, 3500/4000/5000K	N/A	N/A
	NPS-00243*	2x2	40/30/25	5000/3750/3125	125	Fixed, 3500/4000/5000K	N/A	N/A
	NPS-00244*	2x4	40/30/25	5000/3750/3125	125	Fixed, 3500/4000/5000K	N/A	N/A
	NPS-00245*	2x4	50/40/30	6250/5000/3750	125	Fixed, 3500/4000/5000K	N/A	N/A
	NPS-00246*	2x4	60/50/40	7500/6250/5000	125	Fixed, 3500/4000/5000K	N/A	N/A
Field-adjustable Power and CCT	PLT-80020	1x4	40/30/25	4480/3450/2950	110	Selectable, 3500&4000&5000K	PLTM5C1111	5.1 Standard
	PLT-80021	2x2	40/30/25	4480/3450/2950	110	Selectable, 3500&4000&5000K	PLTM5C2111	5.1 Standard
	PLT-80022	2x4	50/40/30	6200/5300/3990	110	Selectable, 3500&4000&5000K	PLTM5C3211	5.1 Standard
	NPS-00247*	24	60/50/40	6600/5500/4400	110	Selectable, 3500&4000&5000K	N/A	N/A
Field-adjustable Power, fixed CCT	NPS-00248*	14	40/30/25	4400/3300/2750	110	Fixed, 3500/4000/5000K	N/A	N/A
	PLT-80023	2x2	40/30/25	4400/3300/2750	110	Fixed, 4000K	PLTM5C2114	5.1 Standard
	PLT-80024	2x2	40/30/25	4400/3300/2750	110	Fixed, 5000K	PLTM5C2115	5.1 Standard
	PLT-80025	2x4	50/40/30	5500/4400/3300	110	Fixed, 3500K	PLTM5C3213	5.1 Standard
	PLT-80026	2x4	50/40/30	5500/4400/3300	110	Fixed, 4000K	PLTM5C3214	5.1 Standard
	PLT-80027	2x4	50/40/30	5500/4400/3300	110	Fixed, 5000K	PLTM5C3215	5.1 Standard
	NPS-00249*	24	60/50/40	6600/5500/4400	110	Fixed, 3500/4000/5000K	N/A	N/A

*Please call 1-800-624-4488 for more information and ordering.

**See Selectable Tables for full breakdown.

Selectable Tables

SKU	Wattage	CCT	Lumens	LPW
PLT-80020	40	3500K	4400	110
		4000K	4480	112
		5000K	4440	111
	30	3500K	3390	113
		4000K	3450	115
		5000K	3420	114
	25	3500K	2900	116
		4000K	2950	118
		5000K	2925	117
PLT-80021	40	3500K	4400	110
		4000K	4480	112
		5000K	4440	111
	30	3500K	3390	113
		4000K	3450	115
		5000K	3420	114
	25	3500K	2900	116
		4000K	2950	118
		5000K	2925	117
PLT-80022	50	3500K	5975	120
		4000K	6200	124
		5000K	6100	122
	40	3500K	5000	125
		4000K	5300	133
		5000K	5100	128
	30	3500K	3800	127
		4000K	3990	133
		5000K	3880	129

SKU	Wattage	CCT	Lumens	LPW
PLT-80023	40	4000K	4400	110
	30	4000K	3300	110
	25	4000K	2750	110
PLT-80024	40	5000K	4400	110
	30	5000K	3300	110
	25	5000K	2750	110
PLT-80025	50	3500K	5500	110
	40	3500K	4400	110
	30	3500K	3300	110
PLT-80026	50	4000K	5500	110
	40	4000K	4400	110
	30	4000K	3300	110
PLT-80027	50	5000K	5500	110
	40	5000K	4400	110
	30	5000K	3300	110