

PLT PremiumSpec

ARCHITECTURAL LED LINEAR

A Discreet Architecturally-pleasing Aesthetic.
2'* / 3'* / 4' Linear Portfolio



* Available via Special Order. Call 1-800-624-4488

Gives new meaning to
lighting aesthetic








Aesthetic

Ultra-thin semi-transparent optics, like floating in the air



Mini Internal LED Driver
CCT & Wattage Adjustable By Dip Switch

The Perfect Light For All Purposes

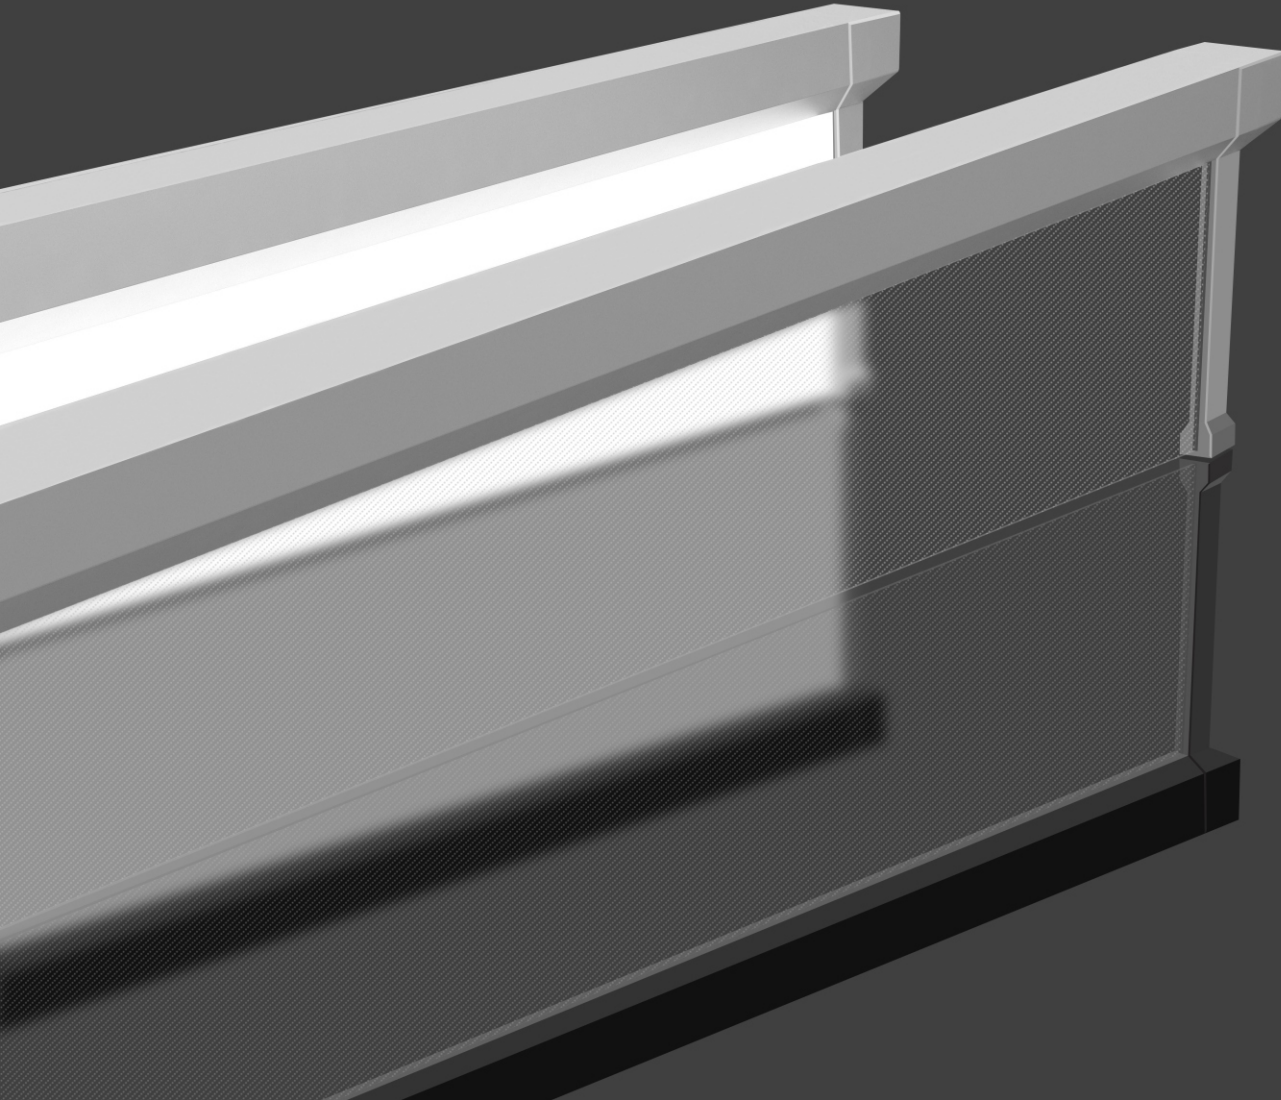

90+ Color Rendering Index

1300 lumen/foot

Our CCT adjustable solutions, and wattage adjustable to maximize light compatibility with internal driver designed.




Lumen Package

Length	High	Medium	Low
2'*	1000lm/ft, 10w/ft	—	—
3'*	1300lm/ft, 13w/ft	1000lm/ft, 10w/ft	650lm/ft, 6.5w/ft
PLT-90332 - 4'	1000lm/ft, 10w/ft	750lm/ft, 7.5w/ft	500lm/ft, 5w/ft

*Available via Special Order. Call 1-800-624-4488

Unique Design

The eye-catching sloping silhouette end cap adds an elegant finishing touch.

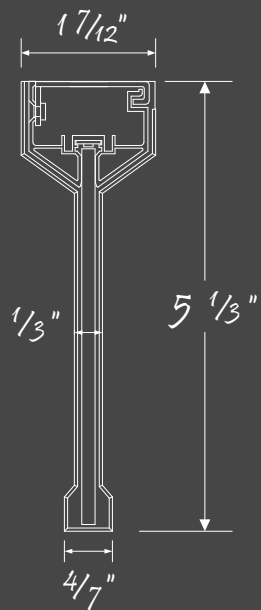

A Step Forward In Ambient Interior Illumination


The sleek profile is designed to blend into clean, minimalist architectural spaces featuring simple yet powerful lines.

It enables designers to mount the luminaire on walls and ceilings to enhance architectural styling or add a unique flair to the interior design of a space.

With three options built in-house, this fixture makes it easy to get the light where you need it with offering new opportunities to capture the beauty and benefits of true lighting.

Sleek Profile

1.59" Wide ■ 5.33" Height ■ 23.64"/35.43"/47.24" Lengths

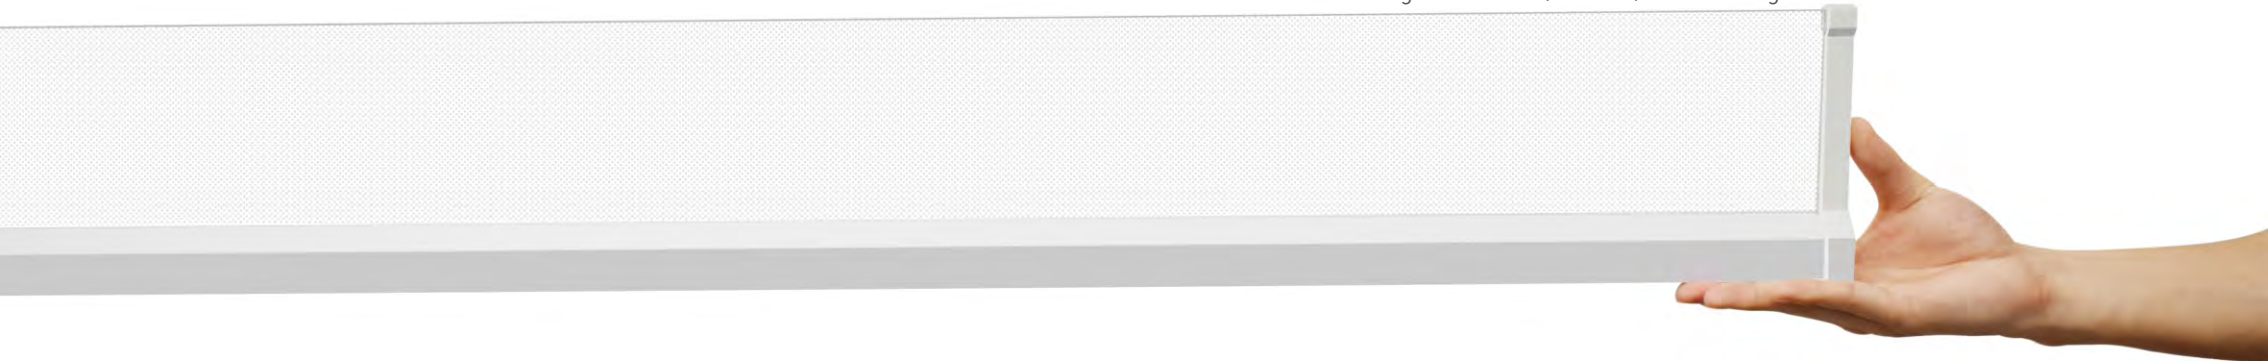





PENDANT

Drop Or Dry Ceiling Compatible

Our linear fixture delivers precise, textural, and comfortable linear lighting for a variety of applications, compatible for drop ceiling and dry ceiling.



Canopy Style

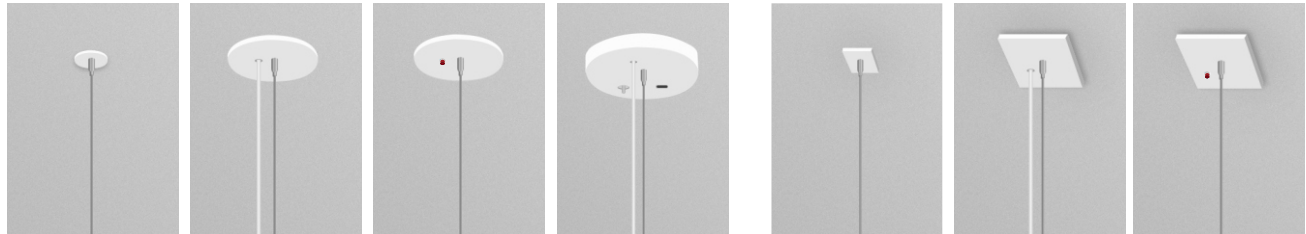

1.6" Round
(Non Power Feed)

4.5" Round
(Power Feed)


4.5" Round With
Emergency Driver*
(Non Power Feed)

5.8" Round With
Occupancy Sensor*
(Power Feed)

1.6" Square*
(Non Power Feed)




4.5" Square*
(Power Feed)

4.5" Square With *
Emergency Driver
(Non Power Feed)

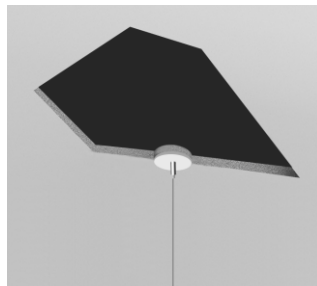


Dry Ceiling / Off Grid

"Various Hard Ceilings"
(Mount to J-box)

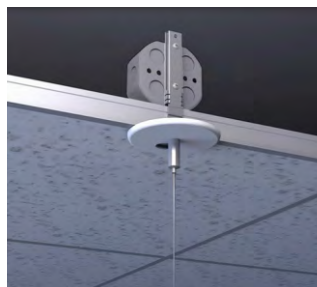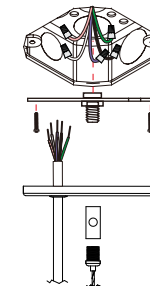


Drop Ceiling / On Grid*


Suspending the luminaire in the T-grid. Compatible for various T-grid, including 9/16" Flat, 9/16" Slot, 15/16" Flat.




9/16" Flat Ceiling




9/16" Slot Ceiling



15/16" Flat Ceiling



15/16" Slot Ceiling

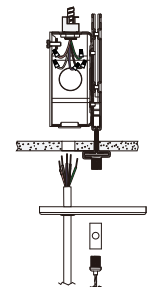

*Available via Special Order. Call 1-800-624-4488




908




Surface Mount*

It is attractive and easy to install with simple screws or threaded studs which pass through the housing to fasten the luminaire in place. Ideal for locations with low ceilings or where fire ratings prevent recessed luminaires.

**Requires PLT-90331 for surface mounting.*

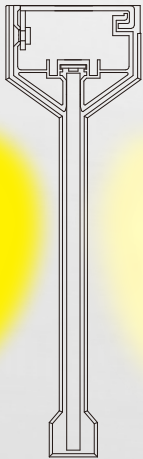



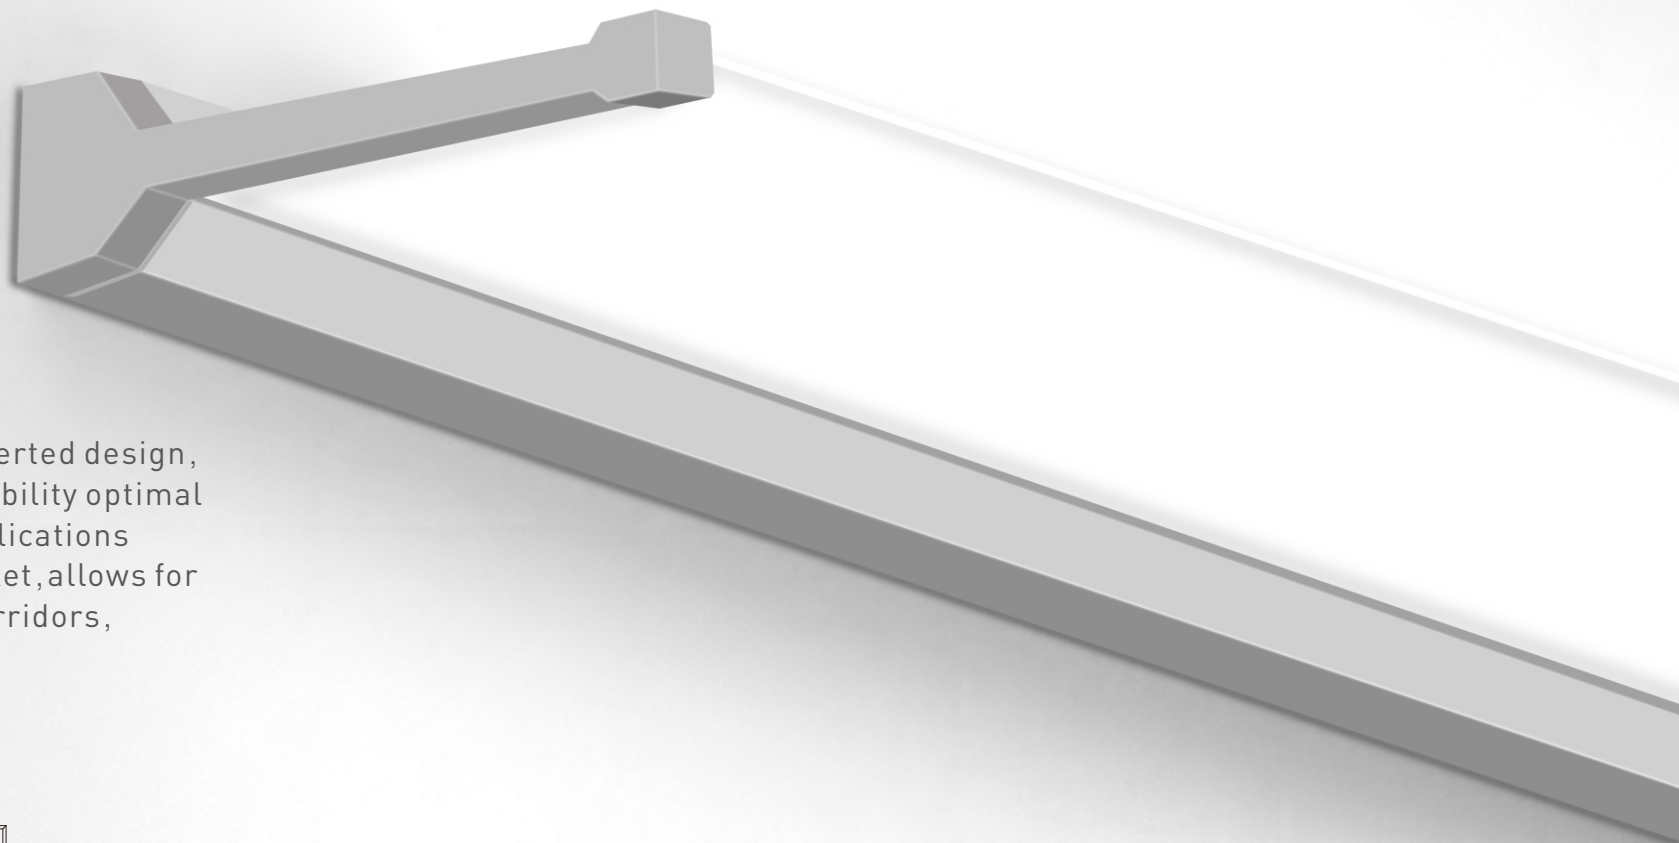

Wall Mount*

It is available in a surface reverted design, with a sleek low-profile sensibility optimal for architectural lighting applications without any wall mount bracket, allows for easy installation, ideal for corridors, stairwells, and more.




**Requires PLT-90331 for wall mounting.*



Meet the family

Mounting Options

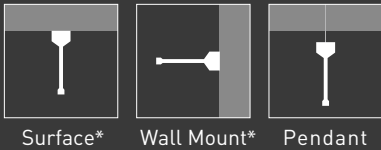

Surface* Wall Mount* Pendant

Function




Input Voltage

110-277V AC
110-347V AC**

CRI

90+

Length

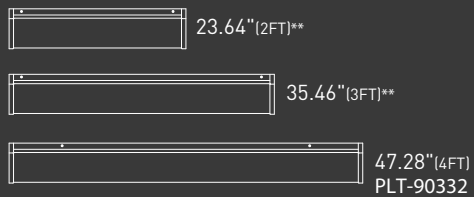

Optics

Ultra-thin semi-transparent vertical optics, enveloped in a signature sloping silhouette where the frame meets the optics.

Finish Options

- White
- Custom Finish**

**Requires PLT-90331 for surface or wall mounting.*

***Available via Special Order. Call 1-800-624-4488.*

