


|               |       |
|---------------|-------|
| Project Name: | Type: |
| Part Number:  | Date: |

# CCT SELECT EMERGENCY TLED

## FEATURES


- Replaces 4' T8 fluorescent lamp
- Double ended wiring, Bypass application, operates on 120V-277V line voltage
- Built in Lithium battery produces 600 lumens in emergency mode
- 90 minutes of constant power in emergency mode
- 24 hours recharge time if the battery is depleted
- Continuous self testing in standard and emergency mode
- SelectKelvin switch for CCT selectability (3500K/4000K/5000K)
- Plastic/Aluminum housing eliminates breakage
- Fixture operating temperature: 32°F to 95°F (0°C to 35°C)
- Lamp ambient temperature: 32°F to 113°F (0°C to 45°C)
- Suitable for use in enclosed fixture and damp locations
- The emergency tube meets the performance requirements of UL924 but is not UL924 certified because it can be removed from an emergency lighting equipment.
- L70 rated lifetime up to 50,000 hours
- 5 year limited warranty\*

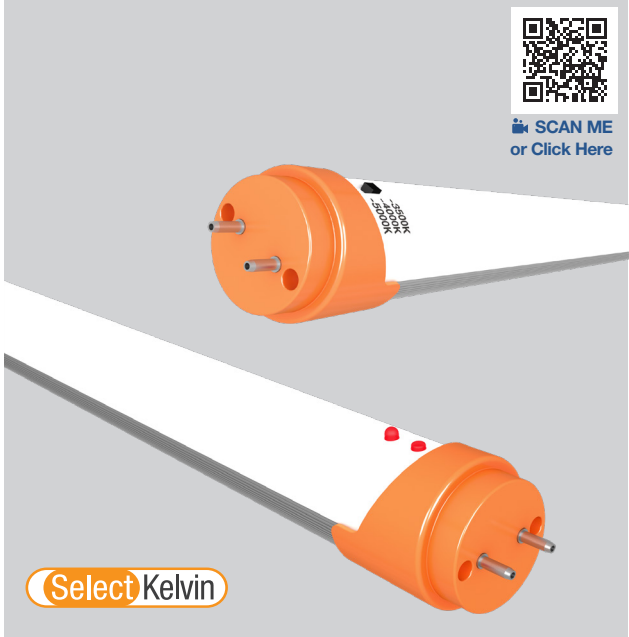

120523



## FOCUS FEATURE

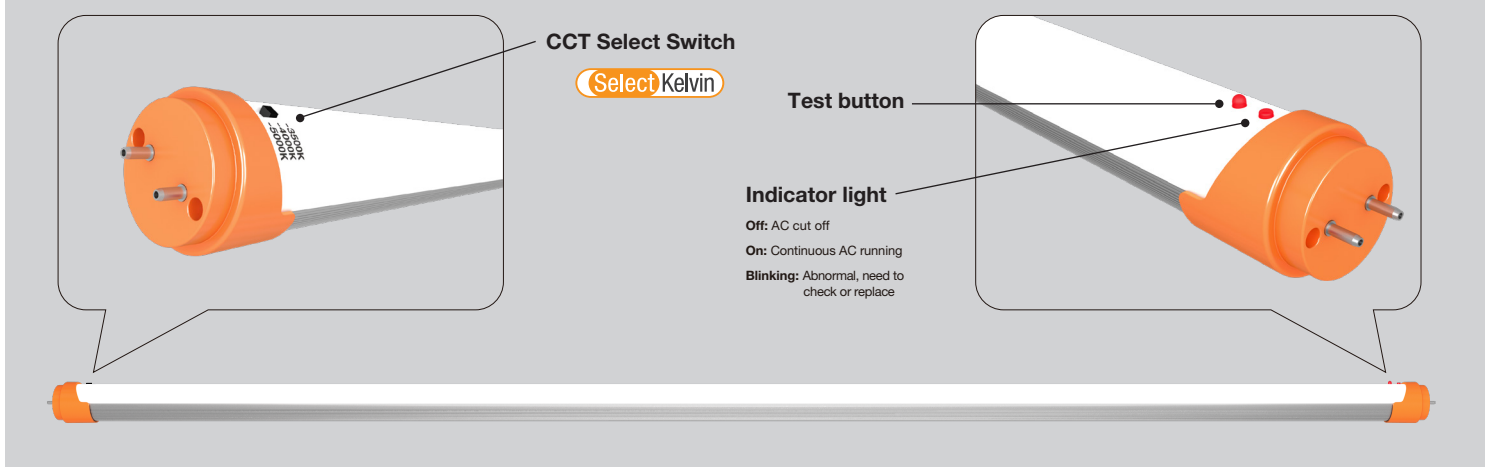

## SPECIFICATIONS

| Product | Model            | Mode      | Selectable CCTs | Lumens | Efficacy (LPW) | Equiv. | Wattage | Nominal Length | CRI | Life (hrs) | Beam Angle |
|---------|------------------|-----------|-----------------|--------|----------------|--------|---------|----------------|-----|------------|------------|
| 37410   | 15T8/4F/8CCTS/EM | Standard  | 3500K           | 1900   | 127            | 32W    | 15      | 4'             | 82  | 50,000     | 140°       |
|         |                  |           | 4000K           | 2000   | 133            |        |         |                |     |            |            |
|         |                  |           | 5000K           | 2000   | 133            |        |         |                |     |            |            |
|         |                  | Emergency | 3500K           | 600    | 133            | N.A.   | 4.5     |                |     |            |            |
|         |                  |           | 4000K           |        |                |        |         |                |     |            |            |
|         |                  |           | 5000K           |        |                |        |         |                |     |            |            |

\* Please visit [www.greencreative.com](http://www.greencreative.com) for Limited Warranty terms.



# CCT SELECT EMERGENCY TLED



## DIMENSION & WEIGHT



|        |                  |
|--------|------------------|
| Model  | 15T8/4F/8CCTS/EM |
| Base   | G13              |
| MOL    | 47-3/16"         |
| Dia.   | 1-1/16"          |
| Weight | 1.18lb           |

Where xxx means 824-965 which indicates CRI and color temperature

## INSTALLATION

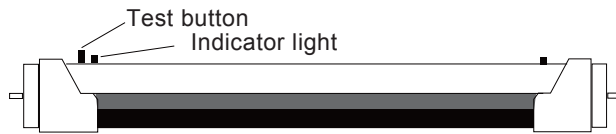



Note: Non-shunted lamp holders only. In case the existing lamp holders are shunted, they need to be changed and replaced with non-shunted lamp holders (not included).

### LED tube wiring diagram without dimming



This product has two input sides, one on each end. INPUT SIDE (fig. A) and EM INPUT SIDE (fig. B). INPUT SIDE is for ensure the lamp operate in standard mode and controlled through a wall switch, while EM INPUT SIDE provides power to charge to integrated battery, which should be always live except during a power outage.

The UNSWITCHED LINE must be installed on the EM INPUT SIDE of the tube that has the Test Button and Indicator Light while the SWITCHED LINE must be installed on the INPUT SIDE of the tube that has the CCT Select Switch.



## ORDERING INFORMATION

| Model            | Master Carton |                         |             | Shipping Carton |                              |             |
|------------------|---------------|-------------------------|-------------|-----------------|------------------------------|-------------|
|                  | Case Qty      | Case Dimensions (LxWxH) | Case Weight | Case Qty        | Case Dimensions (LxWxH)      | Case Weight |
| 15T8/4F/8CCTS/EM | N.A.          | N.A.                    | N.A.        | 25PCS           | 51-11/16" x 8-1/16" x 8-7/8" | 37.48lb     |

## CERTIFICATION INFORMATION

|         |                  |          |
|---------|------------------|----------|
| Product | Model            | DLC ID#  |
| 37410   | 15T8/4F/8CCTS/EM | S-NCHZQ9 |

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.