


Project Name:	Type:
Part Number:	Date:

CCT SELECT DIRECT PL OMNI

FEATURES


- Replaces 26W CFL lamps
- DIRect installation* - Compatible with most electronic ballast (G24q/GX24q)
- SelectKelvin technology - field selectable color temperature in 3000K, 3500K, and 4000K
- 0-10V dimmable (ballast dependent)*
- Omni directional light distribution equivalent to fluorescent lamps
- May be installed horizontally and vertically
- Exceptional high efficacy up to 126 LPW
- Suitable for damp locations and totally enclosed fixtures**
- UL Classified
- Lamp ambient temperature: -4°F to 113°F (-20°C to 45°C)
- Fixture operating temperature: -4°F to 95°F (-20°C to 35°C)
- Rated lifetime (L70): 50,000hrs
- 5 year limited warranty*** / 10 year available (see EXTENDED WARRANTIES table for information)

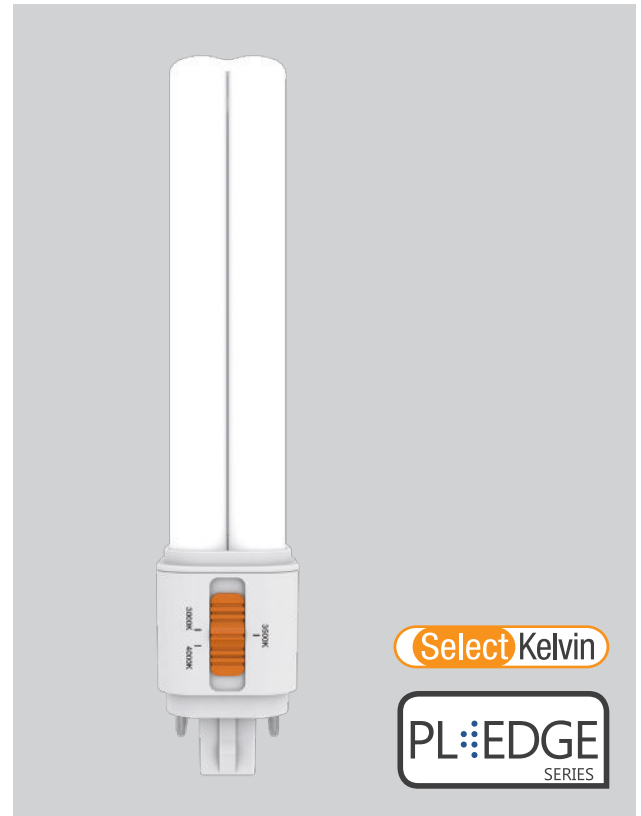

072723



FOCUS FEATURE

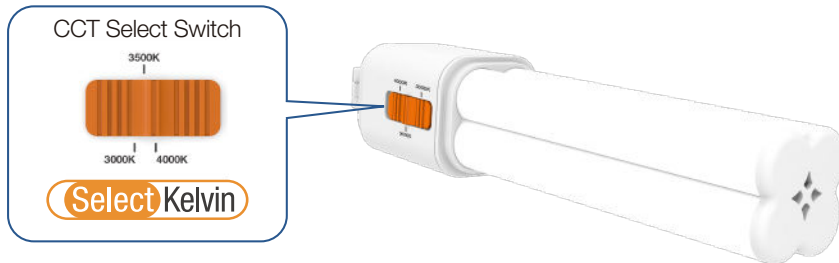

SPECIFICATIONS

Product	Model	Equiv.	Input Voltage	Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Power Factor	THD	Beam Angle	Dim.*	Fixture Rating**
37089	9.5PLO/8CCTS/DIR	26W	120-277V	9.5	3000K	1,150	121	82	0.9	<20%	360°	Yes	Enclosed
					3500K	1,200	126						
					4000K	1,200	126						

* Ballast Dependent. Please refer to www.greencreative.com for full ballast and dimmer compatibility list.

** Suitable for use in totally enclosed fixtures. Please make sure the minimum dimensions of the lamp compartment in the fixture meet the guidelines in the installation guide.

*** Please visit www.greencreative.com for Limited Warranty terms.


BALLAST PERFORMANCE

Model	Ballast Type	Bare Lamp Wattage	System Wattage	3000K Lumens	3500K Lumens	4000K Lumens
9.5PLO/8CCTS/DIR	18W	6.5	9	880	920	920
	26W	9.5	12	1,150	1,200	1,200
	42W	11.5	14.5	1,250	1,250	1,300




CCT SELECT DIRECT PL OMNI

DIMENSION & WEIGHT

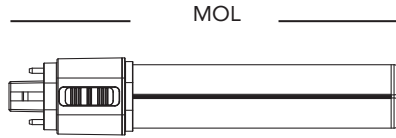


Dia.




Model	9.5PLO/8CCTS/DIR
Compatible base	G24q & GX24q
MOL	6-7/8"
Dia.	1-3/8"
Weight	0.23 lb


MINIMUM COMPARTMENT DIMENSIONS

Note – the base of this lamp is 1-3/8" by 1-3/8" and the opening in the reflector should be a minimum of 1-3/8" by 1-3/8" to insure a proper fit. For non-enclosed rated applications the minimum compartment must follow the below guidelines.

Non-enclosed Fixture Horizontal Installation 	Model Number		9.5PLO/8CCTS/DIR
	Lamp Compartment Dimensions	Diameter	6-1/8"
		Height	4-3/4"
	Maximum Lamps in Luminaire		2
Lampholder-to-Lampholder Spacing		3/8"	




Non-enclosed Fixture Vertical Installation 	Model Number		9.5PLO/8CCTS/DIR
	Lamp Compartment Dimensions	Diameter	6-5/16"
		Height	9-1/16"
Maximum Lamps in Luminaire		1	

For enclosed rated applications the minimum compartment must follow the below guidelines.

Wall Mounted Enclosed Fixture Installation 	Model Number		9.5PLO/8CCTS/DIR
	Lamp Compartment Dimensions	Length	11-13/16"
		Width	6-5/16"
		Height	2-3/4"
	Maximum Lamps in Luminaire		2
Lampholder-to-Lampholder Spacing		1-7/8"	

Product warranty is defined based on the condition of above minimum compartment size, maximum lamps in glass/metal luminaire.

TEMPERATURE

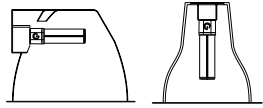Fixture operating temperature		Lamp ambient temperature	
 Non-enclosed Fixture	-4°F to 95°F (-20°C to 35°C)	 9.5PLO/8CCTS/DIR	-4°F to 113°F (-20°C to 45°C)
 Wall Mounted Enclosed Fixture			



CCT SELECT DIRECT PL OMNI

ORDERING INFORMATION

Model	Master Carton			Shipping Carton		
	Case Qty	Case Dimensions (LxWxH)	Case Weight	Case Qty	Case Dimensions (LxWxH)	Case Weight
9.5PLO/8CCTS/DIR	6PCS	7-5/16" x 4-11/16" x 3-3/8"	1.72 lb	24PCS	15-3/8" x 10-7/16" x 4-3/4"	7.5 lb

EXTENDED WARRANTIES *****

Model	Description
9.5PLO/8CCTS/DIR/10YEARWARRANTY	10 Year warranty for 9.5PLO/8CCTS/DIR

***** Warranty based on a maximum of 4,368 annual operating hours (per year for ten years) and exposure to a maximum ambient temperature of 80°F / 27°C.
 Note: All rights reserved. All sizes and specifications are subject to change at any time without notice