



# GREENCREATIVE

Your Partner for Professional Lighting Solutions

**PL:EDGE**  
SERIES



## PL EDGE SERIES

## FEATURES - PLO EDGE SERIES


- Replaces up to 26W CFL lamp
- Available in DIRECT installation and HYBRID BYPASS installation
- Exceptional efficacy up to 133LPW
- Suitable for damp location
- SDCM<=4 for consistent color temperature

- Omni directional light distribution suitable for horizontal or vertical installations
- 50,000hrs lifetime (L70)
- 5 year warranty
- UL Listed and UL Classified




### DIRECT ( TYPE A ) INSTALLATION

- Easy to install – Plug & Play
- Compatible with Instant / Program start electronic ballasts
- Direct replaces G24q & GX24q (4-pin) 13W-26W CFL lamps
- Compatible with 0-10V dimming ballasts




### HYBRID BYPASS ( TYPE A+B ) INSTALLATION

- Built-in universal driver – operates directly on 120–277V line voltage
- Can also operate directly on most magnetic ballasts
- Replaces G24q/GX24q 4-pin, G24d/GX24d 2-pin 13W-26W CFL lamps
- Non-dimmable

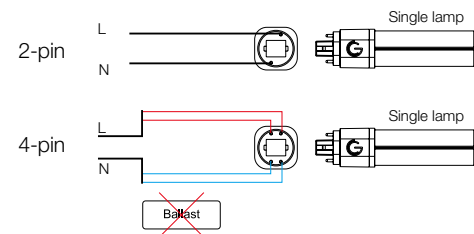

Bypass electronic ballasts to replace 4-pin CFL PL lamps (base type: G24q & GX24q)



Directly install on compatible magnetic ballasts

Bypass magnetic ballasts to replace 2-pin CFL PL lamps (base type: G24d & GX24d)

## QUICK OVERVIEW - PLO EDGE SERIES

Installation Type	Installation Direction	Base Type	Lamp profile	Equivalent CFL wattage	Lamp Wattage	Overall Length	Maximum Diameter	Weight	CCT
DIRECT INSTALLATION (Plug & Play)		G24q & GX24q (4-Pin CFL)		13W-18W	6.5W	5-11/16"	1-3/8"	0.16lb	2700K, 3000K, 3500K, 4000K
				26W	9.5W	6-7/8"	1-3/8"	0.18lb	2700K, 3000K, 3500K, 4000K
HYBRID BYPASS INSTALLATION	Horizontal Installation	G24q & GX24q (4-Pin CFL)		13W-18W	7W	5-11/16"	1-3/8"	0.18lb	2700K, 3000K, 3500K, 4000K
				26W	9W	6-7/8"	1-3/8"	0.22lb	2700K, 3000K, 3500K, 4000K
HYBRID BYPASS INSTALLATION	Vertical Installation	G24d & GX24d (2-Pin CFL)		13W-18W	7W	5-11/16"	1-3/8"	0.18lb	2700K, 3000K, 3500K, 4000K
				26W	9W	6-7/8"	1-3/8"	0.22lb	2700K, 3000K, 3500K, 4000K

### DIRECT ( TYPE A ) INSTALLATION

Product	Model	Equivalent CFL wattage	Wattage	Lumens	LPW	CCT	CRI (typ.)	Beam Angle	Input Voltage
Horizontal & Vertical Installation									
34988	6.5PLO/827/DIR	13W-18W	6.5W	720	110	2700K	82	360°	120-277V
34989	6.5PLO/830/DIR	13W-18W	6.5W	740	113	3000K	82	360°	120-277V
34990	6.5PLO/835/DIR	13W-18W	6.5W	780	120	3500K	82	360°	120-277V
34991	6.5PLO/840/DIR	13W-18W	6.5W	800	123	4000K	82	360°	120-277V
34992	9.5PLO/827/DIR	26W	9.5W	1,050	110	2700K	82	360°	120-277V
34993	9.5PLO/830/DIR	26W	9.5W	1,100	115	3000K	82	360°	120-277V
34994	9.5PLO/835/DIR	26W	9.5W	1,150	121	3500K	82	360°	120-277V
34995	9.5PLO/840/DIR	26W	9.5W	1,200	126	4000K	82	360°	120-277V

\*Ballast dependent, refer to [www.greencreative.com](http://www.greencreative.com) for full compatibility list.

### HYBRID BYPASS ( TYPE A+B ) INSTALLATION

Product	Model	Equivalent CFL wattage	Wattage	Lumens	LPW	CCT	CRI (typ.)	Beam Angle	Input Voltage
Horizontal & Vertical Installation									
34996	7PLO/827/HYBM	13W-18W	7W	770	110	2700K	82	360°	120-277V
34997	7PLO/830/HYBM	13W-18W	7W	790	112	3000K	82	360°	120-277V
34998	7PLO/835/HYBM	13W-18W	7W	820	117	3500K	82	360°	120-277V
34999	7PLO/840/HYBM	13W-18W	7W	850	121	4000K	82	360°	120-277V
35000	9PLO/827/HYBM	26W	9W	1,100	122	2700K	82	360°	120-277V
35001	9PLO/830/HYBM	26W	9W	1,150	125	3000K	82	360°	120-277V
35002	9PLO/835/HYBM	26W	9W	1,200	130	3500K	82	360°	120-277V
35003	9PLO/840/HYBM	26W	9W	1,250	133	4000K	82	360°	120-277V

## HOSPITALITY



## FEATURES - PL EDGE SERIES

- Replaces up to 42W 4-pin/2-pin CFL PL lamp
- Available in DIRECT installation, HYBRID BYPASS installation and BYPASS installation
- Exceptional efficacy up to 120LPW
- 310° rotatable base allows light to be directed as needed
- High CRI model available in direct installation
- SDCM $\leq$ 4 for consistent color temperature
- Suitable for damp location
- 50,000hrs lifetime (L70)
- 5 year warranty
- UL Listed and UL Classified
- DLC® listed, see quick overview for listed models



DIRECT (TYPE A) INSTALLATION	HYBRID BYPASS (TYPE A+B) INSTALLATION	BYPASS (TYPE B) INSTALLATION
<ul style="list-style-type: none"> <li>Easy to install – Plug &amp; Play</li> <li>Compatible with most electronic ballasts</li> <li>Direct replaces G24q &amp; GX24q 4-pin CFL PL lamps</li> <li>Compatible with 0-10V dimming ballasts</li> </ul>	<ul style="list-style-type: none"> <li>Built-in universal driver – operates directly on 120 – 277V line voltage</li> <li>Can also operate directly on most magnetic ballasts</li> <li>Replaces G24q/GX24q 4-pin, G24d/GX24d 2-pin 13W-26W CFL PL lamps</li> <li>Non-dimmable</li> </ul>	<ul style="list-style-type: none"> <li>Built-in universal driver – operates directly on 120 – 277V line voltage</li> <li>Replaces G24q/GX24q 4-pin, G24d/GX24d 2-pin 42W CFL PL lamps</li> <li>Non-dimmable</li> </ul>
	<p>Bypass electronic ballasts to replace 4-pin CFL PL lamps (base type: G24q &amp; GX24q)</p> <p>Directly install on compatible magnetic ballasts</p> <p>Bypass magnetic ballasts to replace 2-pin CFL PL lamps (base type: G24d &amp; GX24d)</p>	<p>Bypass electronic ballasts to replace 4-pin CFL PL lamps (base type: G24q &amp; GX24q)</p>

## SHOPPING MALL



## QUICK OVERVIEW - PL EDGE SERIES

Installation Type	Installation Direction	Base Type	Lamp profile	Equivalent CFL wattage	Lamp Wattage	Overall Length	Maximum Diameter	Weight	CCT
DIRECT INSTALLATION (Plug & Play)	Horizontal Installation	G24q & GX24q (4-Pin CFL)		42W	14.5W	6-5/8"	1-3/4"	0.52lb	3000K, 3500K, 4000K
				26W	8.5W	6-3/8"	1-3/8"	0.18lb	2700K, 3000K, 3500K, 4000K
				26W High CRI	10.5W	6-3/8"	1-3/8"	0.18lb	3000K
				13-18W	5.5W	5-3/8"	1-3/8"	0.15lb	2700K, 3000K, 3500K, 4000K
				42W	17W	6-7/16"	3-7/16"	0.65lb	3000K, 3500K, 4000K
	Vertical Installation	G24q & GX24q (4-Pin CFL)		26W	9.5W	5-3/16"	3-9/16"	0.20lb	2700K, 3000K, 3500K, 4000K
				26W High CRI	11W	5-3/16"	3-9/16"	0.20lb	3000K
				13W-18W	6W	5-3/16"	2-9/16"	0.14lb	2700K, 3000K, 3500K, 4000K
				26W	8W	6-3/8"	1-3/8"	0.18lb	2700K, 3000K, 3500K, 4000K
				13W-18W	5.5W	5-3/8"	1-3/8"	0.15lb	2700K, 3000K, 3500K, 4000K
HYBRID BYPASS INSTALLATION	Horizontal installation	G24q & GX24q (4-Pin CFL)		26W	8.5W	5-3/16"	3-9/16"	0.21lb	2700K, 3000K, 3500K, 4000K
				13W-18W	5.5W	5-3/16"	2-9/16"	0.16lb	3500K, 4000K
	Vertical Installation	G24d & GX24d (2-Pin CFL)		42W	15.5W	6-11/16"	1-3/4"	0.55lb	3000K, 3500K, 4000K
				42W	16.5W	6-7/16"	3-1/2"	0.66lb	3000K, 3500K, 4000K

PERFORMANCE - PL EDGE SERIES

DIRECT ( TYPE A ) INSTALLATION									
Product	Model	Equivalent CFL wattage	Wattage	Lumens	LPW	CCT	CRI (typ.)	Beam Angle	Input Voltage*
Horizontal Installation									
98244	14.5PLH/830/DIR	42W	14.5	1,700	117	3000K	82	110°	120-277V
98245	14.5PLH/835/DIR	42W	14.5	1,750	121	3500K	82	110°	120-277V
98246	14.5PLH/840/DIR	42W	14.5	1,800	124	4000K	82	110°	120-277V
28366	8.5PLH/827/DIR/R	26W	8.5	870	102	2700K	82	110°	120-277V
28367	8.5PLH/830/DIR/R	26W	8.5	950	112	3000K	82	110°	120-277V
28368	8.5PLH/835/DIR/R	26W	8.5	950	112	3500K	82	110°	120-277V
28369	8.5PLH/840/DIR/R	26W	8.5	1,020	120	4000K	82	110°	120-277V
57903	10.5PLH/930/DIR	26W	10.5	890	85	3000K	90	110°	120-277V
57895	5.5PLH/827/DIR/RC	13W-18W	5.5	520	95	2700K	82	110°	120-277V
57896	5.5PLH/830/DIR/RC	13W-18W	5.5	550	100	3000K	82	110°	120-277V
57897	5.5PLH/835/DIR/RC	13W-18W	5.5	550	100	3500K	82	110°	120-277V
57898	5.5PLH/840/DIR/RC	13W-18W	5.5	560	102	4000K	82	110°	120-277V
Vertical Installation									
98248	17PLV/830/DIR	42W	17	1,900	112	3000K	82	120°	120-277V
98249	17PLV/835/DIR	42W	17	1,950	115	3500K	82	120°	120-277V
98250	17PLV/840/DIR	42W	17	2,000	118	4000K	82	120°	120-277V
28374	9.5PLV/827/DIR/R	26W	9.5	950	100	2700K	82	120°	120-277V
28375	9.5PLV/830/DIR/RC	26W	9.5	1,000	105	3000K	82	120°	120-277V
28376	9.5PLV/835/DIR/RC	26W	9.5	1,000	105	3500K	82	120°	120-277V
28377	9.5PLV/840/DIR/RC	26W	9.5	1,020	107	4000K	82	120°	120-277V
57918	11PLV/930/DIR/R	26W	11	920	84	3000K	90	120°	120-277V
28370	6PLV/827/DIR/R	13W-18W	6	600	100	2700K	82	120°	120-277V
28371	6PLV/830/DIR/R	13W-18W	6	620	103	3000K	82	120°	120-277V
28372	6PLV/835/DIR/R	13W-18W	6	620	103	3500K	82	120°	120-277V
28373	6PLV/840/DIR/R	13W-18W	6	640	107	4000K	82	120°	120-277V

\*Ballast dependent, refer to [www.greencreative.com](http://www.greencreative.com) for full compatibility list.

PERFORMANCE - PL EDGE SERIES

HYBRID BYPASS ( TYPE A+B ) INSTALLATION									
Product	Model	Equivalent CFL wattage	Wattage	Lumens	LPW	CCT	CRI (typ.)	Beam Angle	Input Voltage
Horizontal Installation									
98399	8PLH/827/HYBM	26W	8	870	109	2700K	82	110°	120-277V
98400	8PLH/830/HYBM	26W	8	920	115	3000K	82	110°	120-277V
98401	8PLH/835/HYBM	26W	8	920	115	3500K	82	110°	120-277V
98402	8PLH/840/HYBM	26W	8	950	119	4000K	82	110°	120-277V
36086	5.5PLH/827/HYBM	13W-18W	5.5	550	100	2700K	82	110°	120-277V
34856	5.5PLH/830/HYBM	13W-18W	5.5	550	100	3000K	82	110°	120-277V
36642	5.5PLH/835/HYBM/R	13W-18W	5.5	600	109	3500K	82	110°	120-277V
36643	5.5PLH/840/HYBM/R	13W-18W	5.5	620	113	4000K	82	110°	120-277V
Vertical Installation									
98387	8.5PLV/827/HYBM	26W	8.5	950	112	2700K	82	120°	120-277V
98388	8.5PLV/830/HYBM	26W	8.5	1,000	118	3000K	82	120°	120-277V
98389	8.5PLV/835/HYBM	26W	8.5	1,000	118	3500K	82	120°	120-277V
98390	8.5PLV/840/HYBM	26W	8.5	1,020	120	4000K	82	120°	120-277V
98385	5.5PLV/835/HYBM	13W-18W	5.5	600	109	3500K	82	120°	120-277V
98386	5.5PLV/840/HYBM	13W-18W	5.5	620	113	4000K	82	120°	120-277V
BYPASS ( TYPE B ) INSTALLATION									
Product	Model	Equivalent CFL wattage	Wattage	Lumens	LPW	CCT	CRI (typ.)	Beam Angle	Input Voltage
Horizontal Installation									
36639	15.5PLH/830/BYP/R	42W	15.5	1,850	119	3000K	82	110°	120-277V
36640	15.5PLH/835/BYP/R	42W	15.5	1,950	126	3500K	82	110°	120-277V
36641	15.5PLH/840/BYP/R	42W	15.5	2,000	129	4000K	82	110°	120-277V
Vertical Installation									
98256	16.5PLV/830/BYP	42W	16.5	1,800	109	3000K	82	120°	120-277V
98257	16.5PLV/835/BYP	42W	16.5	1,850	112	3500K	82	120°	120-277V
98258	16.5PLV/840/BYP	42W	16.5	1,900	115	4000K	82	120°	120-277V

## FEATURES - PLS EDGE SERIES



- Replaces up to 13W 4-pin/2-pin CFL PLS lamp
- Available in HYBRID BYPASS installation and BYPASS installation
- Exceptional efficacy up to 113LPW
- Dedicated configuration for horizontal and vertical installation
- SDCM<=4 for consistent color temperature

- 180° rotatable base in horizontal installation design to maximize lamp performance in fixture
- Suitable for damp location
- 50,000hrs lifetime (L70)
- 5 year warranty
- UL classified




### HYBRID BYPASS ( TYPE A+B ) INSTALLATION

- Built-in universal driver – operates directly on 120 – 277V line voltage
- Can also operate directly on most magnetic ballasts
- Replaces G23/GX23 2-pin CFL PL lamps
- Non-dimmable



### BYPASS ( TYPE B ) INSTALLATION

- Built-in universal driver – operates directly on 120 – 277V line voltage
- Replaces 2G7/2GX7 4-pin CFL PL lamps
- Non-dimmable

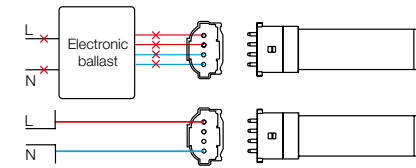

## HOSPITAL



## QUICK OVERVIEW - PLS EDGE SERIES

Installation Type	Installation Direction	Base Type	Lamp profile	Equivalent CFL wattage	Lamp Wattage	Overall Length	Maximum Diameter	Weight	CCT	Fixture Rating
HYBRID BYPASS INSTALLATION	Horizontal Installation	G23(HYBrid)		7W-9W	3.5W	5-5/16"	1-3/8"	0.08lb	2700K, 3000K, 3500K, 4000K	Enclosed
		GX23(HYBrid)		13W	5.5W	7"	1-3/8"	0.08lb	2700K, 3000K, 3500K, 4000K	Enclosed
	Vertical Installation	G23(HYBrid)		13W	5.5W	5-1/2"	1-3/8"	0.15lb	2700K, 3000K, 3500K, 4000K	Non-Enclosed
		GX23(HYBrid)		13W	5.5W	5-1/4"	2-9/16"	0.16lb	2700K, 3000K, 3500K, 4000K	Non-Enclosed
BYPASS INSTALLATION	Horizontal Installation	2G7 (BYPass)		7W-9W	3.5W	4-3/4"	1-7/16"	0.06lb	3500K	Enclosed
		2GX7 (BYPass)		13W	5.5W	6-9/16"	1-7/16"	0.06lb	3500K	Enclosed

## PERFORMANCE - PLS EDGE SERIES

### HYBRID BYPASS ( TYPE A+B ) INSTALLATION

Product	Model	Equivalent CFL wattage	Wattage	Lumens	LPW	CCT	CRI (typ.)	Beam Angle	Input Voltage
Horizontal Installation									
36627	3.5PLS/827/HYB/G23/R	7-9W	3.5	325	93	2700K	82	120°	120-277V
36628	3.5PLS/830/HYB/G23/R	7-9W	3.5	340	97	3000K	82	120°	120-277V
36629	3.5PLS/835/HYB/G23/R	7-9W	3.5	350	100	3500K	82	120°	120-277V
36630	3.5PLS/840/HYB/G23/R	7-9W	3.5	370	106	4000K	82	120°	120-277V
36632	5.5PLS/827/HYB/GX23/R	13W	5.5	520	95	2700K	82	110°	120-277V
36633	5.5PLS/830/HYB/GX23/R	13W	5.5	550	100	3000K	82	110°	120-277V
36634	5.5PLS/835/HYB/GX23/R	13W	5.5	600	109	3500K	82	110°	120-277V
36635	5.5PLS/840/HYB/GX23/R	13W	5.5	620	113	4000K	82	110°	120-277V
36644	5.5PLSH/827/HYB/GX23/R	13W	5.5	570	104	2700K	82	110°	120-277V
36645	5.5PLSH/830/HYB/GX23/R	13W	5.5	580	105	3000K	82	110°	120-277V
36646	5.5PLSH/835/HYB/GX23/R	13W	5.5	600	109	3500K	82	110°	120-277V
36647	5.5PLSH/840/HYB/GX23/R	13W	5.5	620	113	4000K	82	110°	120-277V
Vertical Installation									
98403	5.5PLSV/827/HYB/GX23	13W	5.5	570	104	2700K	82	120°	120-277V
98404	5.5PLSV/830/HYB/GX23	13W	5.5	600	109	3000K	82	120°	120-277V
98405	5.5PLSV/840/HYB/GX23	13W	5.5	600	109	3500K	82	120°	120-277V
98406	5.5PLSV/850/HYB/GX23	13W	5.5	620	113	4000K	82	120°	120-277V

### BYPASS ( TYPE B ) INSTALLATION

Product	Model	Equivalent CFL wattage	Wattage	Lumens	LPW	CCT	CRI (typ.)	Beam Angle	Input Voltage
Horizontal Installation									
36631	3.5PLS/835/BYP/2G7/R	7W-9W	3.5	350	100	3500K	82	120°	120-277V
36637	5.5PLS/835/BYP/2GX7/R	13W	5.5	600	109	3500K	82	110°	120-277V

## FEATURES - PLL EDGE SERIES


- Replaces up to 40W 2G11 4-pin PLL fluorescent lamp
- Available in DIRECT installation and BYPASS installation
- Opaque glass eliminates pixilation and reduces glare
- Exceptional efficacy up to 162LPW
- Extra wide up to 280° light emitting area
- SDCM<=4 for consistent color temperature

- Suitable for damp location
- 50,000hrs lifetime (L70)
- 5 year warranty
- UL Listed and UL Classified
- DLC® listed, see quick overview for listed models



### DIRECT ( TYPE A ) INSTALLATION


- Easy to install – Plug & Play
- Compatible with Instant / Program start electronic ballasts
- Non-dimmable



### BYPASS ( TYPE B ) INSTALLATION

- Built-in universal driver – operates directly on 120 – 277V line voltage
- Replaces 2G11 CFL PL lamps
- Non-dimmable

Step 1. Cut all wires connected to the ballast, remove the ballast

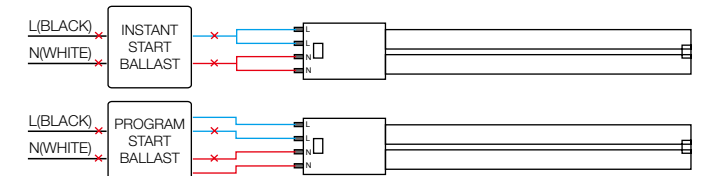


Step 2. Rewire the fixture according to the wiring configuration



### EXTERNAL DRIVER ( TYPE C ) INSTALLATION



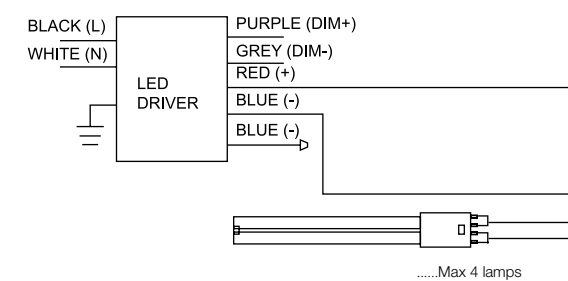






- Compatible with GREEN CREATIVE external drivers only
- Replaces 36W / 40W 4-pin (2G11) CFL lamps
- 0-10V dimming (dims to OFF)\*-with SelectDrive Type C driver
- 0-10V dimming (dims to 10%)-with single wattage Type C driver



### OFFICE LIGHTING



QUICK OVERVIEW - PLL EDGE SERIES

Installation Type	Installation Direction	Base Type	Lamp profile	Equivalent CFL wattage	Lamp Wattage	Overall Length	Maximum Diameter	Weight	CCT
DIRECT INSTALLATION	Horizontal Installation	2G11		40W	13W	22-1/2"	1-11/16"	0.31lb	3000K 3500K 4000K
				36W	14.5W	16-15/16"	1-11/16"	0.24lb	3500K 4000K
BYPASS INSTALLATION	Horizontal Installation	2G11		40W	17W	22-1/2"	1-11/16"	0.38lb	3000K 3500K 4000K
				36W	16W	16-7/16"	1-11/16"	0.30lb	3500K 4000K
				24W	10W	12-11/16"	1-11/16"	0.25lb	3500K 4000K
				18W	8.5W	8-15/16"	1-11/16"	0.20lb	3500K 4000K
EXTERNAL DRIVER INSTALLATION	Horizontal Installation	2G11		40W	19W	22-1/2"	1-11/16"	0.37lb	3500K 4000K
				40W	14W	22-1/2"	1-11/16"	0.37lb	3500K 4000K
				36W	13W	16-7/16"	1-11/16"	0.30lb	3500K 4000K

DIRECT ( TYPE A ) INSTALLATION

Product	Model	Equivalent PLL wattage	Wattage	Lumens	LPW	CCT	CRI (typ.)	Beam Angle	Input Voltage
Horizontal Installation									
98477	13PLL/830/GL/DIR	40W	13W	2,050	158	3000K	82	160°	120-277V
98478	13PLL/835/GL/DIR	40W	13W	2,100	162	3500K	82	160°	120-277V
98479	13PLL/840/GL/DIR	40W	13W	2,100	162	4000K	82	160°	120-277V
36777	13PLL/830/GL/DIR/R	40W	13W	1,900	146	3000K	82	140°	120-277V
36778	13PLL/835/GL/DIR/R	40W	13W	2,000	154	3500K	82	140°	120-277V
36779	13PLL/840/GL/DIR/R	40W	13W	2,000	154	4000K	82	140°	120-277V
98488	14.5PLL/835/GL/DIR	36W	14.5W	1,950	134	3500K	82	160°	120-277V
98489	14.5PLL/840/GL/DIR	36W	14.5W	2,000	138	4000K	82	160°	120-277V

\*Ballast dependent, refer to www.greencreative.com for full compatibility list.

BYPASS ( TYPE B ) INSTALLATION

Product	Model	Equivalent PLL wattage	Wattage	Lumens	LPW	CCT	CRI (typ.)	Beam Angle	Input Voltage
Horizontal Installation									
34858	8.5PLL/835/GL/BYP	18W	8.5W	950	112	3500K	82	160°	120-277V
34859	8.5PLL/840/GL/BYP	18W	8.5W	980	115	4000K	82	160°	120-277V
34861	10PLL/835/GL/BYP	24W	10W	1,200	120	3500K	82	160°	120-277V
34862	10PLL/840/GL/BYP	24W	10W	1,250	125	4000K	82	160°	120-277V

QUICK OVERVIEW - PLL EDGE SERIES


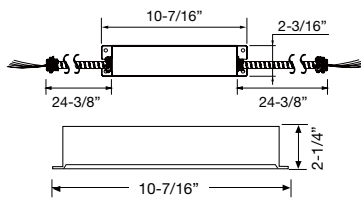


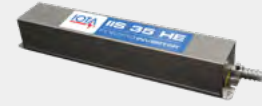

BYPASS ( TYPE B ) INSTALLATION

Product	Model	Equivalent PLL wattage	Wattage	Lumens	LPW	CCT	CRI (typ.)	Beam Angle	Input Voltage
Horizontal Installation									
34864	16PLL/835/GL/BYP	36W	16W	1,950	122	3500K	82	160°	120-277V
34865	16PLL/840/GL/BYP	36W	16W	2,000	125	4000K	82	160°	120-277V
34866	17PLL/830/GL/BYP	40W	17W	2,050	121	3000K	82	160°	120-277V
34867	17PLL/835/GL/BYP	40W	17W	2,150	126	3500K	82	160°	120-277V
34868	17PLL/840/GL/BYP	40W	17W	2,200	129	4000K	82	160°	120-277V
36983	17PLL/830/BYP/R	40W	17W	2,050	121	3000K	82	160°	120-277V
36984	17PLL/835/BYP/R	40W	17W	2,150	126	3500K	82	160°	120-277V
36985	17PLL/840/BYP/R	40W	17W	2,200	129	4000K	82	160°	120-277V

EXTERNAL DRIVER ( TYPE C ) INSTALLATION

Product	Model	Equivalent PLL wattage	Wattage	Lumens	LPW	CCT	CRI (typ.)	Beam Angle	Input Voltage
Horizontal Installation									
36704	13PLL/835/EXT	36W	13W	1,800	138	3500K	82	110°	120-277V
36705	13PLL/840/EXT	36W	13W	2,000	154	4000K	82	110°	120-277V
36707	14PLL/835/EXT	40W	14W	2,000	143	3500K	82	140°	120-277V
36708	14PLL/840/EXT	40W	14W	2,200	157	4000K	82	140°	120-277V
36710	19PLL/835/EXT	40W	19W	2,600	137	3500K	82	140°	120-277V
36711	19PLL/840/EXT	40W	19W	2,800	147	4000K	82	140°	120-277V
35896	15T8T5HEDRIVER/SD/2CH	15W / SelectDrive 120-277V with 0-10V Dimming External LED Driver for use with 1-2 PLL EXT Lamps							
35897	15T8T5HEDRIVER/SD/4CH	15W / SelectDrive 120-277V with 0-10V Dimming External LED Driver for use with 1-4 PLL EXT Lamps							
98259	15T8T5HEDRIVER/2CH/R	15W / 120-277V with 0-10V Dimming External LED Driver for use with 1-2 PLL EXT Lamps							
98260	15T8T5HEDRIVER/4CH/R	15W / 120-277V with 0-10V Dimming External LED Driver for use with 1-4 PLL EXT Lamps							
98261	24T5HODRIVER/2CH/R	24W / 120-277V with 0-10V Dimming External LED Driver for use with 1-2 PLL EXT Lamps							
98262	24T5HODRIVER/4CH/R	24W / 120-277V with 0-10V Dimming External LED Driver for use with 1-4 PLL EXT Lamps							

ACCESSORY ORDERING INFORMATION

Product	Model	Description	Pictures	Dimensions	Compatible Skus
98003	23EMDRIVER	California Title 20 Compliant 23W Emergency LED Driver (Field Installation)			8PLH/8xx/HYBM/yy 15.5PLH/8xx/BYP/yy 8.5PLV/8xx/HYBM/yy 16.5PLV/8xx/BYP/yy 7PLO/827/HYBM/yy 9PLO/827/HYBM/yy 3.5PLS/8xx/HYB/G23/yy 5.5PLSV/8xx/HYB/GX23/yy 8.5PLL/8xx/GL/BYP/yy 10PLL/8xx/GL/BYP/yy 16PLL/8xx/GL/BYP/yy 17PLL/8xx/GL/BYP/yy
58012	35EMINVERTER	35W Emergency Inverter (Field Installation)			5.5PLH/xxx/HYBM/yy 5.5PLH/xxx/HYBM/R 8PLH/xxx/HYBM/yy 5.5PLV/xxx/HYBM/yy 8.5PLV/xxx/HYBM/yy
58013	35EMINVERTER/CEC	California Title 20 Compliant 35W Emergency Inverter (Field Installation)			

xx -Refers to the CCT yy - Refers to model generations within the same nominal performance Typically blank, 'R', or 'RC'



GREENCREATIVE

**Your Partner for Professional Lighting Solutions**

