



LED Down Wall Sconce, Modern Porch Light



Description


The LED Down Wall Sconce can be used in both interior and exterior areas, and is available in different finishes, making it suitable for a variety of styles while adding a modern look to your home.

Features

- * Aluminum body with glass diffuser
- * Paint treatment effectively extends the service life
- * Elegant design provides a more high end look
- * Installation Down
- * Rated for long life - over 50,000 hours
- * Protection Rate: IP65
- * cETLus Listed




DIMENSIONS

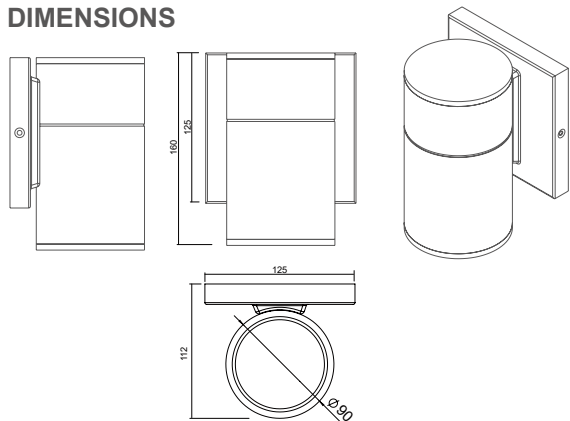

D90XH160mm(D3.5"H6.3")

INSTALLATION

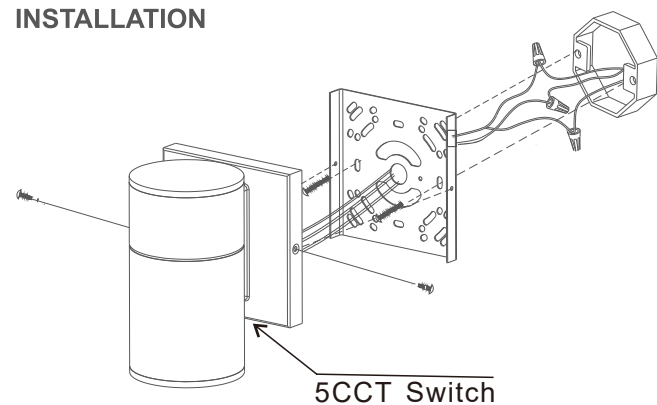

SPECIFICATIONS

Model	PLT-12711
Watts	10W
CRI	90Ra+ (80Ra Optional*)
Color Temperature(K)**	Field Selectale 2700K/3000K/3500K/4000K/5000K
Light Ouput(lm)**	839 lm
Default Driver Input	AC120-277V, 60Hz
Dimming	Non-dimmable
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	60°
Voltage	120-347V

PACKAGE

Weight.(g)	713g
Qty/CTN (pcs)	6pcs/CTN
Box Dimension	485*290*220mm

* 80 CRI Version - NPS-00164 Special Order. Call 1-800-624-4488.

** See Selectable Table for full breakdown.

SELECTABLE TABLE

Wattage	CCT	Lumens	LPW
10	2700	728	73
	3000	754	75
	3500	810	81
	4000	840	84
	5000	837	84

INCLUDED IN BOX

- LED down wall sconce
- Mounting Brackets
- 3 wire nuts, 2 0.8-inch Philips-head screws, 2 Allen-head screws