



## DESCRIPTION

Featuring a low-profile design, these UFO LED high bays are a cost-effective solid-state solution for high bay applications, providing a one-for-one replacement of existing 400-Watt metal halide fixtures.

## FEATURES

- Up to 150 LPW ultra-high efficiency delivers superior performance over older HID high bays
- 6' power cord standard for more installation flexibility
- 0-10V dimming
- Optional sensors and remote control; see Accessories section for more information
- Optional u-bracket available for surface mounting; see Mounting Accessories section for more information

## LISTINGS

- UL rated for wet locations
- IP65

## PERFORMANCE

- CRI: >80
- CCT: 4000K or 5000K
- LED L70 Life Hours: 140,000 hours
- Philips Lumileds SMD LEDs

## THERMAL

- -40°F to 122°F (-40°C to 50°C) operating temperature

## ELECTRICAL

- THD: ≤20%
- Power Factor: ≥0.9
- Input Voltage: 120-277V
- Surge Protection: 6kV

## INSTALLATION

- Suspended mounting with included 10mm ring or surface mounting (u-bracket sold separately); see installation instructions for more information

## CONSTRUCTION

- Slim, lightweight die-cast aluminum construction allows for quick and easy installation
- PC lens protects LEDs while evenly distributing light
- Black or white finish

Project name	Type
Catalog number	
Comments	Voltage
Approved by	Date



## WARRANTY

- 5-year limited warranty; see [pltsolutions.com](http://pltsolutions.com) for warranty details

## APPLICATIONS

- Warehouses
- Manufacturing Plants
- Distribution Centers
- Grocery Stores
- Gymnasiums
- Indoor Recreational Facilities
- Cold Storage
- Big Box Retail
- Service Repair Centers

## PERFORMANCE SUMMARY

Item #	Model	Watts	Lumens	LPW	CCT	CRI	Dimming	Voltage	Replaces	Finish
PLT-13126	UFO	150	22,500	150	4000K	>80	0-10V	120-277V	MH400	Black
PLT-13127	UFO	150	22,500	150	5000K	>80	0-10V	120-277V	MH400	White

## ACCESSORIES

SKU	Description
PLT-12844	High Bay Occupancy Sensor and Photocell - Microwave - White - Screw-in Connector - 12 Volt
PLT-13121	High Bay Occupancy Sensor and Photocell - Passive Infrared (PIR) - White - Screw-In Connector - 12 Volt
PLTS-12281	Motion Sensor Remote

## MOUNTING ACCESSORIES

SKU	Description
PLTS-12377	Adjustable U-Bracket - White
PLTS-12378	Adjustable U-Bracket - Black

## DIMENSIONS

### 150W DIMENSIONS

Height w/ ring mount – 5.7"


Height w/ bracket – 7.20"

Diameter – 11.22"

Weight w/ ring mount – 3.97 lbs

Weight w/ bracket – 5.29 lbs

Ring Mount Thread Size – 10MM

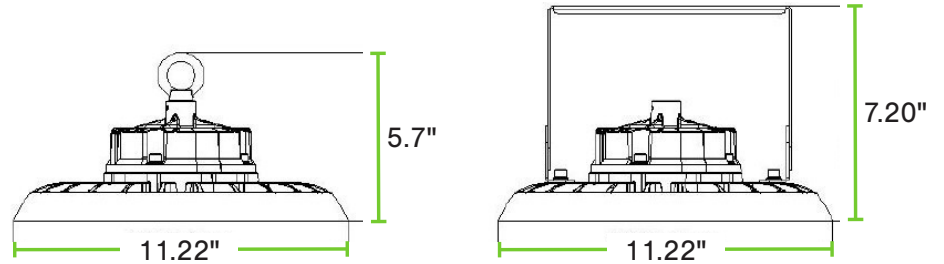

## PHOTOMETRICS

Luminous Intensity Distribution Curve

