



# PLT-50324 -- Double Face LED Combination Exit Sign

## FEATURE

- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating.
- Innovative, easy installation in minutes.
- Letters 6" height with 3/4" stroke. Optional RED or GREEN letters.
- SALIDA faceplate available\*.
- Single or double face (Universal)
- Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation.
- 2X8pcs ultra bright 2835 SMT LED lamp heads for emergency mode.
- Built-in 3.6V1200mAh NI-MH battery for minimum 90 minutes emergency operation.(PLT-50324)
- Built-in 3.6V2400mAh NI-MH battery for minimum 90 minutes emergency operation. (JLEC2BCWRC,Remote capability up to 3W)\*
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL listed.
- 0° to 40° C indoor damp location listed.

\*Available via Special Order. Please call 1-800-624-4488.

FAMILY:

NOTES:



TYPE:



**RED&GREEN EXIT 2in1**  
**Bi-Color Red /Green LED's**

## PACKING INFORMATION

MODEL NO.	PACKING INFORMATION	WEIGHTS
PLT-50324	50x44x38.5cm/6pcs	11.3/10.3kgs
NPS-00250*	50x44x38.5cm/6pcs	11.4/10.4kgs

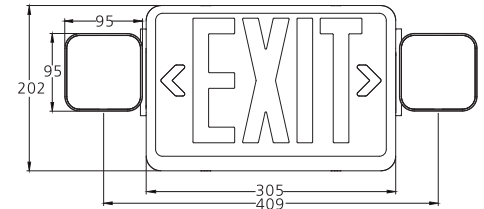

## ELECTRICAL INFORMATION

MODEL	RATED VOLTAGE	INPUT CURRENT	INPUT WATT	LED TYPE	CHARGING TIME	EMERGENCY RUN TIME
PLT-50324	120/277V	0.031/0.016A	3.5W	2x8pcs ultra bright 2835 SMT LED lamp	24 Hrs	90 Mins
NPS-00250*	120/277V	0.032/0.017A	4W	2x8pcs ultra bright 2835 SMT LED lamp+3W Remote Load	24 Hrs	90 Mins

\*Available via Special Order. Please call 1-800-624-4488.