



Double Face LED Combination Exit Sign

FEATURE

- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating.
- Innovative, easy installation in minutes.
- Letters 6" height with 3/4" stroke. Optional RED or GREEN letters.
- SALIDA faceplate available.*
- Single or double face (Universal)
- Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation.
- 2X8pcs ultra bright 2835 SMT LED lamp heads for emergency mode.
- Built-in 9.6V600mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Built-in 9.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation. Also remote capable up to 3W.*
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL listed.
- 0° to 40° C indoor damp location listed.

*Available via Special Order. Please call 1-800-624-4488.

FAMILY:



NOTES:

TYPE:



PACKING INFORMATION

MODEL NO.	PACKING INFORMATION	WEIGHTS
PLT-50330	50x44x38.5cm/6pcs	11.4/10.4kgs
PLT-50331	50x44x38.5cm/6pcs	11.4/10.4kgs
NPS-00252**	50x44x38.5cm/6pcs	11.6/10.6kgs
NPS-00253**	50x44x38.5cm/6pcs	11.6/10.6kgs

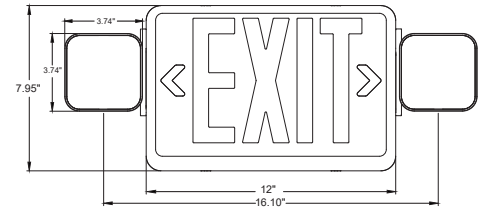

ELECTRICAL INFORMATION

MODEL	RATED VOLTAGE	INPUT CURRENT	INPUT WATT	LED TYPE	CHARGING TIME	EMERGENCY RUN TIME
PLT-50330	120/277V	0.07/0.05A	4.2W**	2x8pcs ultra bright 2835 SMT LED lamp	24 Hrs	90 Mins
PLT-50331	120/277V	0.07/0.05A	4.2W**	2x8pcs ultra bright 2835 SMT LED lamp	24 Hrs	90 Mins
NPS-00252**	120/277V	0.07/0.05A	4.2W	2x8pcs ultra bright 2835 SMT LED lamp+3W Remote Load	24 Hrs	90 Mins
NPS-00253**	120/277V	0.07/0.05A	4.2W	2x8pcs ultra bright 2835 SMT LED lamp+3W Remote Load	24 Hrs	90 Mins

*Available via Special Order. Please call 1-800-624-4488.

**Non-emergency mode. In emergency mode, the fixture uses 12 Watts.