



Waterproof LED Emergency Light



FAMILY:

NOTES:

TYPE:

FEATURE

- Injection-molded thermoplastic ABS housing and polycarbonate cover, UL 94V-0 flame rating.
- Innovative, easy installation in minutes
- Suitable for wall and ceiling mount applications
- Universal J-box mounting pattern
- 120V/277VAC Dual voltage operation
- 2X12pcs Super bright 2835 0.5W LED lamp heads for emergency mode, provide more than 400Lm output.
- Built-in 3.6V2000mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- UL Wet location listed; IP65 waterproof
- 0° to 40°C; outdoor damp location listed

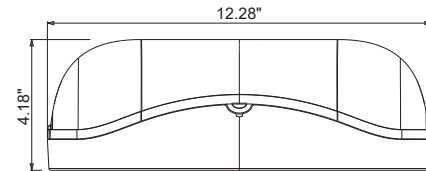

PACKING INFORMATION

MODEL NO.	PACKING INFORMATION	WEIGHTS
PLT-50332	45.2x34x27.5cm/6pcs	7.2/6.2kgs

ELECTRICAL INFORMATION

MODEL	RATED VOLTAGE	INPUT CURRENT	INPUT WATT	LED TYPE	CHARGING TIME	EMERGENCY RUN TIME	IP GRADE
PLT-50332	120/277V	0.025/0.010A	2.4W*	2x12pcs ultra bright 2835 SMT LED lamp	24 Hrs	90 Mins	IP65

*Non-emergency mode. In emergency mode, the fixture uses 1 Watt.