



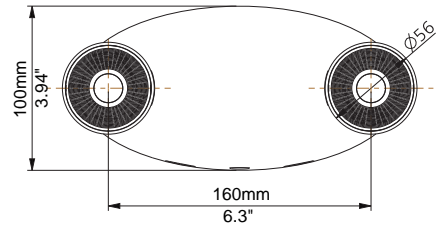

# PLT-50328 -- LED Emergency Light w/ Round LED Lamp Heads

FAMILY:
NOTES:
TYPE:

FEATURE
■ Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating.
■ Innovative, easy installation in minutes.
■ Suitable for wall mount applications.
■ Universal J-box mounting pattern.
■ 120V/277VAC Dual voltage operation.
■ 2X 1W ultra bright LED lamp heads for emergency mode.
■ Luminous Flux: more than 200 LM.
■ Built-in 3.6V1000mAh Nickel cadmium battery for minimum
■ 90 minutes emergency operation.
■ Maximum 24 hours for full recharge time.
■ Test switch and charge indicator.
■ UL listed.
■ 0° to 40° C indoor damp location listed.

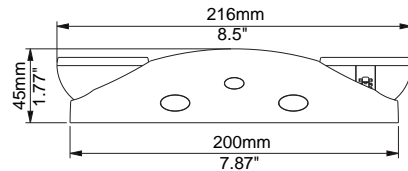

PACKING INFORMATION		
MODEL NO.	PACKING INFORMATION	WEIGHTS
PLT-50328	35.5x24.5x23cm/12pcs	4.4/3.9kgs

ELECTRICAL INFORMATION							
MODEL	RATED VOLTAGE	INPUT CURRENT	INPUT WATT	LED TYPE	BATTERY	CHARGING TIME	EMERGENCY RUN TIME
PLT-50328	120/277V	0.1/0.075A	0.88W*	2x1W ultra bright LED lamp	3.6V 1Ah Ni-cd	24 Hrs	90 Mins

\*Non-emergency mode. When in emergency mode, the fixture uses 2 Watts.