



DESCRIPTION

Featuring selectable wattage and color temperatures that allow you to adjust the light output as needed, this LED wall pack has two rotatable LED panels that allow you to aim the light exactly where needed.

FEATURES

- Delivers up to 161 LPW depending on the wattage selected; see Selectable Table for full breakdown
- Optics rotate 350 degrees
- Replaces 175-250W metal halide fixtures
- 0-10V dimming
- Wattage and color temperature are adjusted via switches inside of fixture; see installation instructions for more information.

LISTINGS

- IP65 Rated
- UL Listed for wet locations

PERFORMANCE

- CRI: 70+
- CCT: 3000K, 4000K, and 5000K
- Rated Lifetime L70: 100,000 hours
- Seoul Semiconductor LEDs

ELECTRICAL

- THD: ≤ 20%
- Power Factor: ≥ 0.9
- Input Voltage: 120-277V

THERMAL

- -22°F to 113°F (-30°C to 45°C) operating temperature

CONSTRUCTION

- Aluminum alloy housing with white finish
- Non-yellowing polycarbonate lens

WARRANTY

- 5-year limited warranty; see pltsolutions.com for warranty details

Project name	Type
Catalog number	
Comments	Voltage
Approved by	Date



APPLICATIONS

- Security Lighting
- Entrance Lighting
- Landscape Lighting
- Up or Down Lighting
- Wall Washing

PERFORMANCE SUMMARY


Item #	Watts*	CRI	CCT*	Lens	Dimming	Voltage	Replaces
PLT-13138	30/ 45/ 60	70+	3000K/4000K/5000K	Polycarbonate	0-10V	120-277V	MH175-250

*See Selectable Table for full breakdown

SELECTABLE TABLE

Wattage	CCT	Lumens	Efficacy
30	3000K	4563	152
	4000K	4845	161
	5000K	4724	157
45	3000K	4724	142
	4000K	6985	152
	5000K	6751	150
60	3000K	7270	121
	4000K	8580	143
	5000K	7676	128

DIMENSIONS

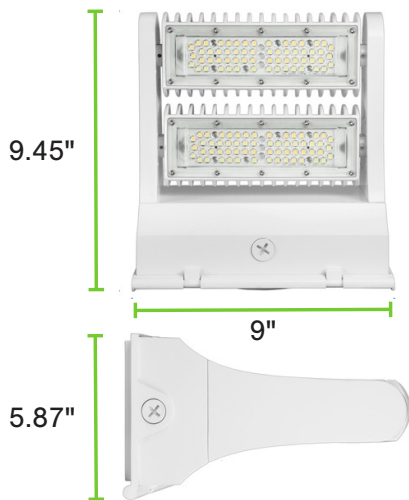

Length: 9"
 Height: 9.45"
 Width: 5.87"
 Weight: 5.5 lb

PHOTOMETRICS

Luminous Intensity Distribution Curve

