





# Selectable UFO LED High Bay



## TOP feature

- Tool-free rotating lens to adjust the beam angle
- Field-adjustable Power.
- 12V Aux and sensor receptacle available.\*
- EM solution ready.\*



## Specifications

### UL Listing:

Suitable for wet locations

### LEDs:

Long-life, high-efficacy, micro-power LEDs

### Lifespan:

Lumen Maintenance, L70 > 100,000 hours

### Ambient Operating Temperature:

-40°C/-40°F to 50°C /122°F

### Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems.

### Surge Protection:

6kV Common Mode and 6kV Differential Mode.

### Housing:


Aluminum Die Cast, long lasting black with high durability. IK09, IP65

### Beam Angles:

Adjustable to 65°, 90°, or 110°

## Dimensions

Size unit: inch(mm)

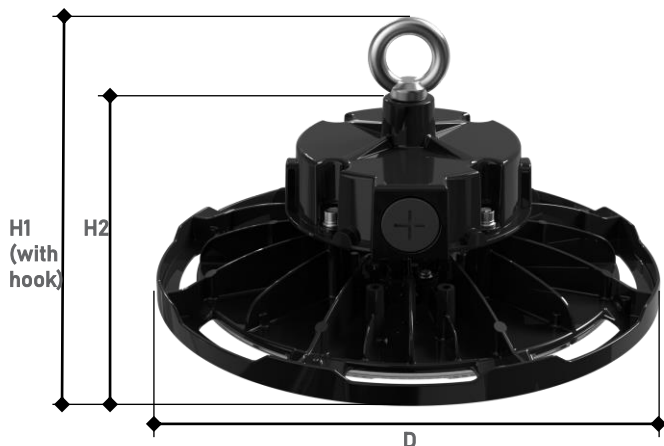

Size	D260	D300	D340	D390
Diameter, D	10.2(260)	11.8(300)	13.4(340)	15.4(390)
Height 1, H1	6.1(154)	6.1(154)	6.5(164)	6.9(164)
Height 2, H2	4.3(110)	4.3(110)	4.7(120)	5.2(120)

# Performance

Field-adjustable Power and fixed CCT, 145LPW

Size	Catalog No.	Watts Rated	Lumens Rated@4000K	Lumens Rated@5000K
D260	NPS-00298*	100	14,500	14,500
		85	12,325	12,325
		70	10,150	10,150
	PLT-80059	150	21,750	21,750
		120	17,400	17,400
		85	12,325	12,325
D300	NPS-00299*	200	29,000	29,000
		160	23,200	23,200
		115	16,675	16,675
D340	PLT-80060	240	34,800	34,800
		190	27,550	27,550
		140	20,300	20,300
D390	PLT-80061	320	46,400	44,800
		280	40,600	39,200
		240	34,800	33,600

## Mounting Accessories



Metal Ring Hanger (included)



Yoke mount bracket\*




Stainless steel spring hook\*




Pendant Mounting Kit\*



Metal shade reflector\*



Poly carbonate shade reflector\*



Wire guards\*

\*Available via Special Order. Please call 1-800-624-4488.