




LED Wraparound Fixtures



130LPW.

Field-adjustable Power and CCT.

Sensor ready*



Specifications

UL Listing:

Suitable for damp locations

LEDs:

Long-life, high-efficacy, micro-power LEDs

Lifespan:

Lumen Maintenance, L70 > 100,000 hours

Housing and Lens:

Steel sheet, Frosted PMMA lens

Finish:

Long lasting white with high durability

Ambient Operating Temperature:

-20°C (-4°F) to 50°C (122°F)

Driver:

Driver includes dimming control wiring for 0-10V dimming systems. The dim-to-off voltage threshold of optional 12V AUX integrated driver ranges from 0.1V to 0.5V.

Surge Protection:

2kV

Mounting:

- Surface mounting (standard)
- Suspended mounting*

Dimensions

2FT*

24.5(622)

2.8(71)

Size unit: inch(mm)




Product net weight: 3.42lb(1.55kg)




4FT

47.7(1212)

2.8(71)

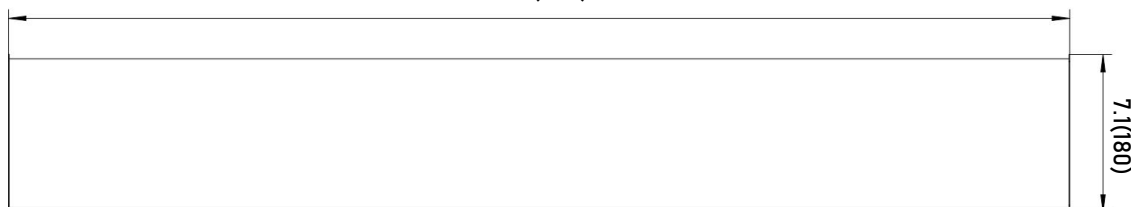




Product net weight: 5.84lb(2.65kg)



*Available via Special order. Call 1-800-624-4488

Performance

Product series	Catalog No.	Input Wattage	CCT	Lumens Rated	Efficacy Rated
Fixed Power and CCT	NPS-00300*	25	Fixed	3250	130
	NPS-00301*	22	Fixed	2860	130
	NPS-00302*	34	Fixed	4420	130
	NPS-00303*	40	Fixed	5200	130
Field-adjustable Power 	NPS-00304*	40	Fixed	5200	130
		35	Fixed	4585	131
		30	Fixed	3960	132
Field-adjustable Power and CCT  	PLT-80056	40	3500K	5200	130
			4000K	5280	132
			5000K	5240	131
		35	3500K	4655	133
			4000K	4725	135
			5000K	4690	134
		30	3500K	4080	136
			4000K	4140	138
			5000K	4110	137

Please contact sales for other Power and CCT requirements.

**Available via Special order. Call 1-800-624-4488*