



---

# Static and Selectable LED WRAPAROUNDS



## Product Features

These wrap fixtures are designed to save energy and meet low light egress requirements. They are ideal for use in stairways, bathrooms, and other lower traffic areas. They are designed with high efficacy LED engines to get the most energy savings compared to fluorescent fixtures.

### Mounting

- Surface Mounting

### Warranty

- 5-year warranty

### Applications

- Offices
- Hallways
- Multipurpose Rooms
- Conference Rooms

## Ordering Information

PLT-80049 -- 16/20/24W, Up to 2808 Lumens, 3500/4000/5000K, 2'

PLT-80050 -- 32/40/48W, Up to 5616 Lumens, 3500/4000/5000K, 4'

PLT-80051 -- 55/60/65W, Up to 7605 Lumens, 3500/4000/5000K, 4'

PLT-80052 - 40W, 4640 Lumens, 4000K, 4'

PLT-80053 - 40W, 4680 Lumens, 5000K, 4'

## DLC Listings

PLT-80049 -- 5.1 Standard - PLTM828142

PLT-80050 -- 5.1 Standard - PLTM849142

PLT-80051 -- 5.1 Standard - PLTM840142

PLT-80052 -- 5.1 Standard - PLTM844122

PLT-80053 -- N/A

## Dimensions:MM

### Specifications



#### PLT WRAP - 2FT/4FT

Length:620/1210(24.4"/47.6")

Width: 134.9(5.3")

Depth:54.4(2.1")

Weight:1.20/1.70(kg)

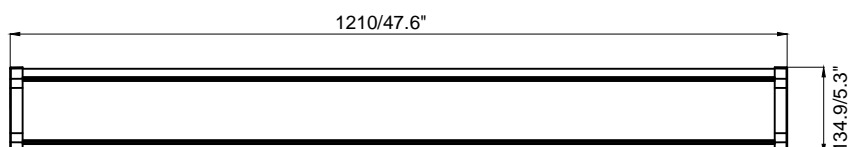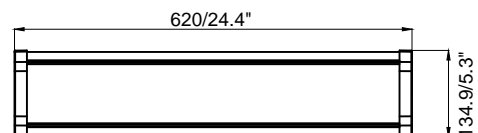

### Ratings

- UL 1598 suitable for damp locations
- UL 8750 LED equipment in Lighting Products
- DLC 5.1 Standard
- Temperature Rated at(-20°C to +50°C)(-4°F to 122°F)

### Additional Features

- 0-10V dimming
- 80 CRI
- Frosted PMMA lens
- Steel housing with white finish
- 2kV surge protection



## Photometric Test List

Catalog No.	Lumens Rated	Watts Rated	Efficacy Rated
NPS-00273*	2300	20	115
NPS-00274*	2320	20	116
NPS-00275*	2340	20	117
NPS-00276*	2300	20	115
NPS-00277*	2320	20	116
NPS-00278*	2340	20	117
NPS-00279*	3680	32	115
NPS-00280*	3712	32	116
NPS-00281*	3744	32	117
NPS-00282*	3680	32	115
NPS-00283*	3712	32	116
NPS-00284*	3744	32	117
NPS-00285*	4600	40	115
NPS-00286*	4640	40	116
NPS-00287*	4680	40	117
NPS-00288*	4600	40	115
PLT-80052	4640	40	116
PLT-80053	4680	40	117
NPS-00291*	5520	48	115
NPS-00292*	5568	48	116
NPS-00293*	5616	48	117
NPS-00294*	5520	48	115
NPS-00295*	5568	48	116
NPS-00296*	5616	48	117

Catalog No.	Lumens Rated	Watts Rated	Efficacy Rated	CCT Range
NPS-00297*	4025	35	115	835-850
	4060	35	116	
	4095	35	117	
	3540	30	118	835-850
	3570	30	119	
	3600	30	120	
	3025	25	121	835-850
	3050	25	122	
	3075	25	123	
PLT-80050	5520	48	115	835-850
	5568	48	116	
	5616	48	117	
	4720	40	118	835-850
	4760	40	119	
	4800	40	120	
	3872	32	121	835-850
3904	32	122		
3936	32	123		
PLT-80051	7475	65	115	835-850
	7540	65	116	
	7605	65	117	
	7080	60	118	835-850
	7140	60	119	
	7200	60	120	
	6655	55	121	835-850
	6710	55	122	
6765	55	123		

SKU	Wattage	CCT	Lumens	Efficacy
PLT-80049	16	3500K	1936	121
		4000K	1952	122
		5000K	1968	123
	20	3500K	2360	118
		4000K	2380	119
		5000K	2400	120
	24	3500K	2760	115
		4000K	2784	116
		5000K	2808	117

Note: Subject to change without notice .Errors and omission excepted. Always make sure to use the most recent release.

