



SELECTABLE LED WRAPAROUND



Product Features

These fixtures are designed to save energy and meet low light egress requirements. Also the fixture is optimal for stairways, bathrooms, and other lower traffic areas. They are designed with high efficacy LED engines to get the most energy savings compared to fluorescent fixtures.

Mounting

- V-Hook ready*
- Surface Mounting

Warranty

- 5-year warranty

Applications

- Offices
- Hallways
- Multipurpose Rooms
- Conference Rooms

Rated Life

- More than 100K hours per L70 TM-21 @ 70 °C

Ratings

- UL 1598 suitable for damp locations
- UL 8750 LED equipment in Lighting Products
- Temperature Rated at(-20°C to +50°C)(-4°F to 122°F)
- The 0-10V Dimming type is continuous
- The product can dim to 10%
- DLC 5.1 Standard

Ordering Information

PLT-80057 -- 25/30/34W, Up to 4488 Lumens, 3500/4000/5000K, 4'

PLT-80058 -- 34/38/45W, Up to 5940 Lumens, 3500/4000/5000K, 4'

*Available via Special Order. Call 1-800-624-4888.

DLC Information

PLT-80057 -- DLC 5.1 Standard - PLTM941142

PLT-80058 -- DLC 5.1 Standard - PLTM942142

Dimensions:MM

Specifications


ETLWRAP04-4FT

Length:1168.6(46.0")

Width: 247.4(9.7")

Depth:86.7(3.4")

Weight:4.30 kg / 7.5 lbs

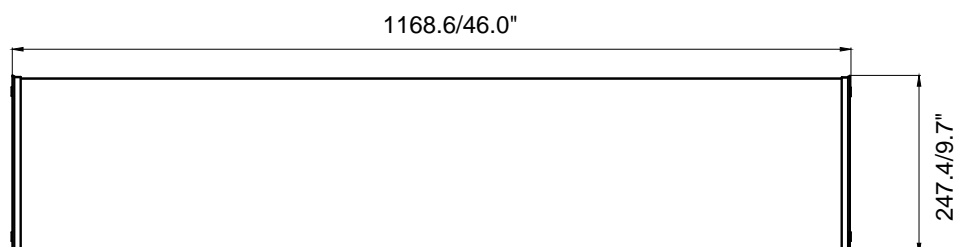

Photometric Test List

Catalog No.	Lumens Rated	Watts Rated	Efficacy Rated	Color Temperature
NPS-00260*	2860	22	130	835
	2882	22	131	840
	2904	22	132	850
NPS-00261*	3960	30	132	835
	4050	30	135	840
	4080	30	136	850
NPS-00262*	5200	40	130	835
	5240	40	131	840
	5280	40	132	850
NPS-00263*	5980	46	130	835
	6026	46	131	840
	6072	46	132	850

Catalog No.	Lumens Rated	Watts Rated	Efficacy Rated	Color Temperature
NPS-00264*	2860	22	130	835
	2882	22	131	840
	2904	22	132	850
NPS-00265*	3900	30	130	835
	3930	30	131	840
	3960	30	132	850
NPS-00266*	5200	40	130	835
	5240	40	131	840
	5280	40	132	850
NPS-00267*	5980	46	130	835
	6026	46	131	840
	6072	46	132	850

Catalog No.	Lumens Rated	Watts Rated	Efficacy Rated	Color Temperature
NPS-00268*	5980	46	130	835
	5240	40	131	
	3960	30	132	
	6118	46	133	840
	5360	40	134	
	4050	30	135	
	6256	46	136	
	5480	40	137	850
	4140	30	138	

Catalog No.	Lumens Rated	Watts Rated	Efficacy Rated	Color Temperature
NPS-00269*	5980	46	130	835
	5240	40	131	
	3960	30	132	
	6118	46	133	840
	5360	40	134	
	4050	30	135	
	6256	46	136	
	5480	40	137	850
	4140	30	138	

Catalog No.	Lumens Rated	Watts Rated	Efficacy Rated	CCT Range
PLT-80057	4420	34	130	3500K
	4050	34	132	4000K
	4454	34	131	5000K
	3990	30	133	3500K
	4050	30	135	4000K
	4020	30	134	5000K
	3400	25	136	3500K
	3450	25	138	4000K
	3425	25	137	5000K
	NPS-00270*	5200	40	130
5240		40	131	
5280		40	132	
4522		34	133	835-850
4556		34	134	
4590		34	135	
3808		28	136	835-850
3836		28	137	
3864	28	138		
PLT-80058	5850	45	130	3500K
	5940	45	132	4000K
	5895	45	131	5000K
	5054	38	133	3500K
	5130	38	135	4000K
	5092	38	134	5000K
	4624	34	136	3500K
	4692	34	138	4000K
	4658	34	137	5000K

Catalog No.	Lumens Rated	Watts Rated	Efficacy Rated	CCT Range
NPS-00271*	4420	34	130	835-850
	4454	34	131	
	4488	34	132	
	3990	30	133	835-850
	4020	30	134	
	4050	30	135	
	3400	25	136	835-850
	3425	25	137	
	3450	25	138	
	5850	45	130	
5895	45	131		
5940	45	132		
NPS-00272*	5054	38	133	835-850
	5092	38	134	
	5130	38	135	
	4624	34	136	835-850
	4658	34	137	
	4692	34	138	

*Available via Special Order. Call 1-800-624-4888.

