



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

## Cass LED Pendant CSSP Series

### Features

This pendant features four-sided illumination with a white acrylic diffuser. Includes a 9 ft. adjustable cord. For use in kitchen, dining, foyers or anywhere general lighting is needed. Provides lighting in residential, commercial and hospitality applications. This fixture mounts to a standard junction box (not included).



### Construction

Extruded aluminum housing. The canopy fits over a standard junction box. Power supply connections must be made inside a junction box (not included).

### Finish

Black (Black cord), Gold (Clear cord) or Satin Nickel (Clear cord) finish.

### Diffuser

White acrylic diffuser.

### Electrical

Input 120 VAC 60 HZ.  
Compatible with TRIAC and ELV dimmers.

### LED

Integrated LED modules capable of producing:  
 15W = 1800 source lumens, 990 delivered lumens  
 25W = 2400 source lumens, 1600 delivered lumens  
 36W = 4000 source lumens, 2600 delivered lumens  
 40W = 4000 source lumens, 2750 delivered lumens  
 3000K (CCT). Rated for 50,000 Hrs., 90 CRI.


### Certification

All fixtures are cETLus listed for indoor damp locations.  
Title 24/JA8 compliant.

### Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 year from date of purchase.

**Specifications and dimensions**  
subject to change without notice.

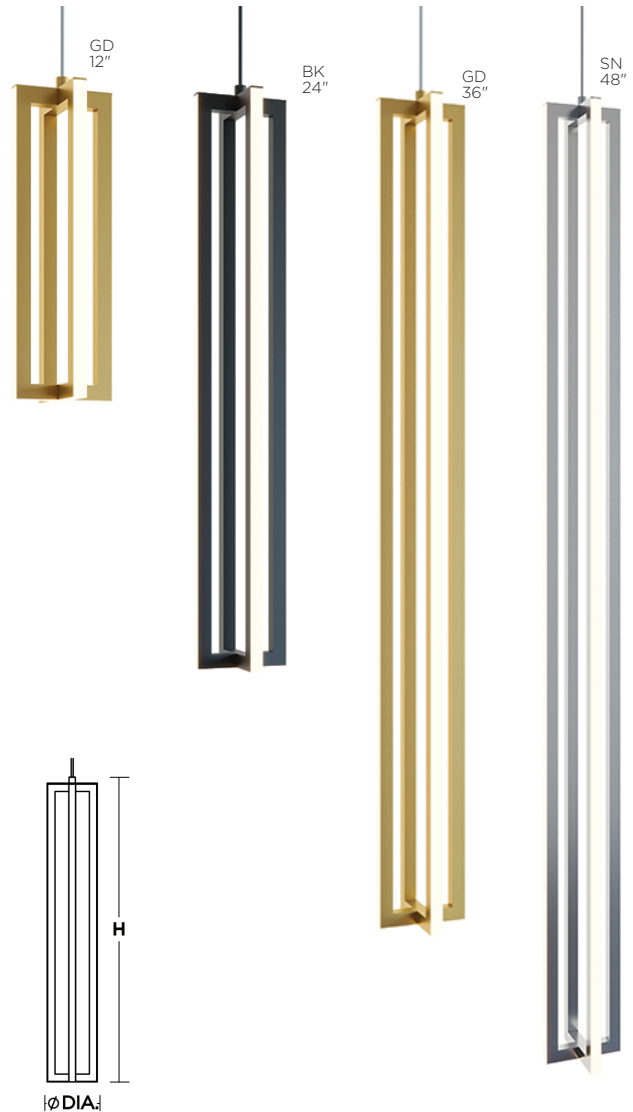

## Ordering Information:

Black	Gold	Satin Nickel	LED	Source Lumens	Delivered Lumens	CCT	H	DIA.
CSSP12L30D1BK	CSSP12L30D1GD	CSSP12L30D1SN	15W	1800	990	3000K	12"	4"
CSSP24L30D1BK	CSSP24L30D1GD	CSSP24L30D1SN	25W	2400	1600	3000K	24"	4"
CSSP36L30D1BK	CSSP36L30D1GD	CSSP36L30D1SN	36W	4000	2600	3000K	36"	4"
CSSP48L30D1BK	CSSP48L30D1GD	CSSP48L30D1SN	40W	4000	2750	3000K	48"	4"