

lampar **ARCH**

LLHB | Apollo

Quicksheet

110W — 400W




Project Details

Project Name:

Fixture Schedule:

Project Number:

Notes:

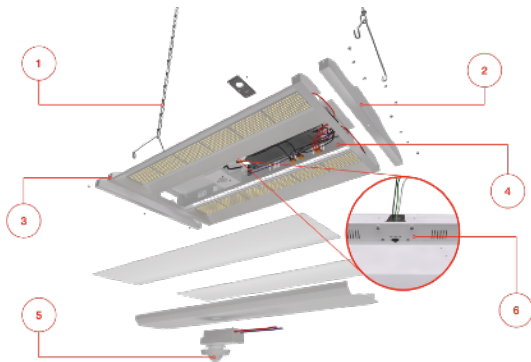

Model Specifications

Model	Watt (W)	Lumens (LM)	Voltage (V)	CCTselect	Replaces
LLHB2110	110W	15,000LM	120-277V	3500K 4000K 5000K	400W MH
LLHB2130	130W	16,640LM			400W MH
LLHB2160	160W	21,120LM			800W MH
LLHB4255	255W	33,150LM			1300W MH
LLHB4300	300W	36,600LM			1500W MH
LLHB4400	400W	48,800LM			2000W MH

Ordering Guide

Model Series	Length (FT)	Watt (W)	CCT (K)	Voltage (V)	Motion Sensor	EM Driver
LLHB (LED Linear High-Bay)	2 2FT	110 110W 130 130W 160 160W	-xx CCTselect: 3500K 4000K 5000K	-U2 120-277V	Blank None -I1 PIR -SR1 Microwave -SBR1 BTLE	Blank None -EM30 30W
	4 4FT	255 255W 300 300W 400 400W				

Ordering number example:

LLHB4255-xx-U2-SR1-EM30

Please place dashes (-) in correct order.

Choose your model specifications:

Model Series	Length	Watt	CCT	Voltage	Sensor	EM

Physical Features

1. Suspension S-hook cables (included)
2. Steel housing, suitable for pendant and surface mount
3. Threaded conduit holes for easier end-to-end wiring
4. Optional EM driver for up to 90min w/out line-in power
5. Optional PIR/microwave/NLC-sensors (see blue ARCH)
6. CCTselect dip-switch for versatile in-field installation

Certifications



Applications



Warehouse



Gym



Industrial



Retail

Product Warranty *



7-Year



75,000 Hrs

* Standard warranty. Extended warranty available.