

lampar **ARCH**

# LLHB | Titan-II

Quicksheet

**85W — 400W**


## Project Details

Project Name:

Fixture Schedule:

Project Number:

Notes:

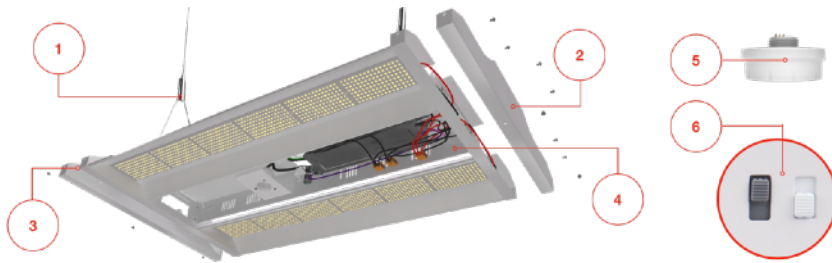

## Physical Features

1. Suspension aircraft cables, comes standard.
2. Anti-rust steel housing with advanced thermal management.
3. Threaded conduit supports threaded throughput wires from conduit holes for easier end-to-end wiring connections.
4. Optional emergency driver with up to 90min without line-voltage power.
5. Optional microwave/PIR motion sensor for security and energy savings.
6. CCTselect dip-switch choose between 4000K, or 5000K..

## Model Specifications

Model	Watt (W)	Lumens (LM)	Efficacy (lm/W)	CCTselect (K)	Voltage (V)
LLHB155-2CS-UT	85W	12,750lm	150lm/W	4000K 5000K	120-277V 277-480V
	130W	19,500lm	150lm/W		
	155W	23,250lm	150lm/W		
LLHB320-2CS-UT	210W	31,710lm	151lm/W		
	255W	38,505lm	151lm/W		
	320W	48,320lm	151lm/W		
LLHB400-2CS-UT	330W	50,490lm	153lm/W		
	360W	55,080lm	153lm/W		
	400W	61,200lm	153lm/W		

## Certifications



## Applications



## Highlights



## Product Warranty \*



\* Standard warranty. Extended warranty available.

## Ordering Guide

Model Series	Watt (W)	CCT (K)	Voltage (V)	Product Series
<b>LLHB</b> LED Linear High-Bay	<b>155</b>   155W Max <b>320</b>   320W Max <b>400</b>   400W Max	<b>-2CS</b>   2-CCTselect: 4000K 5000K	<b>-U</b>   120-277V <sup>1</sup> <b>-H</b>   277-480V <sup>2</sup>	<b>T</b>   Titan-II

### Choose your model specifications:

LLHB	400	-2CS	-U	T	/EM20	/NLC	/325	/WG400	/SPM
Model Series	Watt	CCT	Voltage	Product Series	(2) EM	(1) Sensor	(3) Step-Down	(4) Wire Guard	(5) Mounts

### Ordering number example:

LLHB400-2CS-UT/EM20/NLC/325/WG400/SPM

Please place dashes (-) and forward slashes (/) for optional accessories in the correct order.

