



Back-lit LED Troffer Fixture



2x4*

2x2

1x4*



Top features

- 125 lm/W or 110 lm/W.
- Low profile
- Architectural recessed lighting solution
- Compatible with Battery Backup*

Specifications and accessories

UL Listing:

Suitable for damp locations.

LEDs:

Long-life, high-efficacy, micro-power LEDs

Lifespan:

Lumen Maintenance, L70 > 100,000 hours

Housing:

Cold-rolled steel and extruded aluminum

Lens:

Frosted Polystyrene

Finish:

Long lasting white with high durability

Ambient Operating Temperature:

-20°C (-4°F) to 50°C (122°F)

Driver:

Driver includes dimming control wiring for 0-10V dimming systems. The dim-to-off voltage threshold of optional 12V AUX integrated driver* ranges from 0.1V to 0.5V.

Flicker:

Produces no greater than 30 percent flicker at 200 Hz or below when paired with control devices per CEC Title 24 JA10

Mounting:

Recessed ceiling mounting ready

Surface mounting with optional accessories




Suspended installation with optional accessories

Optional accessories(purchased separately):

- Drywall mount kit*
- Surface mount kit*
- Cable suspending mounting kit*

**Optional accessories & sizes available via Special Order. Call 1-800-624-4488.*

Dimensions

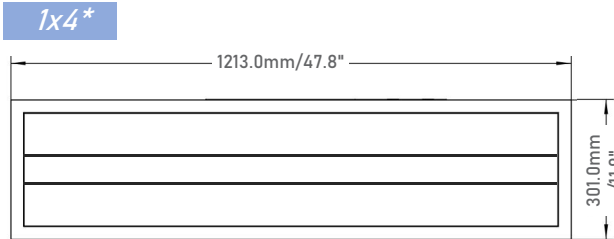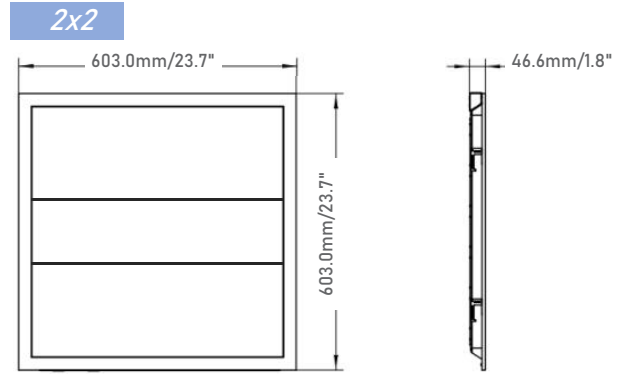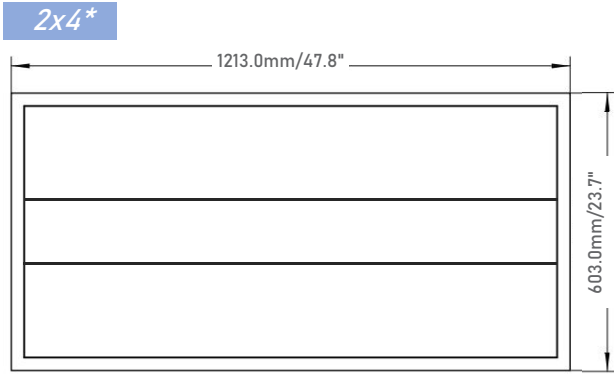

Dimensional tolerance: ±1.0mm

Performance

**Optional sizes & outputs available via Special Order. Call 1-800-624-4488*

	Category	Size	Model NO.	Power	Lumens	Efficacy
	Fixed Power & CCT	1x4	NPS-00369*	28	3500	125
		2x2	NPS-00370*	28	3500	125
			NPS-00371*	36	4500	125
		2x4	NPS-00372*	36	4500	125
NPS-00373*	46		5750	125		

	Category	Size	Model NO.	Power	Lumens*	Efficacy*	
	Field-adjustable Power & CCT	1x4	NPS-00374*	30	3750	125	
				25	3200	128	
				20	2620	131	
		2x2	NPS-00375*	30	3750	125	
				25	3200	128	
				20	2620	131	
			2x4	NPS-00376*	40	5000	125
					35	4480	128
					30	3930	131
2x4	NPS-00377*	46	5750	125			
		40	5120	128			
		35	4585	131			
	Field-adjustable Power & CCT	1x4	NPS-00378*	35	3850	110	
				30	3390	113	
				25	2900	116	
2x2		PLT-90410	35	3850	110		
			30	3390	113		
			25	2900	116		
2x4		NPS-00379*	50	5500	110		
			40	4520	113		
			30	3480	116		

*Rated value @3500K