



LED Stairwell Fixtures



Product Features

The small size of these fixtures make them an ideal choice for size restricted architectural applications. These LED stairwell fixtures can be the illumination solution in commercial, industrial, retail and residential applications. Fixtures can be used in storage/utility areas, coves, display cases, shops, task and general area lighting.

Mounting

- Wall Mounting

Warranty

- 5-year warranty

Applications

- Offices
- Hallways
- Multipurpose Rooms
- Conference Rooms

Rated Life

- More than 100K hours per L70 TM-21 @ 70 °C

Ratings

- UL 1598 suitable for damp locations
- UL 8750 LED equipment in Lighting Products
- Temperature Rated at(-20°C to +50°C)(-4°F to 122°F)
- The 0-10V Dimming type is continuous
- The product can dim to 10%

Ordering Information

PLT-90417: 4', 35/45/55W, 35/40/50K, Up to 6765 Lumens, Integrated Motion Sensor

PLT-90418: 4' 35/45/55W, 35/40/50K, Up to 6765 Lumens, Integrated Motion Sensor, Emergency Backup

Emergency Backup Information

Emergency Operation - 90 Minutes
Recharge Time - 24 Hours Emergency
Power - 15W
Self & Manual Testing - Yes

Integrated Motion Sensor Information

Default Settings:

- Trim Level - 100%
- Hold Time - 1 min
- Then - OFF

Dimensions:MM

Specifications


ETLSTW-2FT*/4FT

Length:608/1216(23.9"/47.9")

Width: 124.1(4.9")

Depth:142.6(5.6")

Weight:1.8/3.65(kg)

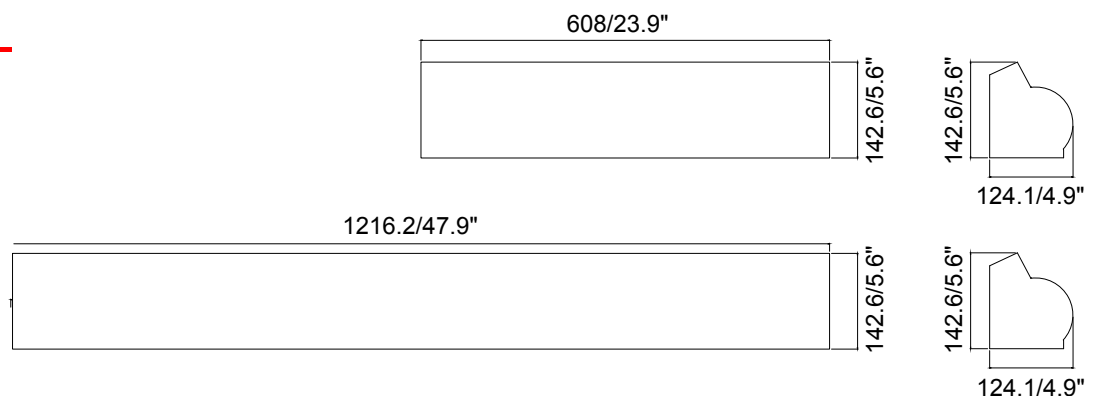

*2' options available via Special Order. Call 1-800-624-4488.

Photometric Test List

Catalog No.	Lumens Rated	Watts Rated	Efficacy Rated	CCT Range
NPS-00380*	2160	18	120	835
NPS-00381*	2178	18	121	840
NPS-00382*	2196	18	122	850
NPS-00383*	3000	25	120	835
NPS-00384*	3025	25	121	840
NPS-00385*	3050	25	122	850
NPS-00386*	5400	45	120	835
NPS-00387*	5445	45	121	840
NPS-00388*	5490	45	122	850
NPS-00389*	6600	55	120	835
NPS-00390*	6655	55	121	840
NPS-00391*	6710	55	122	850
NPS-00392*	3630	30	121	835-850
	3660	30	122	
	3690	30	123	
	3100	25	124	835-850
	3125	25	125	
	3150	25	126	
	2540	20	127	835-850
	2560	20	128	
	2580	20	129	
NPS-00393*	5445	45	121	835-850
	5490	45	122	
	5535	45	123	
	4340	35	124	835-850
	4375	35	125	
	4410	35	126	
	3810	30	127	835-850
	3840	30	128	
	3870	30	129	
PLT-90417 PLT-90418 (Emergency Backup)	6655	55	121	835-850
	6710	55	122	
	6765	55	123	
	5580	45	124	835-850
	5625	45	125	
	5670	45	126	
	4445	35	127	835-850
	4480	35	128	
	4515	35	129	