



Wattage & Color Selectable LED Strip Fixtures



- Luminous part is integrated and fastened to fixture body by snap-locks.
- End-caps adopt integrated bending technique.
- Field-adjustable light output and CCT
- 0-10V dimming
- Bi-level motion sensor or battery backup available*
- Operating temp range -20°C/-4°F to 50°C /122°F



Benefits You Need

Faster surface mounting or row mounting.
The luminous part can be easily removed when install EM or sensor.*



Make you more impressive

Lens & End-Cap customization is available.
Translucent end-caps and sensor bracket for better visual feeling



Smart is in your hand

Optional plug and play sensors thanks to the U-Smart sensor bracket*.
Both standalone sensor and BLE sensor are available.*



**Optional accessories & features available via Special Order. Call 1-800-624-4488.*

Specifications

UL Listing:
Suitable for damp locations

LEDs:
Long-life, high-efficacy, micro-power LEDs

Lifespan:
Lumen Maintenance, L70 > 100,000 hours

Dimming Driver:
Driver includes dimming control wiring for 0-10V dimming systems. The dim-to-off voltage threshold of optional 12V AUX integrated driver ranges from 0.1V to 0.5V.

Housing:
Sheet metal stamping

Finish:
Long lasting white with high durability

IESNA LM-79 & IESNA LM-80 Testing:
Ever-tie LED luminaires have been tested based on IESNA LM-79 and LM-80 by an third-party laboratory

Mounting:
Surface mounting by screws(not included) is ready, a pair of cover plate of junction box is included.


Optional accessories(purchased separately):

- Surface mounting kit
- Cable suspending mounting kit*
- V-hooks & Chain suspending mounting kit*
- Row connector*
- Right angle connection kit*
- Wire guards, square profile or arc profile optional*


Dimensions and Weights

**Optional accessories, lengths, & widths available via Special Order. Call 1-800-624-4488.*

Length

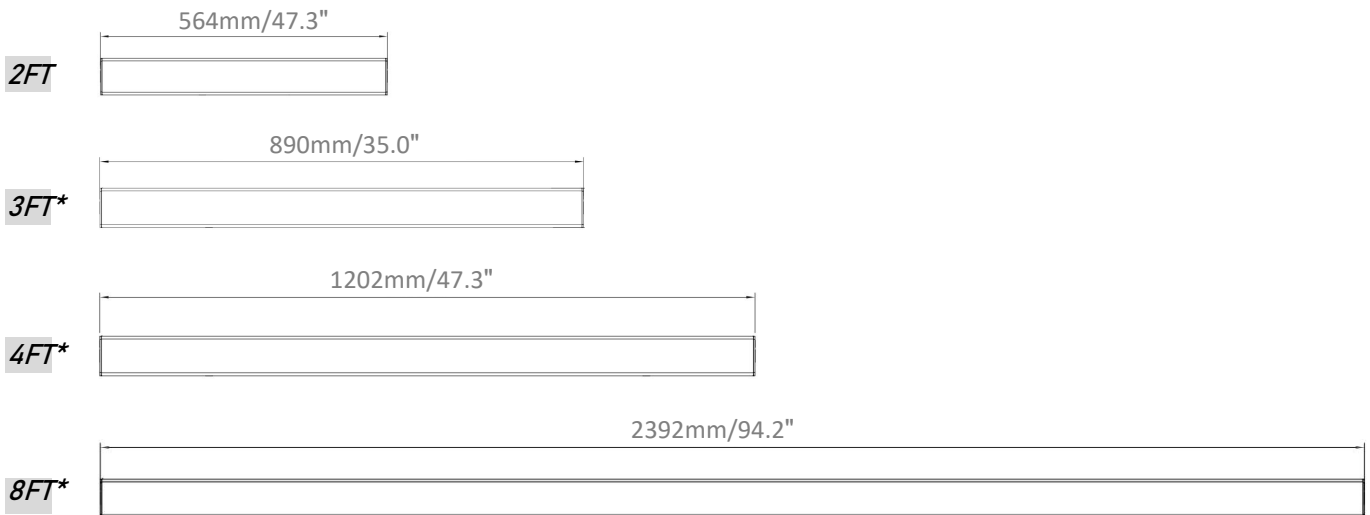

Height and width

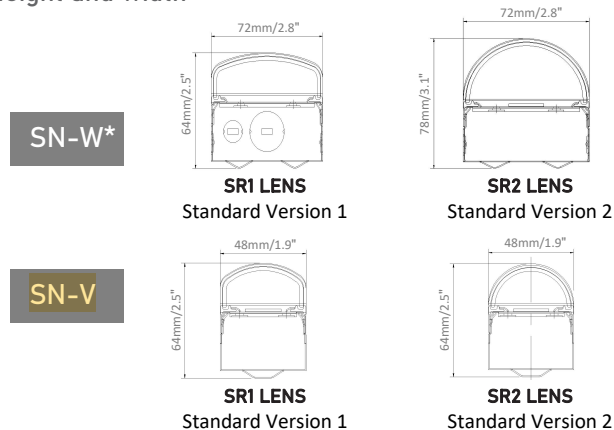

Product Weight(Kg/lb)

Product series	2FT	3FT*	4FT*	8FT*
SN-W*	1.20/2.65	1.60/3.53	2.00/4.41	3.85/8.49
SN-V	1.10/2.43	1.50/3.31	1.65/3.64	3.20/7.05

Performance

Field adjustable Power & CCT

2FT	20W		
	3500k	4000K	5000K
Lumens	2600	2620	2640
Efficacy(lm/W)	130	131	132

Existing field-adjustable power options*:

- 4FT: 45/38/34, 40/30/25, 35/30/25, 30/25/18
- 8FT: 90/75/65, 65/60/55, 54/46/38

Other power values is available.

**Optional length & outputs available via Special Order. Call 1-800-624-4488.*

3FT *	25W		
	3500K	4000K	5000K
Lumens	3250	3275	3300
Efficacy(lm/W)	130	131	132

	15W		
	3500K	4000K	5000K
Lumens	2040	2190	2070
Efficacy (lm/W)	136	146	138

4FT *	30W *			35W *			45W *		
	3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
Lumens	3900	3930	3960	4550	4585	4620	5850	5895	5940
Efficacy(lm/W)	130	131	132	130	131	132	130	131	132

8FT *	65W *			75W *			90W *		
	3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
Lumens	8450	8515	8580	9750	9825	9900	11700	11790	11880
Efficacy(lm/W)	130	131	132	130	131	132	130	131	132

SKU

PLT-90416: 15/20/25W, 35/40/50K, Up to 3250 Lumens