



Gooseneck LED Outdoor Wall Sconce



APPLICATION

Sign lighting, Barn lighting, Awings, Porch Lighting, Patio Lighting



Gooseneck Wall Sconce


PRODUCT FEATURES

3 CCT & WATTAGE SELECTABLE


DIP Switch for Watt & Photocell & CCT



270° VERTICAL ROTATION

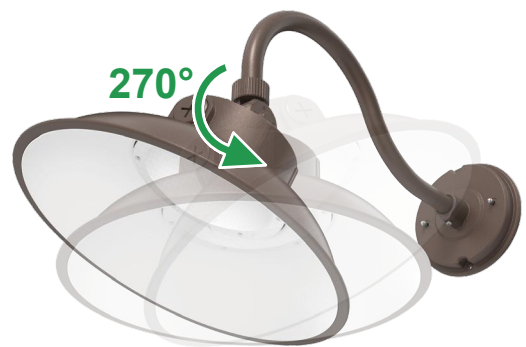

INFRARED SENSOR ONLY DETECT 820-1100NM SUNLIGHT Not affected by other light

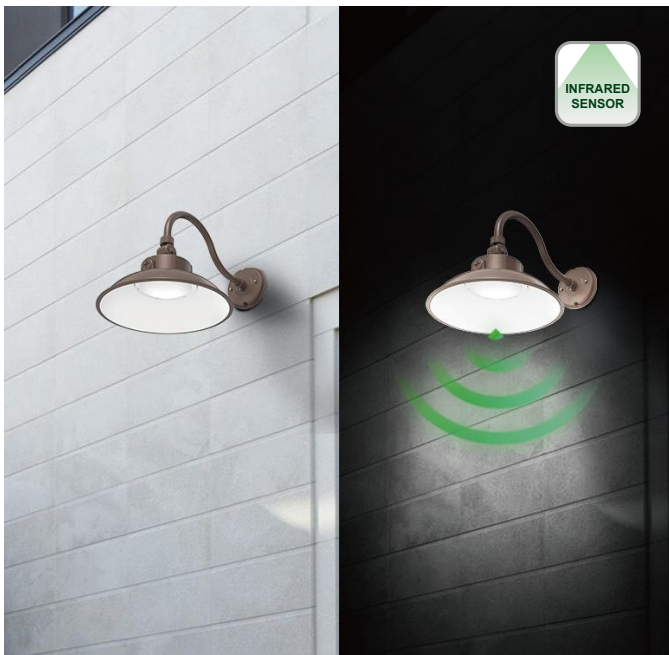

IP65 FOR WET LOCATION USE





Gooseneck Wall Sconce

SPECIFICATIONS

Item#	Power	Input Voltage	Light Efficacy*	Lumen Output* (±5%)	Equivalent	Beam Angle	CCT	Working Temp	Finish	Warranty
PLT-13202	50W 40W 30W	120-277V	130LPW	6500-5200-3900LM	100-150W	Adjustable	3K/4K/5K CCT Tunable	-40°C~+45°C -40°F~+113°F	Bronze	5years
PLT-13203	50W 40W 30W	120-277V	130LPW	6500-5200-3900LM	100-150W	Adjustable	3K/4K/5K CCT Tunable	-40°C~+45°C -40°F~+113°F	Black	5years

*See selectable table for full breakdown.

SELECTABLE TABLE

Wattage	CCT	Lumens	LPW
30W	3000K	4490	150
	4000K	4750	158
	5000K	4640	155
40W	3000K	5460	137
	4000K	5850	146
	5000K	6530	163
50W	3000K	6510	130
	4000K	7150	143
	5000K	6870	137

DIMENSIONS

