

## Linkable LED Linear Strip Light

These linkable linear strip lights are ETL listed. Max linkable watt up to 600W -1200W. Easy and quick installation can greatly cut labor cost, easy to access LED driver design, perfect for applications such as office, parking garages, classrooms ,warehouses, healthcare facilities, shopping malls and more.

- Cold-rolled steel housing,heavy duty
- Frosted polycarbonate lens, glare free
- -20°C (-4°F) up to 45°C (113°F) operating temperature
- Damp location
- 0-10V dimmable
- Optional motion sensor\*
- 2KV surge protection
- PF >0.9
- THD <20%
- Emergency battery backup optional\*
- Five year warranty
- IP20 & IK08


### Certifications



*\*Optional accessories, voltages, and CCTs available via Special Order. Please call 1-800-624-4488.*

Model	Watt	Input Voltage	LPW	Typical Lumen	CCT	CRI	Dimmable	Max Linkable watt	Dimension (Inch)	DLC # & Level
PLT-90479	26W	120-277V/ 120-347V*	146lm/w	3800lm	4000K* / 5000K/ 5700K*	>80	0-10V	600W @120V 1200W @277V	48.26"x2.3"x2.6"	5.1 Standard - PLTSU11111
PLT-90480	31W		164lm/w	5100lm						5.1 Standard - PLTSU54251
PLT-90481	38W		152lm/w	5800lm						5.1 Standard - PLTSU54351
PLT-90482	58W		172lm/w	10000lm						5.1 Standard - PLTSU54451
PLT-90483	80W		150lm/w	12000lm					94.48"x2.3"x2.6"	5.1 Standard - PLTSU58551
PLT-90484	126W		135lm/w	17010lm					5.1 Standard - PLTSU58651	

### Dimensions

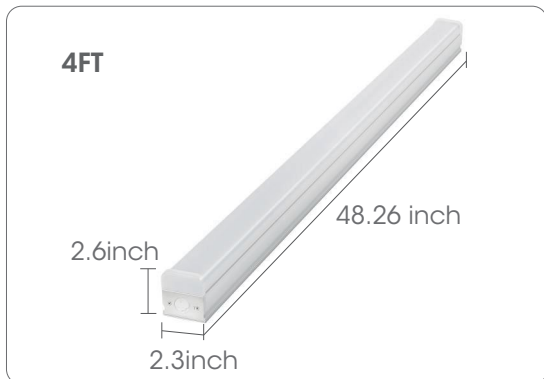

## Accessories

### Surface mount - Standard



Plastic Anchors  
(Included)



Self tapping screws  
(Included)




Mounting clips  
(Included)

### Seamless butt connector - Standard (Included)



### 1FT jumper cable - Optional PLT-90486 (Sold Separately)

1FT



### 1FT power cable - Optional PLT-90487 (Sold Separately)

