



DESCRIPTION

Increase the safety of your stairs, walkways, and pathways by adding foot-level lighting with these mini LED step lights.

FEATURES

- Universal mounting; can be installed either vertically or horizontally
- High color rendering index (CRI) of 90 makes color appear more accurate

LISTINGS

- ETL listed for wet locations
- RoHS

PERFORMANCE

- CRI: 90
- CCT: 3000K
- LED L70 Life Hours: 50,000 hours

THERMAL

- -4°F to 104°F (-20°C to 40°C) operating temperature

ELECTRICAL

- THD: <30%
- Power Factor: >0.9
- Input Voltage: 120VAC

INSTALLATION

- Designed for installation into a single gang receptacle box (not included); see installation instructions for more information.

CONSTRUCTION

- Aluminum construction with black or white finish
- Frosted PMMA lens helps diffuse light output and reduce glare

project name	type
catalog number	
comments	voltage
approved by	date



WARRANTY

- 5-year limited warranty; see pltsolutions.com for warranty details


APPLICATIONS

- Stairs and Stairwells
- Decks
- Hallways
- Covered Walkways

PERFORMANCE SUMMARY

Item #	Watts	Lumens	LPW	CCT	CRI	Voltage	Beam Angle	Dimmable	Mount Position	Finish
PLT-12598	2.5	125	50	3000K	90	120VAC	38°	No	Horizontal or Vertical	Black
PLT-12599	2.5	125	50	3000K	90	120VAC	38°	No	Horizontal or Vertical	White

DIMENSIONS

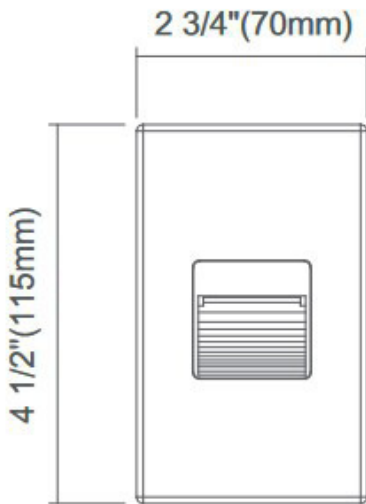


DIMENSIONS


Length: 4.5"
Width: 2.75"
Depth: 2"
Weight: 0.64 lbs

PHOTOMETRICS

PLT-12598

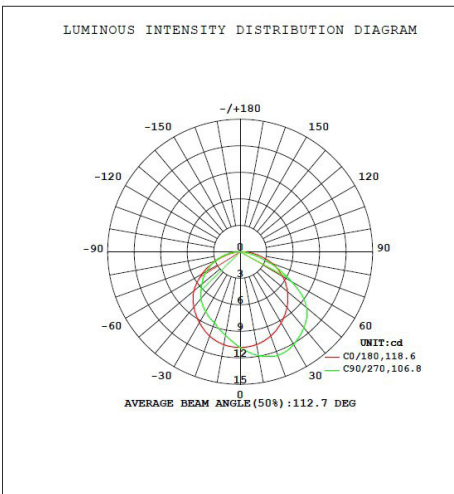

PLT-12599

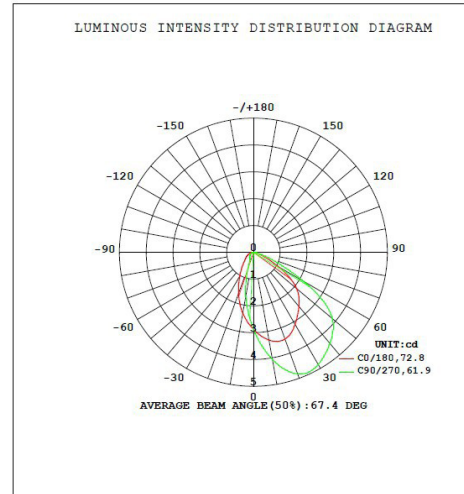

WARNINGS

- Not for use with dimmers.