


How do you LBI?



CONTINUOUS RUN (SUSPENDED MOUNT)*




SUSPENDED IN-LINE BRKT + SEAMLESS CONNECTOR



COVE LIGHTING*



45 DEGREE BRKT/CLIP + SEAMLESS CONNECTOR + LINKING CABLE

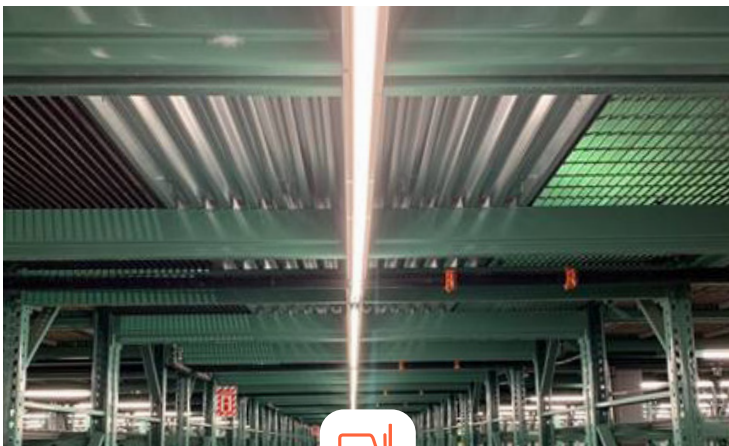

CONTINUOUS RUN (SURFACE MOUNT)*



OC2 SENSOR + SEAMLESS CONNECTOR



CONTINUOUS RUN (T-GRID)*



SEAMLESS CONNECTOR + T-BAR CLIP

* ONE INCOMING POWER KIT IS REQUIRED PER CONTINUOUS RUN OF LBI (RP-LBI-G1-IP-3F-DIM). USED TO HARD WIRE THE INCOMING POWER CABLE INTO FIXTURE OR J-BOX. (SEE PAGE 2 FOR PHOTO AND WHAT'S INCLUDED IN THE KIT)



COOLERS*

SEAMLESS CONNECTOR + LINKING CABLE



SIGN LIGHTING*

LINKING CABLE



UNDER CABINET

2FT INCOMING POWER CABLE W/ SWITCH



STAIRWELL*

OC2 SENSOR + JUNCTION BOX




DISPLAY CASES*

45 DEGREE BRACKET



SCAN FOR A FULL LIST OF LBI ACCESSORIES

INCOMING POWER KIT



INCOMING PWR CABLE / PIGTAIL



SERVICE DISCONNECT



GROMMET

* ONE KIT IS REQUIRED PER CONTINUOUS RUN OF LBI (RP-LBI-G1-IP-3F-DIM). USED TO HARD WIRE THE INCOMING POWER CABLE INTO FIXTURE OR J-BOX.