



## LED Bed Light Up&Down Light

The overbed light was created to enhance the patient experience and support caregiver effectiveness. It offers a modern design to elevate any patient room. Its airplane wing design comes off the wall to maximize the throw of light onto the patient bed for optimal visibility, it supports a calming environment through clean aesthetic and smooth shape.

- Solid seamless body
- High impact PC lens
- Slim and modern design
- Wide range of lighting functions
- Wall mount accessories included
- PF>0.9
- THD<20%
- 5 years warranty

#### Certifications





Input Voltag Dimensions (Inch) LPW\* Night Light: 10W Total: 30W PLT-90469 Up to 128Lm/w Ambient Light: 10W 5.1 Standard PLTSU22111 Up Light: 10W 23.78"x5.39"x3.16" 3063LM Reading Light: 15W Down Light: 0-10-15-20W Examination Light: 20W Night Light: 10W Pull Chains(Standard) Switches(Optional)\*\* Multifunction Switch (Optional)\*\* Up to PLT-90470 4415LM 35.59"x5.39"x3.16" 5.1 Standard - PLTSU23211 Total: 40W AC Receptacle\* CCT Changing 30K/35K/40K 128Lm/w Ambient Light: 10W 120-277V >80 Up Light: 10W USB Charging\* 120-347V Reading Light: 20W Up to • Down Light: 0-10-20-30W PLT-90471 4521LM 47.40"x5.39"x3.16" 5.1 Standard - PLTSU24211 132Lm/w Examination Light: 30W

> \*See Selectable Table pm page 3 for full breakdown. \*\*Additional features available via special order. Call 1-800-624-4488.



## **Optional Accessories**



\*Optional features available via special order. Call 1-800-624-4488.

# **Lighting Functions**



Exam



Reading





Ambient




Night Light

## Dimensions

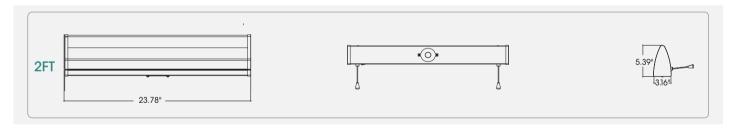







### Selectable Table

			Up Light		Down Light	
SKU	Wattage	ССТ	Lumens	LPW	Lumens	LPW
PLT-90469	10W	3000K	744	74	1242	124
		3500K	812	81	1281	128
		4000K	787	79	1282	128
	15W	3000K	N/A		1826	122
		3500K			1580	105
		4000K			1871	125
	20W	3000K			2269	113
		3500K			2251	113
		4000K			2262	113
	30W*	3000K			3013	100
		3500K			3063	102
		4000K			3049	102
PLT-90470	10W	3000K	737	74	1256	126
		3500K	814	81	1278	128
		4000K	816	82	1263	126
	20W	3000K			2394	120
		3500K			2490	125
		4000K			2412	121
	30W	3000K	1		3563	119
		3500K	N/A		3548	118
		4000K			3599	120
	40W*	3000K			4300	108
		3500K			4362	109
		4000K			4415	110
PLT-90471	10W	3000K	747	74	1270	127
		3500K	823	83	1324	132
		4000K	831	83	1284	128
	20W	3000K			2454	123
		3500K	N/A		2454	123
		4000K			2482	124
	30W	3000K			3597	120
		3500K			3691	123
		4000K			3690	123
	40W*	3000K			4344	109
		3500K			4514	113
		4000K			4521	113

\*Max combined wattage