











LED Bed Light

Up&Down Light

The overbed light was created to enhance the patient experience and support caregiver effectiveness. It offers a modern design to elevate any patient room. Its airplane wing design comes off the wall to maximize the throw of light onto the patient bed for optimal visibility, it supports a calming environment through clean aesthetic and smooth shape.

- Solid seamless body
- High impact PC lens
- Slim and modern design
- Wide range of lighting functions
- Wall mount accessories included
- PF>0.9
- THD<20%
- 5 years warranty

Certifications





Model	Watt*	Input Voltage	LPW*	Typical Lumen*	CCT*	CRI	Auxiliary Functions	Lighting Control	Operating Mode	Dimensions (Inch)
PLT-90469	• Total: 30W	W 120-277V 120-347V		3063LM	415LM CCT Changing 30K/35K/40K	>80	AC Receptacle* USB Charging*	Pull Chains(Standard) Switches(Optional)* Multifunction Switch (Optional)*	Night Light: 10W	23.78"x5.39"x3.16"
	• Up Light: 10W		Up to 128Lm/w						Ambient Light: 10W	
	Down Light:								Reading Light: 15W	
	0-10-15-20W								Examination Light: 20W	
PLT-90470	• Total: 40W • Up Light: 10W • Down Light:		Up to	4415LM					Night Light: 10W	35.59"x5.39"x3.16"
FL1-90470			128Lm/w	44 I 3 E W					Ambient Light: 10W	
DLT 00474			Up to 132Lm/w	4521LM					Reading Light: 20W	47.40"x5.39"x3.16"
PLT-90471	0-10-20-30W								Examination Light: 30W	
NPS-00365**	• Total: 60W			6900LM					Night Light: 20W	
	• Up Light: 20W • Down Light: 0-20-30-40W								Ambient Light: 20W	47.40"x5.39"x3.16"
									Reading Light: 30W	
									Examination Light: 40W	

^{*}See Selectable Table pm page 3 for full breakdown.

^{**}Alternate wattage variations and additional features available via special order. Call 1-800-624-4488.




Optional Accessories



*Optional features available via special order. Call 1-800-624-4488.

Lighting Functions












Ambient

Dimensions

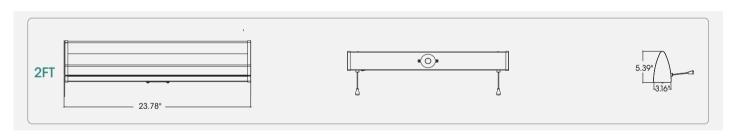

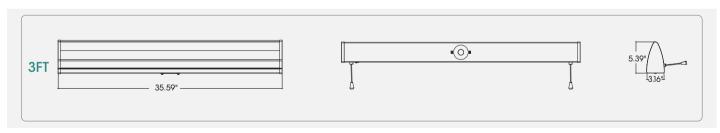

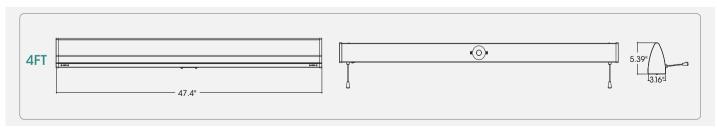



Selectable Table

			Up Light		Down Light	
SKU	Wattage	CCT	Lumens	LPW	Lumens	LPW
		3000K	744	74	1242	124
	10W	3500K	812	81	1281	128
		4000K	787	79	1282	128
		3000K			1826	122
	15W	3500K			1580	105
PLT-90469		4000K			1871	125
PL1-30403		3000K			2269	113
	20W	3500K	N,	/A	2251	113
		4000K			2262	113
		3000K			3013	100
	30W*	3500K			3063	102
		4000K			3049	102
		3000K	737	74	1256	126
	10W	3500K	814	81	1278	128
		4000K	816	82	1263	126
		3000K			2394	120
	20W	3500K			2490	125
PLT-90470		4000K			2412	121
PL1-90470		3000K			3563	119
	30W	3500K	N,	/A	3548	118
		4000K			3599	120
		3000K			4300	108
	40W*	3500K			4362	109
		4000K			4415	110
		3000K	747	74	1270	127
	10W	3500K	823	83	1324	132
		4000K	831	83	1284	128
		3000K			2454	123
PLT-90471	20W	3500K			2454	123
		4000K			2482	124
		3000K			3597	120
	30W	3500K	N,	/A	3691	123
		4000K			3690	123
		3000K	4344			109
	40W*	3500K			4514	113
		4000K			4521	113

*Max combined wattage