



Wattage and Color Selectable LED Mini Wall Pack

DESCRIPTION

Featuring selectable wattage and color temperatures that allow you to adjust the light output as needed, these LED mini wall packs are an efficient choice for improving security lighting in outdoor areas.

FEATURES

- Delivers up to 159 LPW depending on the wattage selected
- Replaces up to 100W metal halide fixtures
- Integrated photocell for dusk till dawn operation
- Wattage and color temperature are adjusted via dip switch inside of fixture; see installation instructions for more information.

LISTINGS

- IP65 Rated
- UL Listed for wet locations
- BUG: B1-U3-G2
- DesignLights Consortium® 5.1 Premium - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance

PERFORMANCE

- CRI: 80+
- CCT: 3000K, 4000K, and 5000K
- Rated Lifetime L70: 50,000 hours
- Philips Lumileds SMD LEDs

ELECTRICAL

- THD: ≤ 20%
- Power Factor: ≥ 0.9
- Input Voltage: 120-277V

THERMAL

- -40°F to 113°F (-40°C to 45°C) operating temperature

CONSTRUCTION

- Die-cast aluminum housing with bronze or white finish
- Polycarbonate lens

WARRANTY

- 5-year limited warranty; see pltsolutions.com for warranty details

Project name	Type
Catalog number	
Comments	Voltage
Approved by	Date



APPLICATIONS

- Security Lighting
- Pedestrian Lighting
- Parking Areas

PERFORMANCE SUMMARY


Item #	Watts*	CRI	CCT*	Lens	Voltage	Replaces	Finish	DLC #	DLC Level
PLT-13362	8/ 10/ 15	80+	3000K/ 4000K/ 5000K	Polycarbonate	120-277V	MH50	Bronze	PLTSN311111W	5.1 Premium
PLT-13363	20/ 25/ 30	80+	3000K/ 4000K/ 5000K	Polycarbonate	120-277V	MH100-150	Bronze	PLTSN321111W	5.1 Premium
PLT-13364	20/ 25/ 30	80+	3000K/ 4000K/ 5000K	Polycarbonate	120-277V	MH100	White	PLTSN321311W	5.1 Premium

*See Selectable Table for full breakdown

SELECTABLE TABLE

SKU	Wattage	CCT	Lumens	Efficacy
PLT-13362	8	3000K	1104	138
		4000K	1131	141
		5000K	1116	140
	10	3000K	1443	144
		4000K	1505	150
		5000K	1480	148
	15	3000K	2129	141
		4000K	2385	159
		5000K	2260	150
PLT-13363	20	3000K	2495	124
		4000K	2671	133
		5000K	2690	134
	25	3000K	3091	123
		4000K	3308	132
		5000K	3332	133
	30	3000K	3724	124
		4000K	3986	132
		5000K	4015	133
PLT-13364	20	3000K	2795	140
		4000K	2936	147
		5000K	2905	145
	25	3000K	3437	138
		4000K	3559	142
		5000K	3418	137
	30	3000K	3947	132
		4000K	4362	145
		5000K	4207	140

DIMENSIONS

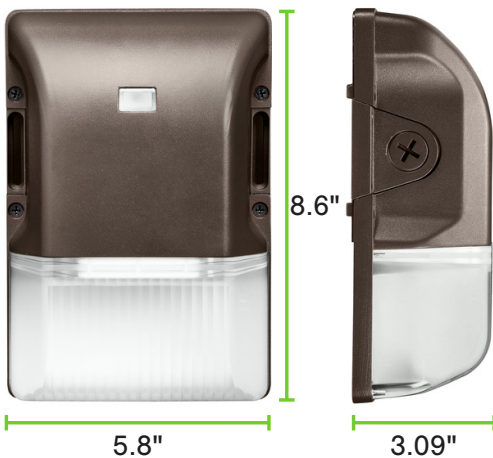

DIMENSIONS

Length – 8.6"

Height – 3.09"

Width – 5.8"

Weight – 1.3 lbs