

VERSA SLIM 1.3"


Pendant | Architectural LED Linear



VERSA series 1.3" linear pendant lighting is a unique linear series that brings any space to the center stage. These timeless, streamlined forms blend well with contemporary decors and modern workplaces. These linear luminaires available in 2ft, 4ft and 8ft* simply provide wide, powerful lighting to any atmosphere with continuous runs. It can provide smooth uplight and downlight, allowing for wider spacing between fixtures and better ceiling light uniformity. Unleash lighting design flexibility with VERSA with different shapes and patterns adding a fun factor into each room. These creations will let you suggest rhythm, communicate meaning and showcase elements of life.

Features

- 2ft, 4ft, and 8ft* lengths, up to 1024 lm/ft
- Available in diffuser, louver*, and drop lens*
- Multiple lighting distributions options
- Individual units or continuous runs
- Custom pattern with optional Line, L*, X*, T*, Y*, V* joiners
- Optional wattage selectable (50%/75%/100%), emergency* and sensor*

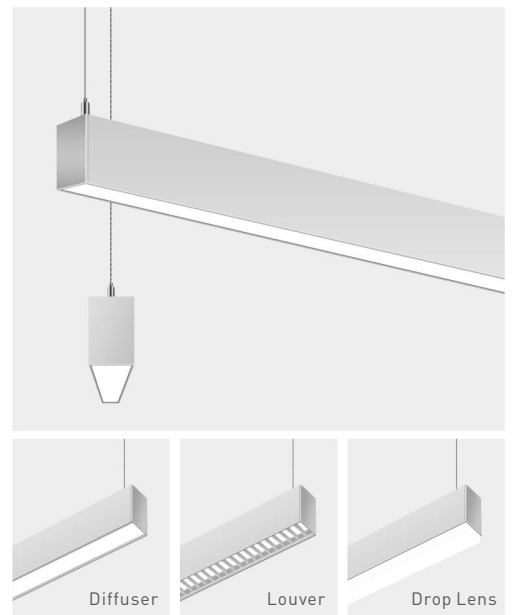

PERFORMANCE

Lens	Length	Wattage Selectable	25% UP/75%DOWN		100%DOWN		CCT Adjustable
			Efficacy	Lumen Output	Efficacy	Lumen Output	
Diffuser	2'	20W/15W/10W	1000lm/ft	1000~200LM	950m/ft	900~1900LM	3000K/3500K/4000K
	4'	40W/30W/20W		1900~3900LM		1800~3700LM	
	8'	80W/60W/40W		3800~7800LM		3600~7400LM	
Louver*	2'	20W/15W/10W	750lm/ft	750~1500LM	700lm/ft	700~1400LM	3000K/3500K/4000K
	4'	40W/30W/20W		1500~3000LM		1400~2800LM	
	8'	80W/60W/40W		3000~6000LM		2800~5600LM	
Drop Lens*	2'	20W/15W/10W	1000lm/ft	1000~2000LM	950lm/ft	950~1900LM	3000K/3500K/4000K
	4'	40W/30W/20W		2000~4000LM		1900~3800LM	
	8'	80W/60W/40W		4000~8000LM		3800~7600LM	

*Optional lenses, joiners, length, and other accessories are available via Special Order. Call 1-800-624-4488.

**All efficacies are +/- 5% based on different CCT's and lighting distributions. Check the IES file to gain accurate data

VERSA SLIM 1.3"

Pendant | Architectural LED Linear



PRODUCT PERFORMANCE

► Optics

It offers a selection of professional lens such as diffuser, louver and drop lens to meet your different requires.

► Finish

- Extruded aluminum housing.
- Powder coat white and black finish or custom.

► Electrical

LED Driver It is powered by Class 2 high efficiency LED driver, with a standard 1-10V dimming which continuous dims to 10% that works with many types of controls. Tested Dimmers: Lutron ® Diva-Dvtv, Leviton ® IP-710-DL.

THD <20%

Power Factor >0.9

Input Voltage Standard electronic drivers are cULus recognized and available for 110-277V or 110-347V*AC

► Mounting

- Pendant-Dry ceiling or T-Grid ceiling* compatible. Cable lengths of 5ft is standard, 12ft or others are available
- Individual or continuous run, up to 40ft in 120VAC, 100ft in 277VAC
- Custom Pattern with optional Line, L, X, T, V, Y joiners.

► LED System

CRI Minimum 90 color rendering index

CCT CCT adjustable from 3000K, 3500K and 4000K with a great color consistency.

Environment Damp rated for ambient operating temperature of -20°C to +40°C (-4° to +104°F)

► Approvals

- ULus listed for damp locations
- **Designed for indoor use only**
- 5 years limited warranty

► Optional Function

Emergency Option* Optional high voltage emergency LED driver can be provided. When AC power fails, it immediately switches to the emergency mode, operating for lighting up to 120 minutes. When AC power is restored, it automatically returns to the charging mode which meets critical life-safety lighting requirements.

For more info or spec sheet, please visit our website or contact sales.

Occupancy Sensor* We can provide a factory-installed integrated sensor system for multi-level control based on motion and/or daylight contribution with BR1810BI-level & daylight harvest microwave sensor from SHARKWARD. For more info or spec sheet, please contact sales.

Wattage Selectable Option* Available to adjust wattage to 100%, 75% and 50 % by dip switch.



*Assorted options available via Special Order. Call 1-800-624-4488.

PRODUCT ORDERING GUIDE

See page 3 for full list of skus.

1. Base Model

ZE VERSA SLIM

2. Length

2 2 feet 4 4 feet 8* 8 feet

3. Width

1 1.3 inch

4. Driver

I Internal

5. CCT

TW CT adjustable from 3000K, 3500K and 4000K

6. Light Distribution

A 2 Lighting Distribution By Dip Switch
25% Up/75% Down, 100% Down

7. Optics Options

D Diffuser R Micro Reflector

L Louver* C Convex*

OPTIONAL ORDERING GUIDE

Ceiling Type

- Dry Wall (Mount to J-box)
- Drop Ceiling Clips (Suitable for 9/16" and 15/16" Flat Ceiling)*
- Drop Ceiling Clips (Suitable for 9/16" Slot Ceiling)*
- Drop Ceiling Clips (Suitable for 15/16" Slot Ceiling)*

Canopy

- Finish:** White Black
- Type:** 1.6" Round 4.5" Round (Designed for power cable)
- 1.6" Square 4.5" Square (Designed for power cable)
- 5.8" Round With Occupancy Sensor (Power Feed)

Joiner

- "—" pattern Rolling Diffuser (42') "X" pattern
- "Y" pattern "L" pattern "V" pattern*
- "T" pattern

Optional Functions

- LED Emergency Driver (Order Separated)
- Occupancy Sensor (Order Separated)

VERSA SLIM 1.3"

Pendant | Architectural LED Linear



SKUS

SKU	Watts*	CCT*	Max Lumen Output	CRI	Voltage	Finish	Lens	Length
PLT-90444	10/15/20W	30/35/40K	2047**	90	120-277V	White	Diffuser	2'
PLT-90445	10/15/20W	30/35/40K	1949**	90	120-277V	Black	Diffuser	2'
PLT-90446	20/30/40W	30/35/40K	3880**	90	120-277V	White	Diffuser	4'
PLT-90447	20/30/40W	30/35/40K	3697**	90	120-277V	Black	Diffuser	4'

****See Selectable Table for full breakdown**

SELECTABLE TABLE



SKU	Wattage	CCT	Lumens	LPW
PLT-90444	10	3000K	1053	105
		3500K	1074	107
		4000K	1080	108
	15	3000K	1498	100
		3500K	1541	103
		4000K	1536	102
	20	3000K	1977	99
		3500K	2047	102
		4000K	2023	101
PLT-90445	10	3000K	996	100
		3500K	1015	102
		4000K	1021	102
	15	3000K	1423	95
		3500K	1462	97
		4000K	1457	97
	20	3000K	1886	94
		3500K	1949	98
		4000K	1926	96
PLT-90446	20	3000K	1978	99
		3500K	2021	101
		4000K	2038	102
	30	3000K	2802	93
		3500K	2888	96
		4000K	2883	96
	40	3000K	3746	94
		3500K	3880	97
		4000K	3833	96
PLT-90447	20	3000K	1902	95
		3500K	1938	97
		4000K	1950	98
	30	3000K	2715	91
		3500K	2792	93
		4000K	2784	93
	40	3000K	3576	89
		3500K	3697	92
		4000K	3653	91

VERSA SLIM 1.3"

Pendant | Architectural LED Linear




DIMENSIONS




MOUNTING

Canopy Style

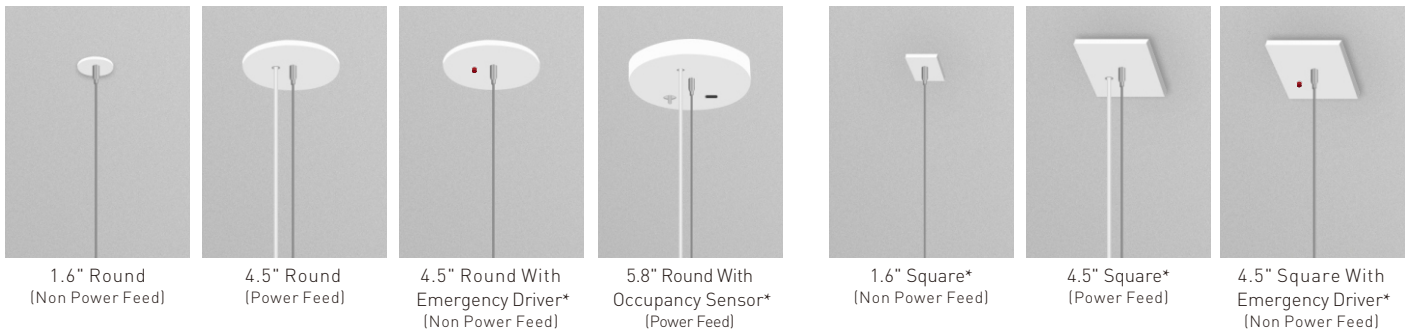



Dry Ceiling / Off Grid

"Various Hard Ceilings"
(Mount to J-box)



Drop Ceiling / On Grid*

Suspending the luminaire in the T-grid. Compatible for various T-grid, including 9/16" Flat, 9/16" Slot, 15/16" Flat.

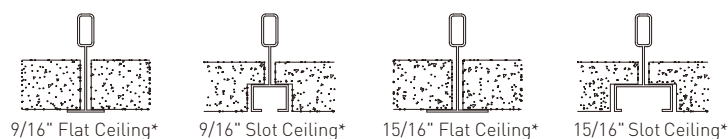

Please see the installation instruction for more details.


*Additional lengths and mounting options available via Special Order. Call 1-800-624-4488.

Standard Line Runs In 120v


Luminaire Run Length (ft)	Run Configuration	Line Joiner	5' Power Cable	5' Aircraft Cable	Canopy
2	2'	-	1	2	2
4	4'	-	1	2	2
6	4'+2'	1	1	3	3
8*	8'*	-	1	2	2
10	8'+2'	1	1	3	3
12	8'+4'	1	1	3	3
14	8'+4'+2'	2	1	4	4
16	8'+8'*	1	1	3	3
18	8'+8'+2'	2	1	4	4
20	8'+8'+4'	2	1	4	4
22	8'+8'+4'+2'	3	1	5	5
24	8'+8'+8'*	2	1	4	4
26	8'+8'+8'+2'	3	1	5	5
28	8'+8'+8'+4'	3	1	5	5
30	8'+8'+8'+4'+2'	4	1	6	6
32	8'+8'+8'+8'*	3	1	5	5
34	8'+8'+8'+8'+2'	4	1	6	6
36	8'+8'+8'+8'+4'	4	1	6	6
38	8'+8'+8'+8'+4'+2'	5	1	7	7
40	8'+8'+8'+8'+8'*	4	1	6	6
42	8'+8'+8'+8'+8'+2'	5	2	7	7
44	8'+8'+8'+8'+8'+4'	5	2	7	7
46	8'+8'+8'+8'+8'+4'+2'	6	2	8	8
48	8'+8'+8'+8'+8'+8'*	5	2	7	7

Note: 4.5" canopy is designed for power cable
 *Additional lengths available via special order. Call 1-800-624-4488.

Individual

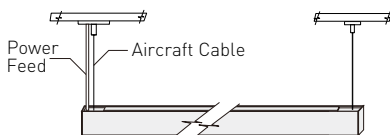


Continuous Run

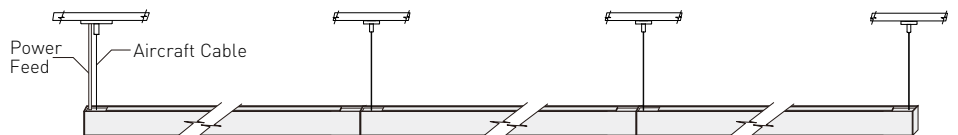

120VAC: Connections up to 40ft.
 277VAC: Connections up to 100ft.

Custom Pattern With Joiners

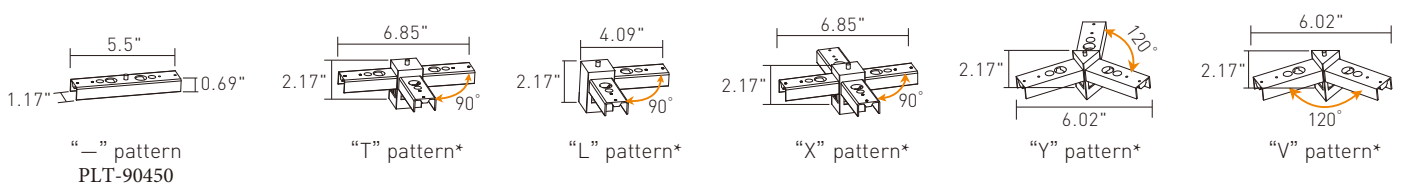

*Optional line joiners available via Special Order. Call 1-800-624-4488