




## Architectural LED Linear Light - Gold Finish

This architectural linear light is the perfect solution for your modern interior lighting. It's easy to combine multiple of the pendants light to create a stylish ambiance. The selectable DIP switches for power, CCT and up and down lighting offers flexibility to achieve precise configuration to fulfill any architectural and light level requirement. Ideal for using in offices, conference rooms, hallways, educational facilities, and more.

- Watt and CCT selectable
- PF > 0.9
- THD < 20%
- 5 years warranty
- Adjustable light distribution
  - ① UP:100% & DOWN:0%
  - ② UP:70% & DOWN:30%
  - ③ UP:50% & DOWN:50%
  - ④ UP:30% & DOWN:70%
  - ⑤ UP:0% & DOWN:100%

### Certifications

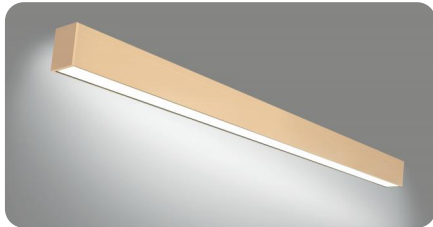


Down light



Up light



CCT and Wattages Tunable

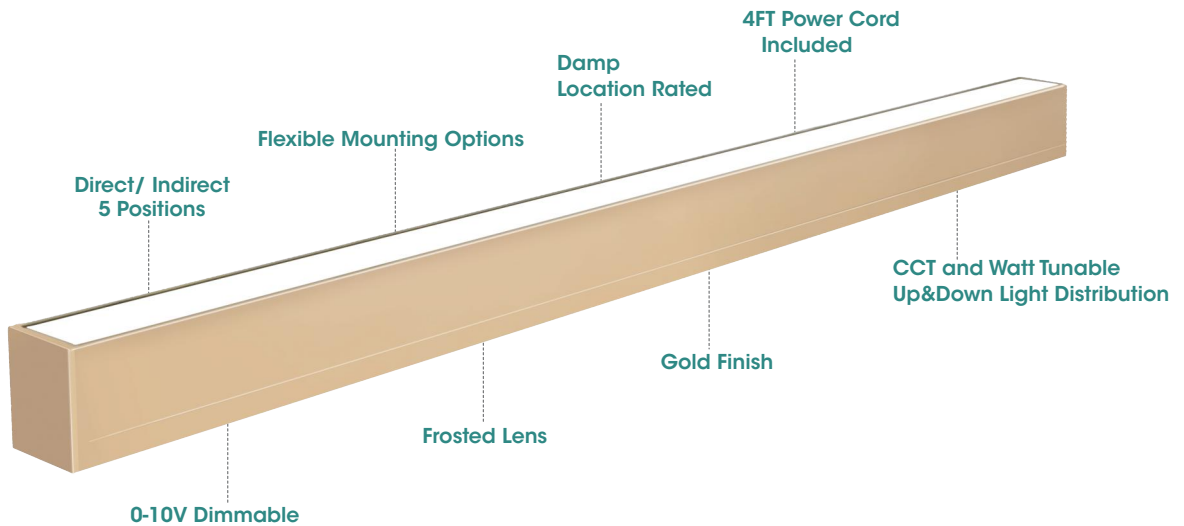

Model	Watt Selectable	Input Voltage	LPW	Typical Lumen	CCT Selectable	CRI	Dimmable	Max linkable watt	Operating Mode	Finish Colour	Dimension (Inch)	DLC 5.1 Standard Part #
PLT-90510	25W/20W/15W/10W	120-277V/ 120-347V	115 Lm/w	2945lm	30K/35K/40K/50K/57K Selectable	>80	0-10V	600W @ 120V 1200W @ 277V	Uplight/ Downlight Selectable	Gold	23.62"x2.2"x3"	PLTSU42111
PLT-90511	35W/30W/25W/20W			4087m							35.43"x2.2"x3"	PLTSU43211
PLT-90512	50W/45W/40W/35W			5884lm							47.24"x2.2"x3"	PLTSU44311
PLT-90513	100W/90W/75W/60W			11768lm							94.48"x2.2"x3"	PLTSU48411

# DIP Switches for Watt/CCT/Up&Down Light Distribution



**CCT Selectable**  
30K/35K/40K/50K/57K (preset at 50K)

**Watt Selectable**  
2FT: 25W 20W 15W 10W (preset at 25W)  
3FT: 35W 30W 25W 20W (preset at 35W)  
4FT: 50W 45W 40W 35W (preset at 50W)  
8FT: 100W 90W 75W 60W (preset at 100W)

**Up&Down Light Distribution**  
① Up: 100% & Down: 0%  
② Up: 70% & Down: 30%  
③ Up: 50% & Down: 50%  
④ Up: 30% & Down: 70% (preset)  
⑤ Up: 0% & Down: 100%

## Adjustable up&down light distribution (5 positions)

5 UP&Down Light Distribution Modes (Lumens based on 50K CCT)							
Model#	Total Watt	Up	Up Watt	Up Lumen Output	Down	Down Watt	Down Lumen Output
PLT-90510	25W	0%	0W	0	100%	25W	2875lm
		30%	7W	805lm	70%	18W	2070lm
		50%	12.5W	1437.5lm	50%	12.5W	1437.5lm
		70%	18W	2070lm	30%	7W	805lm
		100%	25W	2875lm	0%	0W	0
PLT-90511	35W	0%	0W	0	100%	35W	4025lm
		30%	10.5W	1207.5lm	70%	24.5W	2817.5lm
		50%	17.5W	2012.5lm	50%	17.5W	2012.5lm
		70%	24.5W	2817.5lm	30%	10.5W	1207.5lm
		100%	35W	4025lm	0%	0W	0
PLT-90512	50W	0%	0W	0	100%	50W	5750lm
		30%	15W	1725lm	70%	35W	4025lm
		50%	25W	2875lm	50%	25W	2875lm
		70%	35W	4025lm	30%	15W	1725lm
		100%	50W	5750lm	0%	0W	0
PLT-90513	100W	0%	0W	0	100%	100W	11500lm
		30%	30W	3450lm	70%	70W	8050lm
		50%	50W	5750lm	50%	50W	5750lm
		70%	70W	8050lm	30%	30W	3450lm
		100%	100W	11500lm	0%	0W	0






## Selectable Table



SKU	Watt	CCT	Lumens	Efficacy
PLT-90510	10W	3000K	1175	118
		3500K	1177	118
		4000K	1154	115
		5000K	1145	115
		5700K	1140	114
	15W	3000K	1776	118
		3500K	1776	118
		4000K	1754	116
		5000K	1742	116
		5700K	1725	115
	20W	3000K	2360	118
		3500K	2343	117
		4000K	2423	121
		5000K	2306	115
		5700K	2290	114
	25W	3000K	2939	117
3500K		2945	117	
4000K		2921	116	
5000K		2898	115	
5700K		2871	114	
PLT-90511	20W	3000K	2367	118
		3500K	2348	117
		4000K	2341	117
		5000K	2372	118
		5700K	2358	117
	25W	3000K	2939	117
		3500K	2934	117
		4000K	2933	117
		5000K	2913	116
		5700K	2899	115
	30W	3000K	3403	113
		3500K	3408	113
		4000K	3413	113
		5000K	3406	113
		5700K	3388	112
	35W	3000K	4007	114
3500K		4087	116	
4000K		4012	114	
5000K		3987	113	
5700K		3953	112	
PLT-90512	35W	3000K	4029	115
		3500K	4041	115
		4000K	4072	116
		5000K	4085	116
		5700K	4088	116
	40W	3000K	4601	115
		3500K	4599	114
		4000K	4637	115
		5000K	4647	116
		5700K	4644	116
	45W	3000K	5101	113
		3500K	5108	113
		4000K	5150	114
		5000K	5158	114
		5700K	5145	114
	50W	3000K	5760	115
3500K		5884	117	
4000K		5852	117	
5000K		5858	117	
5700K		5835	116	
PLT-90513	60W	3000K	7101	118
		3500K	7044	117
		4000K	7023	117
		5000K	7116	118
		5700K	7074	117
	75W	3000K	8817	117
		3500K	8802	117
		4000K	8799	117
		5000K	8739	116
		5700K	8697	115
	90W	3000K	10202	113
		3500K	10216	113
		4000K	10300	114
		5000K	10316	114
		5700K	10290	114
	100W	3000K	11520	115
3500K		11768	117	
4000K		11704	117	
5000K		11716	117	
5700K		11670	116	

## Accessories



### Suspension Mount – Included

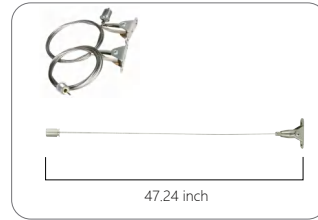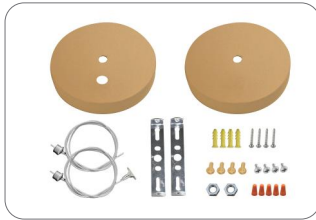

### Continuous Run Kit – PLT-90518 (Sold Separately) Compatible w/ PLT-90510, PLT-90511, PLT-90512, PLT-90513

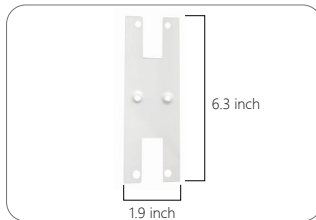

### Wall Mount Bracket\*

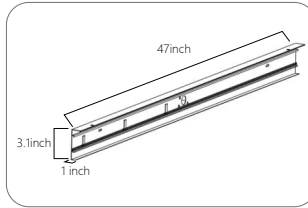

2ft

4ft

### Cuttable PC Cover –Optional\*



*\*Optional accessories are available via Special Order. Please call 1-800-624-4488.*