


Architectural LED Linear Light - Dark Wood Finish

This wood architectural linear light is the perfect solution for your modern interior lighting. It's easy to combine multiple of the pendants light to create a stylish ambiance. The selectable DIP switches for power, CCT and up and down lighting offers flexibility to achieve precise configuration to fulfill any architectural and light level requirement. Ideal for using in offices, conference rooms, hallways, educational facilities, and more.

- Watt and CCT selectable
- PF>0.9
- THD< 20%
- 5years warranty
- Adjustable light distribution
 - ① UP:100% & DOWN:0%
 - ② UP:70% & DOWN:30%
 - ③ UP:50% & DOWN:50%
 - ④ UP:30% & DOWN:70%
 - ⑤ UP:0% & DOWN:100%

Certifications

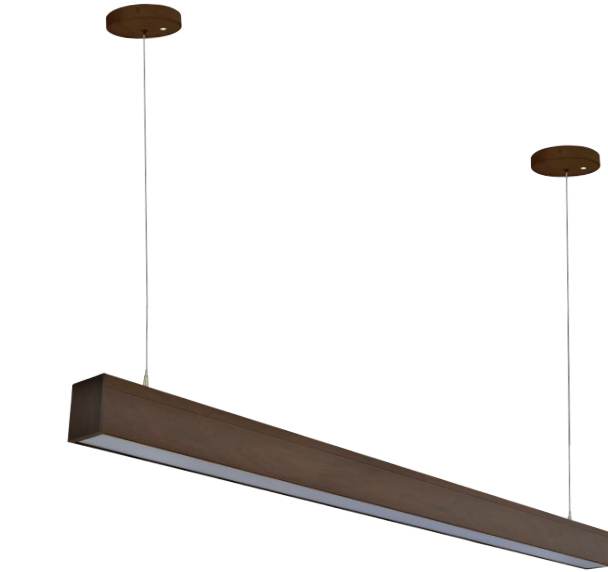

Down light



Up light



CCT and Wattages Tunable



Model	Watt Selectable	Input Voltage	LPW	Typical Lumen	CCT Selectable	CRI	Dimmable	Max linkable watt	Operating Mode	Finish Colour	Dimension (Inch)	DLC 5.1 Standard Part #
PLT-90514	25W/20W/15W/10W	120-277V/ 120-347V	115 Lm/w	2945lm	30K/35K/40K/50K/57K Selectable	>80	0-10V	600W@120V 1200W@277V	Uplight/ Downlight Selectable	Dark Wood	23.62"x2.2"x3"	PLTSU42111
PLT-90515	35W/30W/25W/20W			4087m							35.43"x2.2"x3"	PLTSU43211
PLT-90516	50W/45W/40W/35W			5884lm							47.24"x2.2"x3"	PLTSU44311
PLT-90517	100W/90W/75W/60W			11768lm							94.48"x2.2"x3"	PLTSU48411

DIP Switches for Watt/CCT/Up&Down Light Distribution



CCT Selectable
30K/35K/40K/50K/57K(preset at 50K)

Watt Selectable
2FT: 25W 20W 15W 10W(preset at 25W)
3FT: 35W 30W 25W 20W(preset at 35W)
4FT: 50W 45W 40W 35W(preset at 50W)
8FT: 100W 90W 75W 60W(preset at 100W)

Up&Down Light Distribution
①Up:100%& Down: 0%
②Up: 70% & Down: 30%
③Up: 50% & Down: 50%
④Up: 30% & Down: 70% (preset)
⑤Up: 0% & Down: 100%

Adjustable up&down light distribution(5 positions)

5 UP&Down Light Distribution Modes (Lumens based on 50K CCT)

Model#	Total Watt	Up	Up Watt	Up Lumen Output	Down	Down Watt	Down Lumen Output
PLT-90514	25W	0%	0W	0	100%	25W	2875lm
		30%	7W	805lm	70%	18W	2070lm
		50%	12.5W	1437.5lm	50%	12.5W	1437.5lm
		70%	18W	2070lm	30%	7W	805lm
		100%	25W	2875lm	0%	0W	0
PLT-90515	35W	0%	0W	0	100%	35W	4025lm
		30%	10.5W	1207.5lm	70%	24.5W	2817.5lm
		50%	17.5W	2012.5lm	50%	17.5W	2012.5lm
		70%	24.5W	2817.5lm	30%	10.5W	1207.5lm
		100%	35W	4025lm	0%	0W	0
PLT-90516	50W	0%	0W	0	100%	50W	5750lm
		30%	15W	1725lm	70%	35W	4025lm
		50%	25W	2875lm	50%	25W	2875lm
		70%	35W	4025lm	30%	15W	1725lm
		100%	50W	5750lm	0%	0W	0
PLT-90517	100W	0%	0W	0	100%	100W	11500lm
		30%	30W	3450lm	70%	70W	8050lm
		50%	50W	5750lm	50%	50W	5750lm
		70%	70W	8050lm	30%	30W	3450lm
		100%	100W	11500lm	0%	0W	0





Selectable Table



SKU	Watt	CCT	Lumens	Efficacy
PLT-90514	10W	3000K	1175	118
		3500K	1177	118
		4000K	1154	115
		5000K	1145	115
		5700K	1140	114
	15W	3000K	1776	118
		3500K	1776	118
		4000K	1754	116
		5000K	1742	116
	20W	5700K	1725	115
		3000K	2360	118
		3500K	2343	117
		4000K	2423	121
	25W	5000K	2306	115
		5700K	2290	114
		3000K	2939	117
3500K		2945	117	
PLT-90515	20W	4000K	2921	116
		5000K	2898	115
		5700K	2871	114
		3000K	2367	118
		3500K	2348	117
	25W	4000K	2341	117
		5000K	2372	118
		5700K	2358	117
		3000K	2939	117
	30W	3500K	2934	117
		4000K	2933	117
		5000K	2913	116
		5700K	2899	115
	35W	3000K	3403	113
		3500K	3408	113
		4000K	3413	113
5000K		3406	113	
PLT-90516	35W	5700K	3388	112
		3000K	4007	114
		3500K	4087	116
		4000K	4012	114
	40W	5000K	3987	113
		5700K	3953	112
		3000K	4029	115
		3500K	4041	115
	45W	4000K	4072	116
		5000K	4085	116
		5700K	4088	116
		3000K	4601	115
	50W	3500K	4599	114
		4000K	4637	115
		5000K	4647	116
		5700K	4644	116
PLT-90517	60W	3000K	5101	113
		3500K	5108	113
		4000K	5150	114
		5000K	5158	114
		5700K	5145	114
	75W	3000K	5760	115
		3500K	5884	117
		4000K	5852	117
		5000K	5858	117
	90W	5700K	5835	116
		3000K	7101	118
		3500K	7044	117
		4000K	7023	117
	100W	5000K	7116	118
		5700K	7074	117
		3000K	8817	117
3500K		8802	117	
100W	4000K	8799	117	
	5000K	8739	116	
	5700K	8697	115	
	3000K	10202	113	
100W	3500K	10216	113	
	4000K	10300	114	
	5000K	10316	114	
	5700K	10290	114	
100W	3000K	11520	115	
	3500K	11768	117	
	4000K	11704	117	
	5000K	11716	117	
100W	5700K	11670	116	

Accessories


Suspension Mount – Included

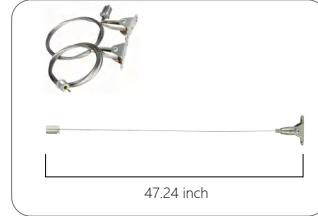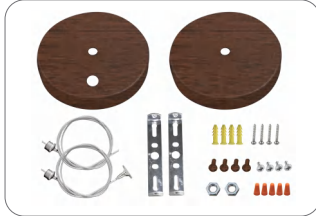


Continuous Run Kit – PLT-90519 (Sold Separately) Compatible w/ PLT-90514, PLT-90515, PLT-90516, PLT-90517

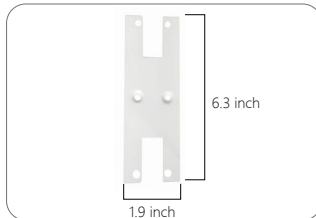

Wall Mount Bracket – PLT-90520 (Sold Separately) Compatible w/ PLT-90516



2ft

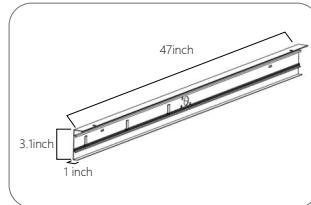

4ft

Cuttable PC Cover –Optional*



**Optional accessories available via Special Order. Please call 1-800-624-4488.*