


lampar **ARCH**

LLHB | Tiny

Quicksheet

150W | 220W

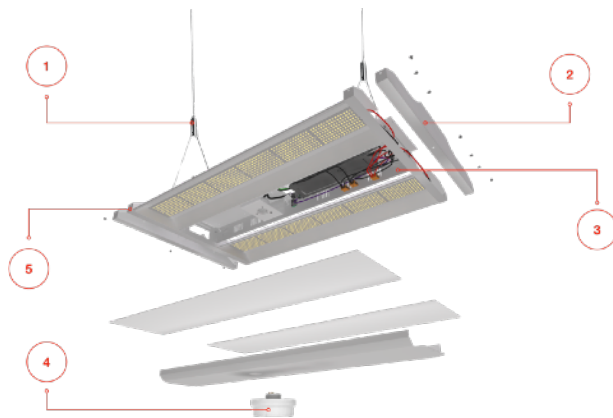

Model Specifications

Model	Watt (W)	Lumens (LM)	Efficacy (lm/W) ¹	CCT (K)	Voltage (V)
LLHB150	150W	21,750lm	145lm/W	4000K 5000K	120-277V 277-480V
LLHB220	220W	31,460lm	143lm/W		

Ordering Guide¹

Model Series	Wattage (W)	Voltage (V)	Series	CCT (K)
LLHB LED Linear High-Bay	085 85W ² 150 150W 220 220W	- U 120-277V H 277-480V ³	T Tiny	50 5000K
CATALOG #:				
LLHB	-		T	50

Options Guide⁴

EM Driver ⁶	Motion Sensor	Power Cord / Whip / Plugs ⁵	Step-Down Transformer	Surge Protection (In-Line) ⁸	Wire Guard & Mounts
<input type="checkbox"/> EM20⁸ 20W EM Driver <input type="checkbox"/> JBX⁸ Mounting J-Box for EM Driver	<input type="checkbox"/> BLS PIR Bi-Level Sensor <input type="checkbox"/> RM Remote Control (for bi-level sensor) <input type="checkbox"/> NLC blue@ARCH™ Controls PIR Bi-Level Sensor	<input type="checkbox"/> 6C/3 6FT cord, with plug (3-wire: L/N/G) <input type="checkbox"/> 15W/5 15FT whip, no plug (5-wire: L/N/G + 0-10V) Twist lock options (Compatible to 6C/3) <input type="checkbox"/> L5-15P <input type="checkbox"/> L5-20P <input type="checkbox"/> L6-15P <input type="checkbox"/> L7-15P <input type="checkbox"/> L7-20P <input type="checkbox"/> L8-20P	<input type="checkbox"/> 325 325Amp / 260W Max <input type="checkbox"/> BSD Mounting Bracket for SDT	<input type="checkbox"/> SP10U 10KV _a / 277V <input type="checkbox"/> SP10H 10KV _a / 480V <input type="checkbox"/> SP20U 20KV _a / 277V <input type="checkbox"/> SP20H 20KV _a / 480V	<input type="checkbox"/> WG150 Wire Guard (150W Max) <input type="checkbox"/> WG220 Wire Guard (220W Max) <input type="checkbox"/> PDM Pendant Kit <input type="checkbox"/> SFM Surface Kit <input type="checkbox"/> SPM Suspension Kit ⁷
OPTIONAL ACCESSORIES #:					
/ / / / /					

NOTE:

- Only one selection may be applicable within the same category.
- 85W special order, made to order
- For 480Vin applications, reference Step-Down Transformer in the Options Guide.
- Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
- Standard cord length = 1.0FT
- Standard driver on-board SPD = 6KV_a
- Standard 6FT suspension kit is included with fixture (**SPM**).
- When ordering the EM Driver, the J-Box **MUST** be included with the order

Project Details

Project Name:

Fixture Schedule:

Project Number:

Notes:

Physical Features

- Advanced Thermal Management Anti-Rust Steel frame with White Coat Finish. Suitable for Suspended Pendant and Surface Mount
- Suspended Mount Aircraft Cables Standard
- Optional Emergency Driver
- Optional Microwave/PIR Motion Sensor
- Threaded Conduit

Certifications



Applications



Product Warranty *



* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508