




all-in-one
Design ↓



All-in-one design with solar panel, light engine and battery built into the fixture. Completely off-grid, no need for wiring or trenching. Easy to install on a standard 3 inch pole w/ supplied screws.

- Comparable to 150W HID.
- Perfect for parks, city streets, school campuses and any pedestrian walkway.
- Automatically turns on at night and can be set to different operating modes including constant output and bi-level dimming with motion sensing.
- Constructed of strong & lightweight aluminum alloy.
- 3.2V/50AH LiFePO4 battery.
- 165 lumens per watt.
- See pg. 2 for dimensions.
- See pg. 3 for photometrics.

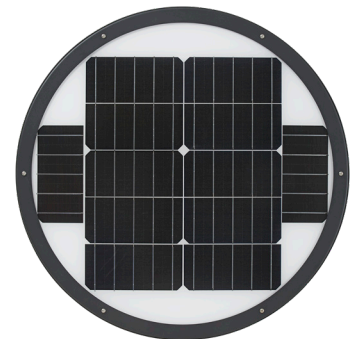

BATTERY
CHARGE TIME

BATTERY
CHARGE TEMP

BATTERY
LIFE*

REPLACEABLE
BATTERY

BEAM ANGLE

OPERATING TEMP

50,000hrs
RATED LIFE

PART #	UPC	COMPARES TO	LUMENS	COLOR	LISTINGS
SL-CPT-25L-30K-BK-G1	844006088385	150W	2500	3000K	CE FC
SL-CPT-25L-40K-BK-G1	844006088392			4000K	

ACCESSORIES

PART #	DESCRIPTION	OPERATING MODES
SL-CPT-BATTERY	REPLACEMENT BATTERY	 CONSTANT BRIGHTNESS  TIMER  MOTION SENSING

* ON 2HR + SENSOR MODE.

Light Efficient Design

847.380.3540 • led-llc.com • sales@led-llc.com



solera-solar.com



SOLAR PATHWAY LIGHT




OFF-GRID

PART NUMBER BUILDER

MFR	PRODUCT	LUMENS	COLOR TEMP	FIXTURE COLOR	GENERATION
SL	CPT	25L		BK	G1
(SOLERA)	(CIRCULAR POST TOP)	(2500 LUMENS)	30K (3000K) 40K (4000K)	(BLACK)	(GENERATION 1)

EXAMPLE PART NUMBER SL-CPT-25L-30K-BK-G1

DIMENSIONS

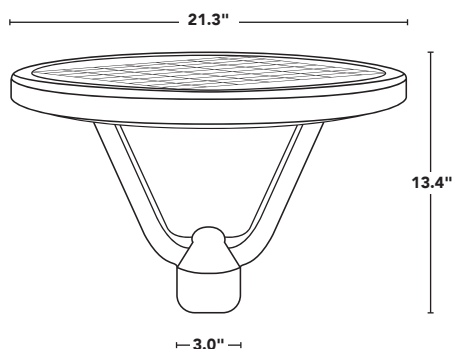

Light Efficient Design

847.380.3540 • led-llc.com • sales@led-llc.com







PHOTOMETRICS

FOOT CANDLES	ISO-LINE COLOR	
1 FC	BLACK	
0.5 FC	MAGENTA	
0.1 FC	BLUE	


ILLUMINANCE (FC)




MOUNTING HEIGHT : 8FT

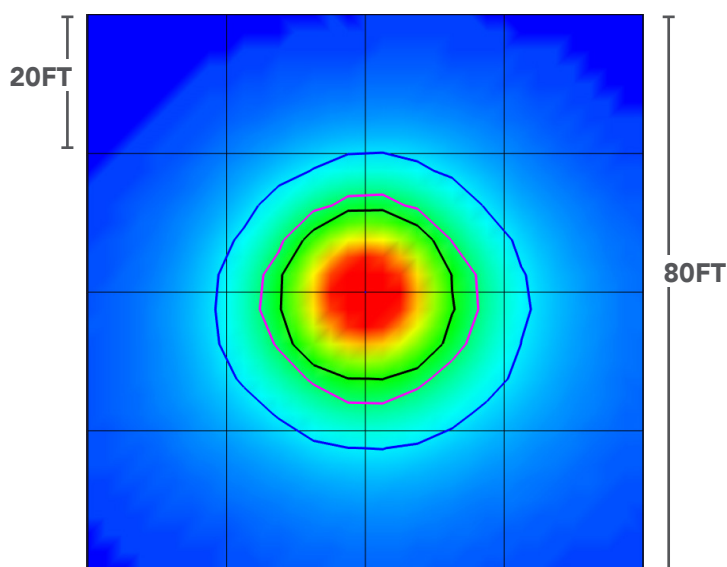

MOUNTING HEIGHT : 12FT

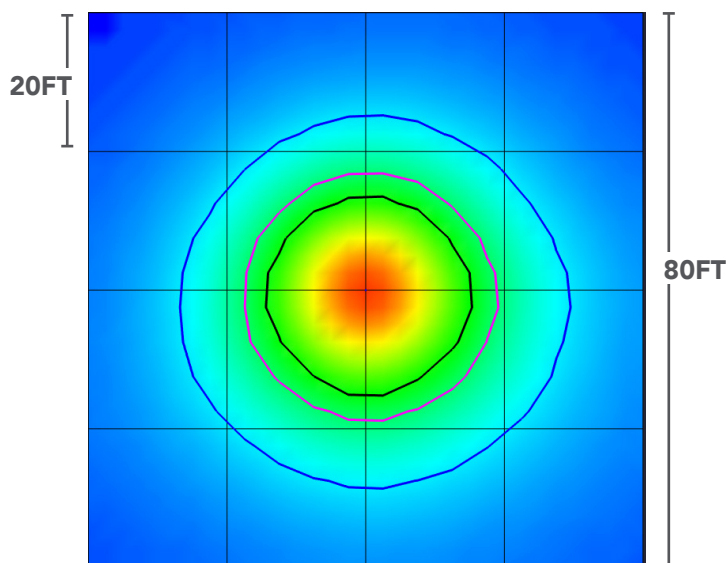

MOUNTING HEIGHT : 15FT

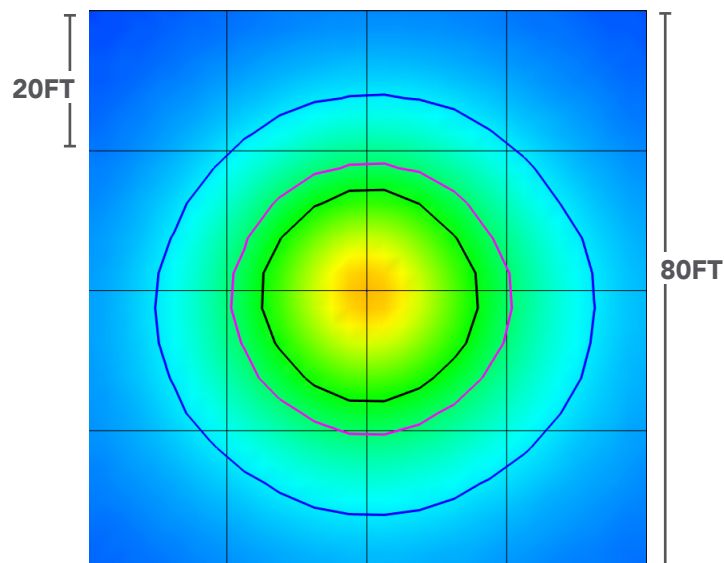

Light Efficient Design

847.380.3540 • led-llc.com • sales@led-llc.com

