DLM WIRED STANDARD SWITCHES

LMSW-200 SERIES



Low voltage pushbutton switches for control of multiple loads

Customizable buttons with LED status indicators

Plug n' Go automatic configuration and Push n' Learn for personalization

IR transceiver for wireless configuration and remote control

Plug to other components using Cat 5e cables with RJ45 connectors eliminating wiring errors





DESCRIPTION

LMSW-200 Series Wall Switches are programmable, low voltage devices for manual on/off, dimming, and scene control of one or more loads from one or more locations. They are part of the Digital Lighting Management (DLM) system and can control any load(s) connected to DLM room controllers.

OPERATION

LMSW-200 Series Switches operate on Class 2 power supplied to a DLM local network by one or more room controllers. The switches send a digital signal whenever a button or rocker is pressed by a user. Plug n' Go™ automatic configuration assigns on/off, dimming, or scene behaviors to each button and rocker based on the switch's button layout and the types and quantities of other connected loads. When multiple switches are installed, default operation is for multi-way control; each switch controls all of the loads on the system. Button assignments may be quickly reconfigured using Push n' Learn™. Any scenes created may be redefined by adjusting room lighting to the desired scene level, and pressing and holding a scene button. Additional switch settings may be changed using DLM configuration tools.

BUTTON FEATURES & IR COMMUNICATIONS

Each button and rocker has an LED showing the status of the load(s) or scene assigned to it. The single-zone dimmer LMSW-211 also has an LED ladder in the bezel to track and annunciate the light level of controlled loads. When an unassigned button is pressed, the LED will blink. Buttons ship with the standardized engraving shown here, but may be personalized with custom-engraved buttons. The IR transceiver in each switch allows two-way communication for wireless system configuration.

APPLICATIONS

LMSW-200 Series Wall Switches are recommended for virtually all applications, including commercial offices, education environments, and health care facilities. Multiple switch types and quantities can be used in the same switch gang or room to create the ideal, multi-way user control scheme. LMSW-200 Series Wall Switches increase energy savings and improve the return on investment of any Digital Lighting Management system.

FEATURES

- Software lockable configuration button, accessible without faceplate removal
- Digital Lighting Management components plug together on a free-topology Category 5e DLM local network
- Infrared (IR) transceiver for wireless configuration and control
- Sleek single gang devices fit decorator wall plates
- Switches may be used for multi-way control

- Each button and rocker can control individual or multiple loads. Buttons can instead control one scene. LED indicates status.
- Each button can be used to dim assigned loads
- Custom engraving available to replace standard engraving
- The product meets the materials restrictions of RoHS

PROJECT LOCATION/ TYPE

1


SPECIFICATIONS

- Input voltage: 24VDC from DLM local network
- · Current consumption: 5mA
- DLM local network connection: 2 RJ45 ports
- Many button configurations; LED status indicator for each button
- Infrared (IR) transceiver


- Operating conditions: for indoor use only;
 32-131°F (0-55°C); 5-95% RH, non-condensing
- UL and cUL listed
- FCC part 15 compliant
- Five year warranty

CONTROLS & MOUNTING


Product Controls, Dimensions and Models

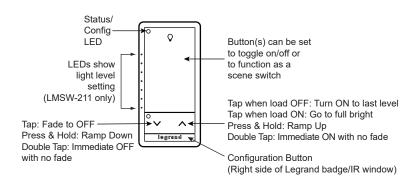

Mounting

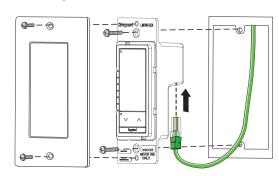


LMSW-200 Series Switches fit in standard single gang boxes.

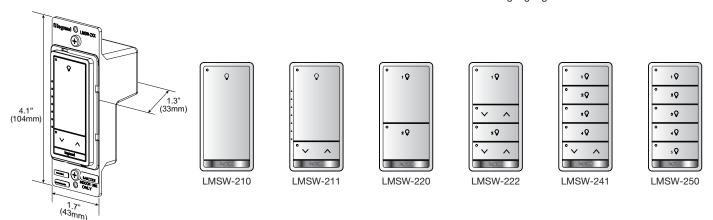

CONNECTING

Sample Connection Diagram with Multi-way Bi-level Control

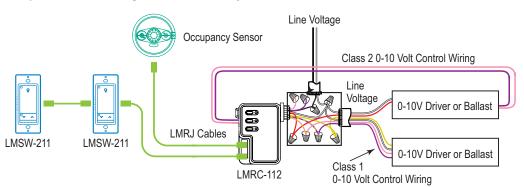

Plug DLM local network components together in any configuration using Cat 5e cables with RJ45 connectors.

www.legrand.us/wattstopper _____ designed to be better-

ORDERING INFORMATION

Catalog #		Color	Description
	LMSW-210-W	White	
	LMSW-210-LA	Light Almond	
	LMSW-210-I	lvory	1-Button Standard Wall Switch
	LMSW-210-GRY	Gray	
	LMSW-210-BK	Black	Common Aplication Single-zone On/Off
	LMSW-210-BR	Brown	
	LMSW-210-RED	Red	
	LMSW-211-W	White	
	LMSW-211-LA	Light Almond	
	LMSW-211-I	lvory	1-Button, 1-Rocker Standard Wall Switch
	LMSW-211-GRY	Gray	
	LMSW-211-BK	Black	Common Aplication Single-zone Dimming
	LMSW-211-BR	Brown	
	LMSW-211-RED	Red	
	LMSW-220-W	White	
	LMSW-220-LA	Light Almond	
	LMSW-220-I	lvory	2-Button Standard Wall Switch
	LMSW-220-GRY	Gray	0
	LMSW-220-BK	Black	Common Aplication Dual-zone On/Off
	LMSW-220-BR	Brown	
	LMSW-220-RED	Red	
	LMSW-222-W	White	
	LMSW-222-LA	Light Almond	
	LMSW-222-I	lvory	2-Button, 2-Rocker Standard Wall Switch
	LMSW-222-GRY	Gray	Common And
	LMSW-222-BK	Black	Common Aplication Dual-zone Dimming
	LMSW-222-BR	Brown	
	LMSW-222-RED	Red	
	LMSW-241-W	White	
	LMSW-241-LA	Light Almond	4-Button, 1-Rocker
	LMSW-241-I	lvory	Standard Wall Switch
	LMSW-241-GRY	Gray	Common Aplication
	LMSW-241-BK	Black	Multi-zone Scene
	LMSW-241-BR	Brown	Control
	LMSW-241-RED	Red	

Catalog #		Color	Description			
	LMSW-250-W	White				
	LMSW-250-LA	Light Almond	5-Button			
	LMSW-250-I	lvory	Standard Wall Switch			
	LMSW-250-GRY	Gray	Common Aplication			
	LMSW-250-BK	Black	Multi-zone Load Control			
	LMSW-250-BR	Brown				
	LMSW-250-RED	Red				
	BAA/TAA Compliant Models*					
	LMSW-210-W-U	White	1-Button			
		VVIIIC	Standard Wall Switch			
	LMSW-211-W-U	White	Standard Wall Switch 1-Button, 1-Rocker Standard Wall Switch			
			1-Button, 1-Rocker			
	LMSW-211-W-U	White	1-Button, 1-Rocker Standard Wall Switch 2-Button			
	LMSW-211-W-U	White White	1-Button, 1-Rocker Standard Wall Switch 2-Button Standard Wall Switch 2-Button, 2-Rocker			

^{*}Product is compliant with Buy American Act and Trade Agreement Act.

Note: Switches do not include face plates. Order decorator style plate separately. Legrand radiant® plates are recommended for optimal color matching.

31964r5 Rev 11/23