



# ADVENTURE POWER®

UPG No. 42528

## UB14L-B2 Conventional Battery


This battery is specially designed as a high-performance battery used for motorcycles. The characteristics are high cranking AMPS, high vibration resistant and long cycle life.

### Specification

|   |                               |
|---|-------------------------------|
| <b>Nominal Voltage</b>                            | 12 Volts                      |
| <b>Nominal Capacity (10H-R)</b>                   | 14 Ah                         |
| <b>Approximate Weight (With Acid)</b>             | 9.26 lbs. (4.2 kgs)           |
| <b>Recommended Maximum Charging Current Limit</b> | 4.2A                          |
| <b>Equalization and Cycle Service</b>             | 14.8 VDC/unit Average at 25°C |
| <b>Cycle Life (JIS D 5302:2004)</b>               | 300                           |
| <b>Terminal Type</b>                              | D                             |



### Physical Dimensions: in (mm)

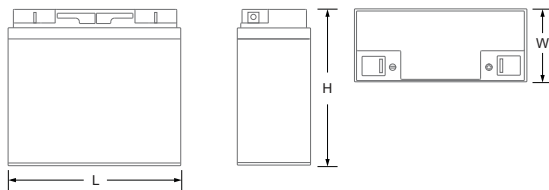

**L:** 5.28" (134mm) **H:** 6.54" (166mm) **W:** 3.50" (89mm)  
All data subject to change without notice.

### Terminal Configuration



### Polarity



Front



Side



Terminals

### Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle.
- Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Fill all cells to the "FULL" mark and wait 30 minutes.
- After 30 minutes, any cell that has settled below the "FULL" mark should be topped off to the "FULL" mark.
- Replace the sealer caps before charging the battery.

### Charging Instructions

- Charge the battery fully before installing.
- Never charge this battery with a charger that delivers more than 4 amps of current. Larger chargers will harm the battery.
- For optimum performance, UPG recommends charging and maintaining with the Energizer® Maintainer 4000 battery charger.
- This charger/ maintainer can remain connected to the battery indefinitely.

[www.upgi.com](http://www.upgi.com)