

### Specifications:

Lamp Type	Par 36	
Lamp Data	18W Unit	Two 6V 9W 939 Type Lamps
	27W Unit	Three 6V 9W 939 Type Lamps
	50W Unit	Three 12V 12W 939 Type Lamps (Capable for 1 12V Remote Head)
Emergency Operation	90 minutes	


### Listings & Certifications:



### Model: FHNY10



### Mechanical Data:

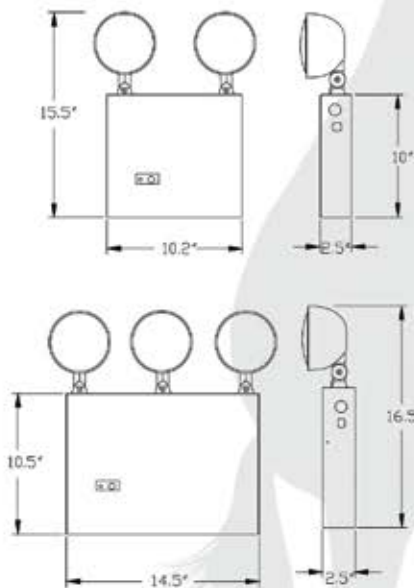

### Standard Features:

- Push-To-Test Switch
- LED Charge Indicator
- Maintenance-Free, 6V Or 12V Sealed Lead-Acid Battery
- Dual Voltage 120V/277V
- Specification Grade Design
- Universal Mounting Pattern Knockout In Backplate For J-Box Mounting
- Automatic Low Voltage Disconnect (LVD)
- Fully Adjustable Thermoplastic Lamp Heads
- Remote Capability Available With 9W Lamp, 12V-50W, 3 Heads
- White Powder Coat Finish
- Heavy Duty 20 Gauge Construction
- New York City Approved
- 18 Watts, 27 Watts or 50 Watts Rated Capacity For 90 Minutes of Emergency Power

### Ordering Information:

Base Model No.	Option
FHNY10	29 - Emergency Light with 6V, 18W Lead-Acid Battery, Two 9W Lamp Heads
	39 - Emergency Light with 6V, 27W Lead-Acid Battery, Three 9W Lamp Heads
	312 - Emergency Light with 12V, 50W Lead-Acid Battery, Three 12W Lamp Heads

Build part number by adding Base Model No., one of the Option codes. Example: FHNY1039