



Catalog Number	
Notes	Type

Indoor Decorative

Artisten Linear Design

Linear T8 Fluorescent



FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use in kitchens, offices and all rooms in the house.

ATTRIBUTES

Decorative scrollwork cast end caps available in antique bronze with an extruded white acrylic diffuser.

Utilizes (2) 17W or (2) 32W linear T8 straight tube fluorescent lamps for energy efficiency, superior color rendering and long life (not included).

Standard with 120 volt, 60Hz electronic ballast ensures no flickering and quiet operation without interfering with other electronics. Also available in other ballast configurations.


For use with non-dimmable switches only.

LISTING

CUL listed to US and Canadian standards and suitable for damp locations. Energy Star® qualified.

WARRANTY

Guaranteed for two years against mechanical defects in manufacture.

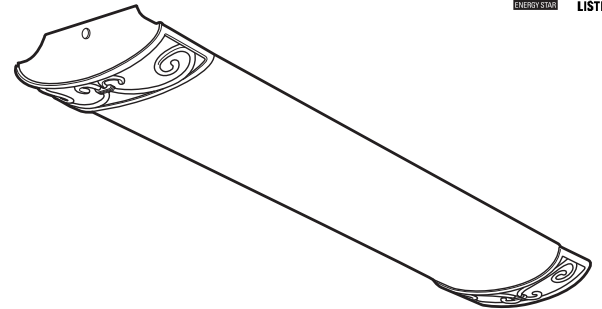


DIMENSIONS

Nominal Size	Lamp Configuration	Model Number	Number of Lamps	(A) Width inches (cm)	(B) Length inches (cm)	(C) Depth* inches (cm)
1' x 2'		10816 BZA	(2) 17W Linear T8	9-7/8" (25.1)	24-1/2" (62.2)	3-1/2" (8.9)
1' x 4'		10814 BZA	(2) 32W Linear T8	9-7/8" (25.1)	48-1/2" (123.2)	3-1/2" (8.9)

* Extension from ceiling

All dimensions are in inches (centimeters)

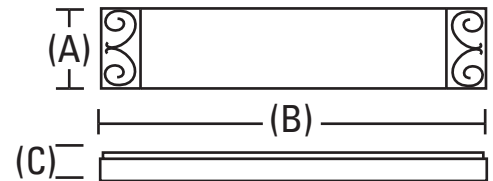

ORDERING INFORMATION

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog numbers.

Example: **10816 BZA**

Model Number ¹	BZA Features	Ballast/Voltage
10816 1'x2' - (2) 17W Linear T8 fluorescent lamps (not included)	BZA Antique Bronze	(blank) 120 volt residential electronic ballast (standard)
10814 1'x4' - (2) 32W Linear T8 fluorescent lamps (not included)		Other voltage and ballast types (Consult factory)

Accessories/Replacement parts

DFAL48 48" 2 light replacement diffuser

Notes:
1. Lamps not included.

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.